

love every drop  
anglianwater 

Revised Draft WRMP24  
Technical Document

# Water Resource Zone summaries



August 2023

# Table of contents

Introduction	1	Suffolk East	
<b>AREA 5: East Suffolk and Essex</b>	<b>3</b>	DO Summary	24
Essex Central		Population and Housing	25
DO Summary	4	DYAA Baseline SDB	26
Population and Housing	5	DYCP Baseline SDB	27
DYAA Baseline SDB	6	Demand Forecast and PCC	28
DYCP Baseline SDB	7	Demand Management Option Strategy	29
Demand Forecast and PCC	8	DYAA Final Plan SDB	30
Demand Management Option Strategy	9	DYCP Final Plan SDB	31
DYAA Final Plan SDB	10	Supply-side Strategy	32
DYCP Final Plan SDB	11	Non-Household sector	33
Supply-side Strategy	12		
Non-Household sector	13		
Essex South			
DO Summary	14		
Population and Housing	15		
DYAA Baseline SDB	16		
DYCP Baseline SDB	17		
Demand Forecast and PCC	18		
Demand Management Option Strategy	19		
DYAA Final Plan SDB	20		
DYCP Final Plan SDB	21		
Supply-side Strategy	22		
Non-Household sector	23		

# 1. Introduction

## 1.1 About our company

Anlian Water is the largest water and wastewater company in England and Wales geographically, covering 20% of the land area. We operate in the East of England, the driest region in the UK, receiving two-thirds of the national average rainfall each year; that's approximately 600mm. Our region has over 3,300km of rivers and is home to the UK's only wetland national park, the Norfolk Broads. Between 2011 and 2021, our region experienced the highest population increase in England. Despite this, we are still putting less water into our network than we did in 1989.

## 1.2 Planning for the long term

Our company Purpose is ***“to bring environmental and social prosperity to the region we serve through our commitment to Love Every Drop”***.

This purpose is at the heart of our business, having been enshrined in our Articles of Association in 2019. Central to delivering this purpose is planning for the long term; one of the strategic planning frameworks we use to achieve this is the Water Resources Management Plan (WRMP), which details how we will ensure resilient water supplies to our customers over the next 25 years. A WRMP looks for low regret investments for our region, giving flexibility to adapt to future challenges and opportunities such as technological advances, climate change, demand variations, and abstraction reductions.

## 1.3 What is a Water Resources Management Plan

We produce a WRMP every five years. It is a statutory document that sets out how a sustainable and secure supply of clean drinking water will be maintained for our customers. Crucially it takes a long-term view over 25 years, allowing us to plan an affordable, sustainable pathway that provides benefit to our customers, society and the environment.

Our previous WRMP, WRMP19, had an ambitious twin track strategy, combining an industry leading smart meter roll out and leakage ambition with a strategic pipeline across our region, bringing water from areas of surplus to areas of deficit.

This WRMP focusses on the period 2025 to 2050, and is known as WRMP24. We have developed it by following the Water Resources Planning Guideline (WRPG), as well as other relevant guidance, in order to meet statutory requirements.

## 1.4 Developing our WRMP

Our WRMP24 has been progressed following processes detailed in the WRPG. We start by determining the extent of the challenges we face between 2025 and 2050.

We achieve this by developing forecasts to establish the amount of water available to use (supply forecast) and the amount of water needed (demand forecast) in our region.

When these forecasts are combined, a baseline supply-demand balance is created. This tells us whether we have a surplus of water or a deficit, establishing our water needs for the planning period. An appraisal for both demand management options and supply-side options is undertaken.

We environmentally assess both demand management and supply-side options so we can understand their potential environmental impacts and what could be put in place to mitigate them.

The next step is for the water savings associated with the chosen demand management options to be added into our baseline supply-demand balance to determine if our region's water needs are met. If the demand management options savings do not solve the need, supply-side options are added into the modelling process and solution development.

## 1.5 Best value plan

To ensure we developed the right solution for our region's water needs, we have focussed on 'best value'. To us, best value is looking beyond cost and seeking to deliver a benefit to customers and society, as well as the environment, whilst listening and acting on the views of our customers and stakeholders.

## 1.6 Our revised draft WRMP24

Our best value plan, the revised draft WRMP24, has been produced following a public consultation on our draft WRMP24. This consultation ran from December 2022 to March 2023.

## 1.7 Strategic context of the revised draft WRMP24

Our revised draft WRMP24 aligns with our Purpose, as well as internal and external strategic plans and initiatives. We have worked collaboratively with internal and external stakeholders, regulators and other water abstractors to achieve this.

## 1.8 Guide to our draft WRMP24 submission

Our final submission comprises a non-technical customer and stakeholder summary, our main report and nine technical supporting documents and non-technical supporting documents.


# Introduction

**1.9** This report is concerned with the WRMP24 water resource zone summaries non-technical supporting document. The report summarises key supply and demand data for the 27 Water Resource Zones (WRZs) characterised in the WRMP24.

These WRZs have been grouped by region according to our problem characterisation analysis.

Resource Zone	Area
Suffolk Ixworth	Cambridgshire & West Suffolk
Suffolk Sudbury	Cambridgshire & West Suffolk
Suffolk Thetford	Cambridgshire & West Suffolk
Suffolk West & Cambs	Cambridgshire & West Suffolk
Essex Central	East Suffolk & Essex
Essex South	East Suffolk & Essex
Suffolk East	East Suffolk & Essex
Fenland	Fenland
Hartlepool	Hartlepool
Lincolnshire Bourne	Lincolnshire & Nottinghamshire
Lincolnshire Central	Lincolnshire & Nottinghamshire
Lincolnshire East	Lincolnshire & Nottinghamshire
Lincolnshire Retford and Gainsborough	Lincolnshire & Nottinghamshire
Norfolk Aylsham	Norfolk
Norfolk Bradenham	Norfolk
Norfolk East Dereham	Norfolk
Norfolk East Harling	Norfolk
Norfolk Happisburgh	Norfolk
Norfolk Harleston	Norfolk
Norfolk North Coast	Norfolk
Norfolk Norwich & the Broads	Norfolk
Norfolk Wymondham	Norfolk
Ruthamford Central	Ruthamford
Ruthamford North	Ruthamford
Ruthamford South	Ruthamford
Ruthamford West	Ruthamford

## Anglian Water WRMP24 water resource zones

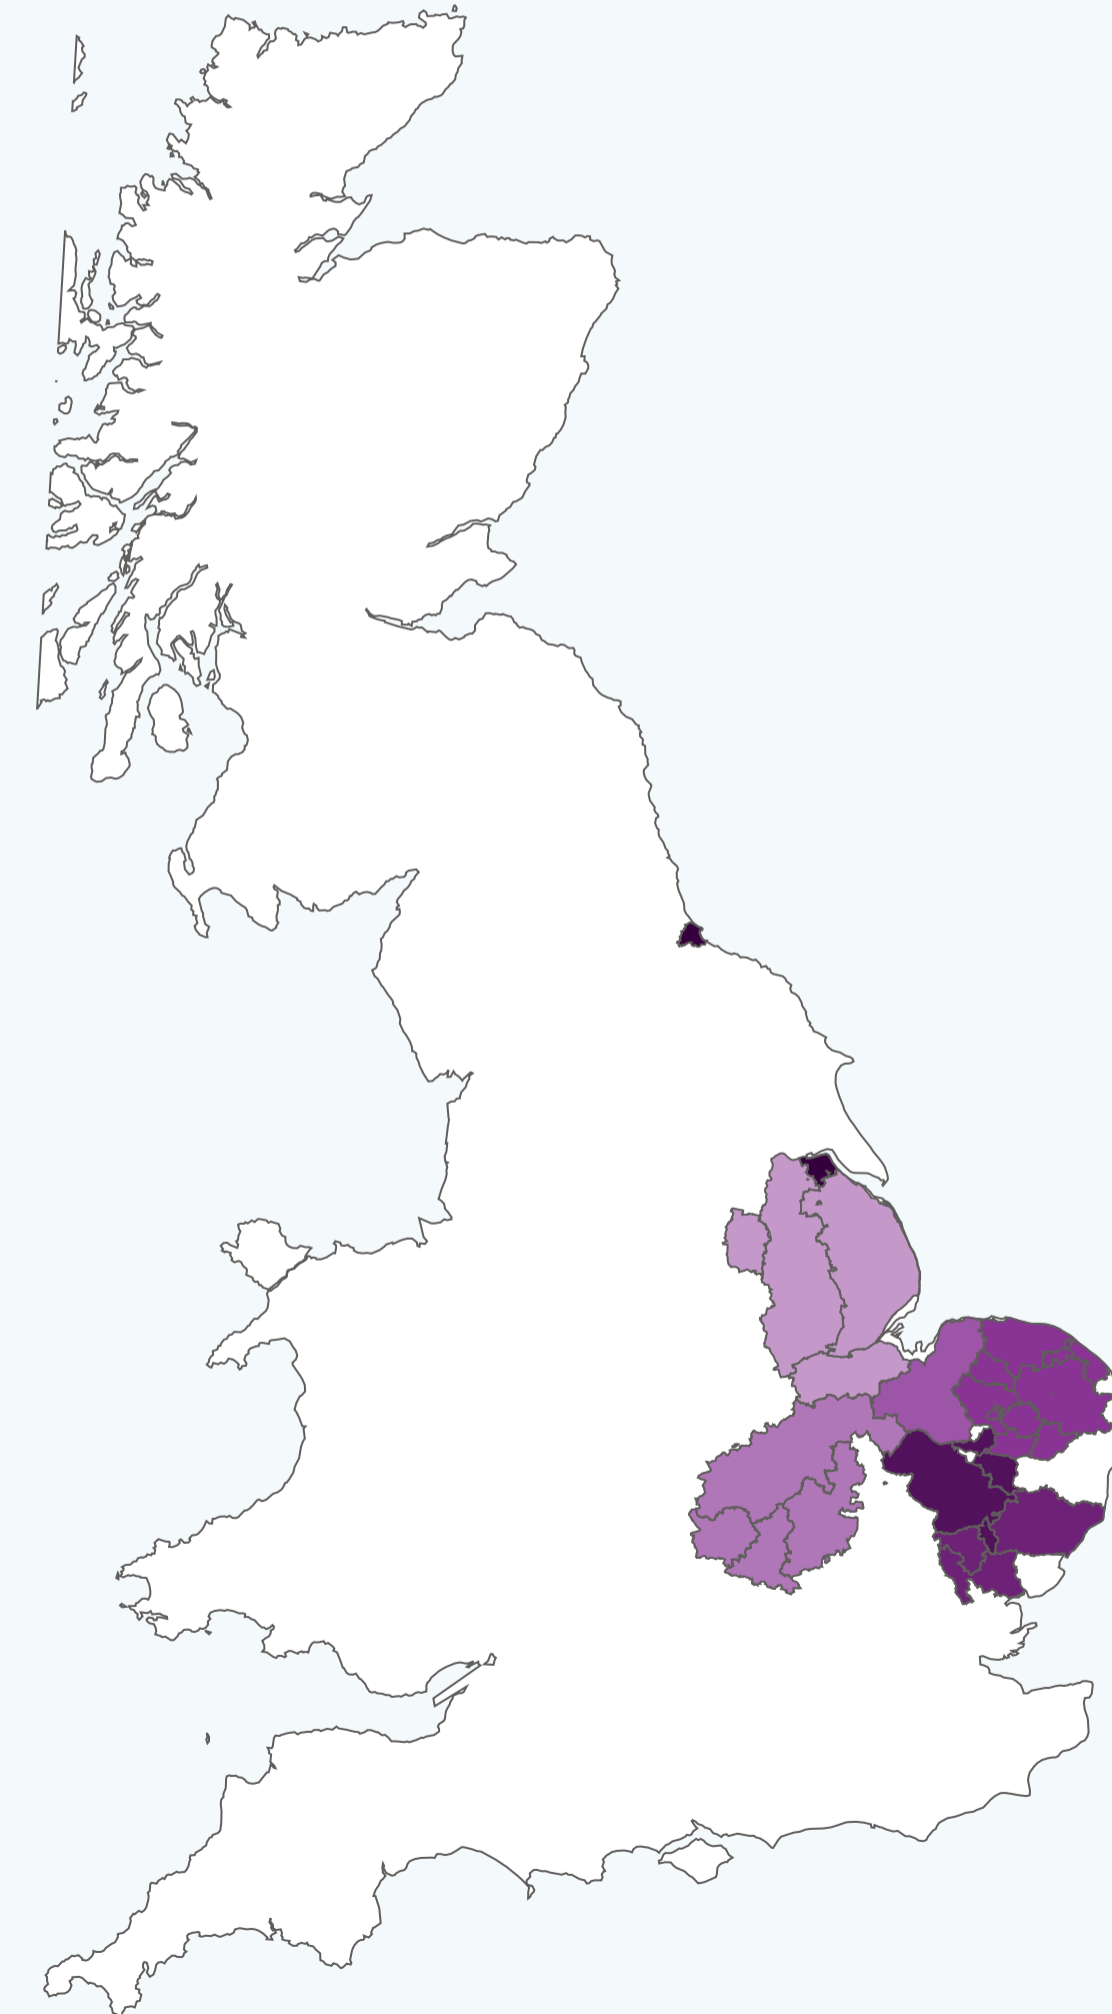

# 2. Strategic Overview

East Suffolk & Essex

## 2.1 Strategic risk and issues

East Suffolk and Essex will benefit from additional connectivity provided by our AMP7 strategic grid investments. The area experiences significant pressures from growth and climate change in the baseline scenario, resulting in significant deficits.

There is uncertainty over the growth associated with new towns, which is excluded from LAUA plans (and consequently the baseline scenario). Population and property growth forecasts have been based upon our most recent assessment of Local Authority planning projections (with a theoretical uplift for strategic growth in the Oxford/Cambridge region where appropriate).

The area is vulnerable to extreme drought, particularly at Ardleigh and Alton reservoirs.

Without additional mitigation there is potential for sustainability reductions to increase baseline scenario deficits in Environmental Destination scenarios. The impact of the Enhanced scenario is particularly large. Vulnerable catchments include East Suffolk and North Essex

Options available for this area include desalination, water reuse, and strategic transfers.

Figure 1 Problem Characterisation Area




Choose area

Cambridgeshire & West Suffolk	Fenland	Lincolnshire & Nottinghamshire	Ruthamford
<b>East Suffolk &amp; Essex</b>	Hartlepool	Norfolk	

### 3. Deployable Output summary

#### DYAA

#### Essex Central

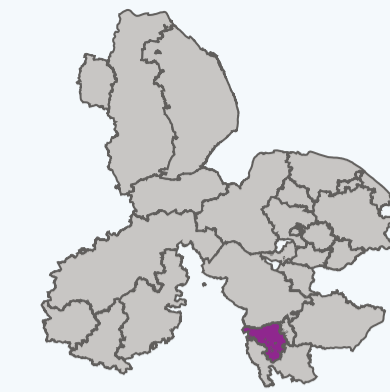

#### 3.1 Resource Zone geography: Essex Central:

The Central Essex WRZ covers an area of 314 sq. km and is based on the supply systems for Halstead. The water resource for this WRZ is entirely dependent on abstraction from the Suffolk Chalk aquifer.

#### 3.2

Baseline deployable output (including 1:500 drought): *10.0 MI/d*

#### Deployable output reductions

Restoring sustainable abstraction (recent actual average): *-0.9 MI/d*

Reductions to achieve environmental destination (BAU+): *-7.6 MI/d* by 2040.

Climate change: *0.0 MI/d* by 2050.

Baseline deployable output reduces by a total of *-8.5 MI/d* by 2050 a reduction of 84.3%.


**Table 3: supply characteristics (all values are MI/d)**

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
DO pre forecast changes	10.0	10.0	10.0	10.0	10.0
Change in DO due to climate change	0.0	0.0	0.0	0.0	0.0
DO reductions to restore sustainable abstraction	-0.9	-0.9	-0.9	-0.9	-0.9
DO reductions for Environmental Destination	0.0	0.0	0.0	-7.6	-7.6
Change in DO from drought measures	0.0	0.0	0.0	0.0	0.0
<b>Final DO</b>	<b>9.1</b>	<b>9.1</b>	<b>9.1</b>	<b>1.6</b>	<b>1.6</b>
Raw water losses (-ve)	-0.5	-0.5	-0.5	-0.5	-0.5
Outage Allowance (-ve)	-0.1	-0.1	-0.1	-0.1	-0.1
<b>WAFU (own sources)</b>	<b>8.6</b>	<b>8.6</b>	<b>8.6</b>	<b>1.1</b>	<b>1.1</b>
Net Transfers	0.0	0.5	0.3	7.4	7.4
Other benefits	0.91	0.30	0.30	0.30	0.30
<b>Total Water Available for Use</b>	<b>9.5</b>	<b>9.4</b>	<b>9.2</b>	<b>8.8</b>	<b>8.7</b>

**3.3** The baseline Deployable Output data presented in this section represents the Environment Agency's preferred sustainability reduction licence cap scenario. This includes recent actual average caps to time limited licences in 2022-24 and caps to all other permanent licences by 2030. The impact of 1:500 drought resilience has also been applied from 2025 rather than the preferred scenario of 2039/2040. These factors apply to the baseline forecast only. For the final plan forecast we have applied our best value scenario for licence caps, which was developed following an iterative process to deliver licence caps as early as possible. The transition to 1:500 drought resilience occurs in 2039/40 in the final plan forecast. Further information is available in the WRMP24 Decision Making technical supporting document, section 6.



# 4. Population & Housing

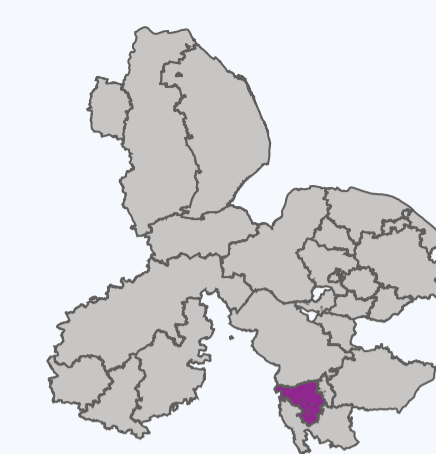


## Essex Central

4.1 Over the WRMP period, population in Essex Central is set to increase from 38650 in 2025 to 42730 in 2049-50 - this is an increase of 10.6 % over the 25 years.

Table 4a: Population totals (cumulative) by AMP

Year	Total Population (000s)
2029-30 (end of AMP8)	38.940
2034-35 (end of AMP9)	39.490
2039-40 (end of AMP10)	40.470
2044-45 (end of AMP11)	41.590
2049-50 (end of AMP12)	42.730

Figure 2: Total Resource Zone Population

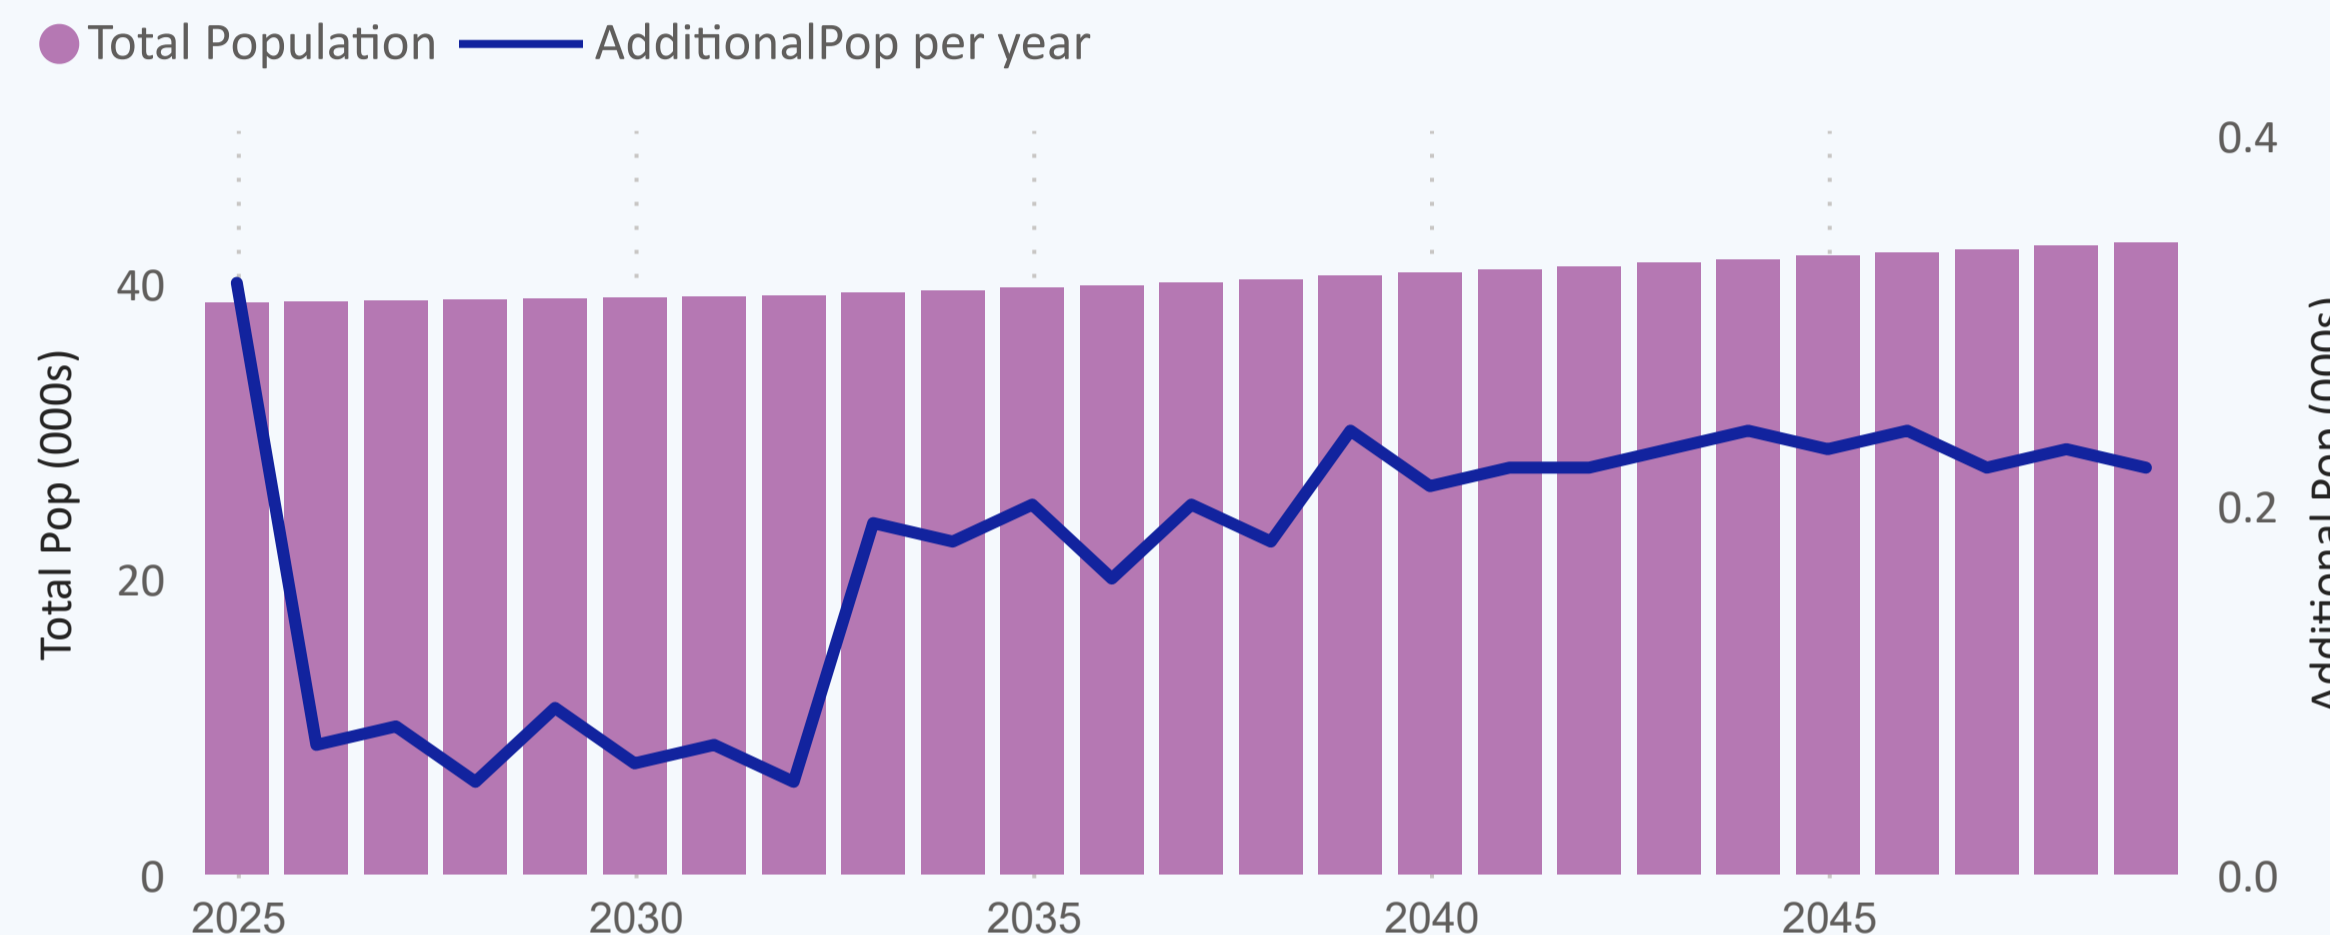



4.2 Over the WRMP period, property numbers in Essex Central are set to increase from 15910 in 2025 to 17950 in 2049-50 - this is an increase of 12.8 % over the 25 years.

Table 4b: Property totals (cumulative) by AMP

Year	Total Properties-excl voids (000s)
2029-30 (end of AMP8)	15.990
2034-35 (end of AMP9)	16.280
2039-40 (end of AMP10)	16.870
2044-45 (end of AMP11)	17.430
2049-50 (end of AMP12)	17.950

Figure 3: Total Resource Zone Properties (excl. voids)

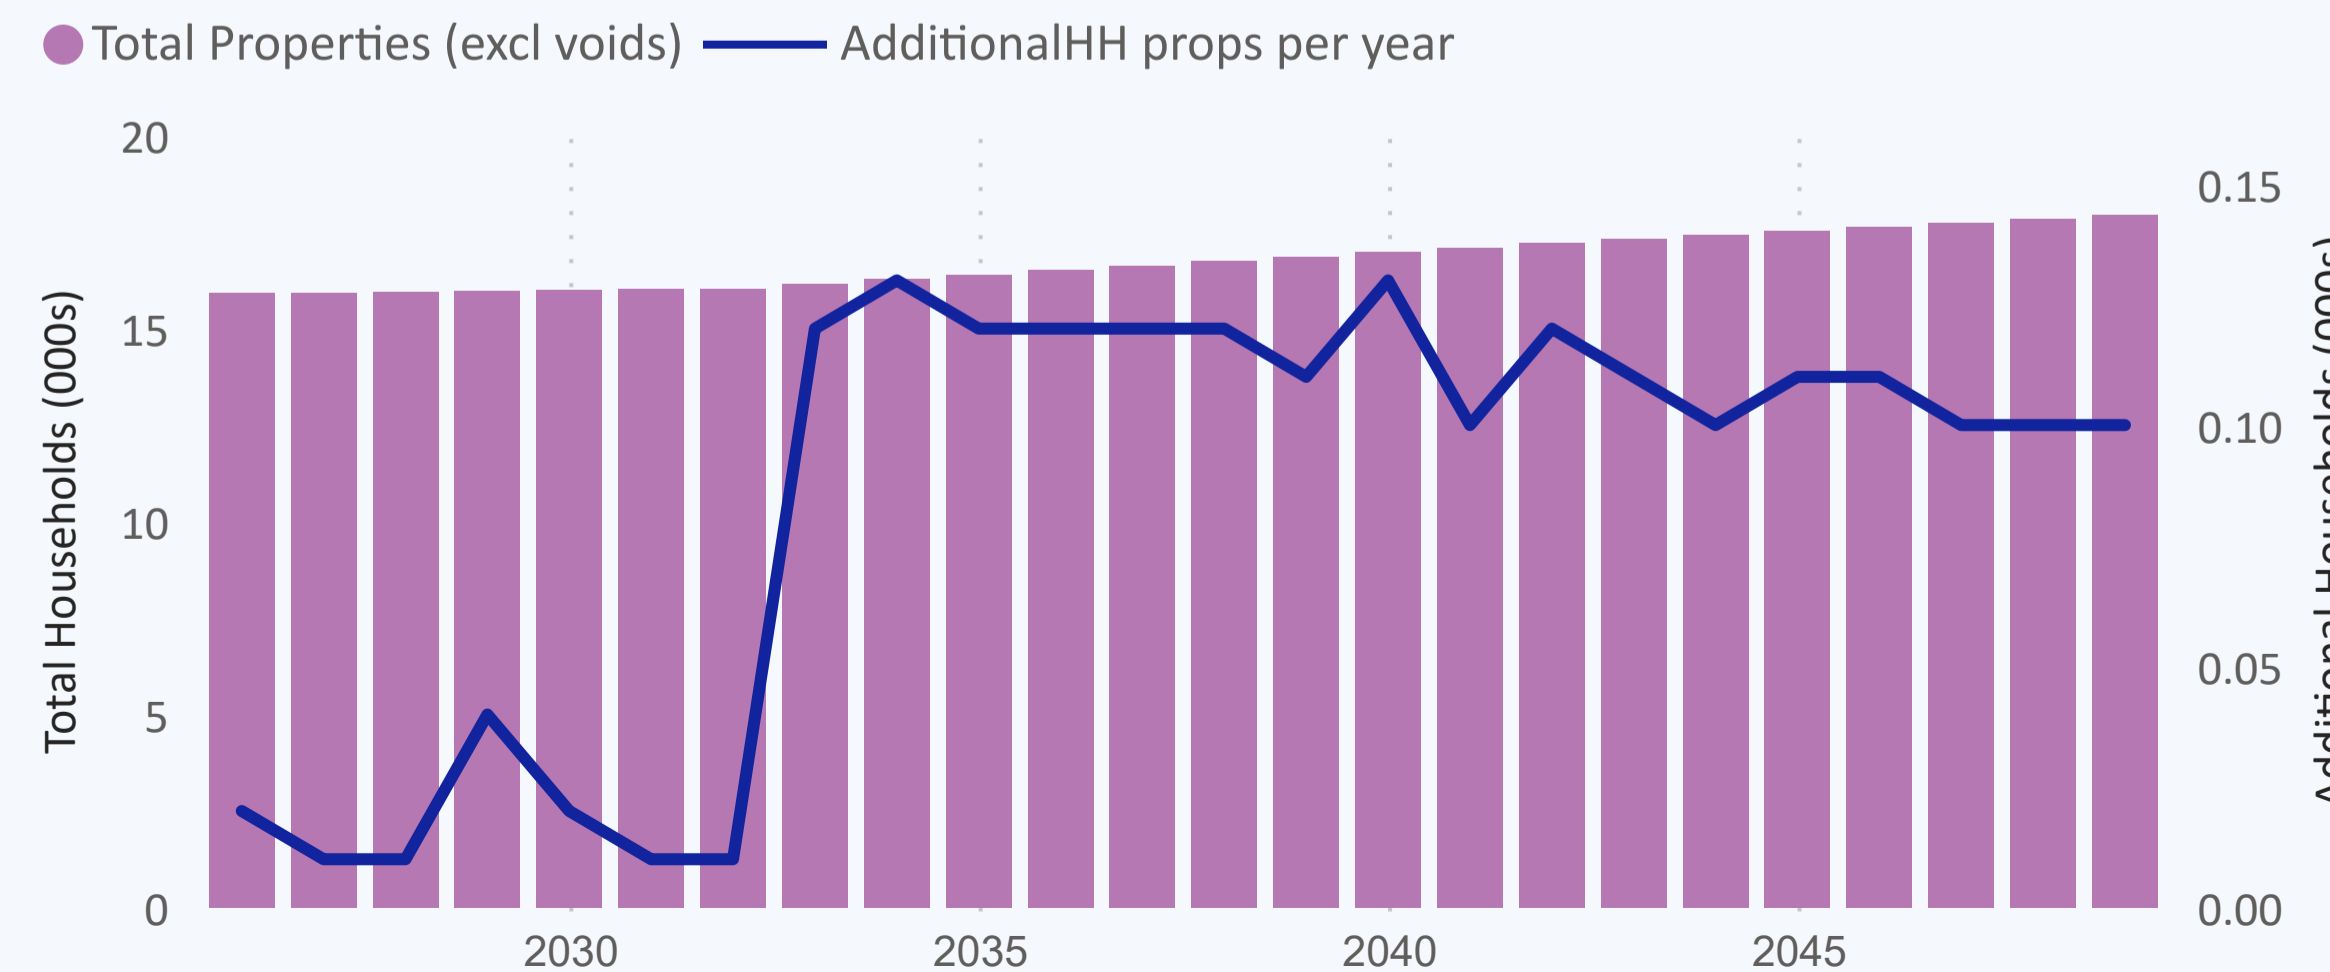

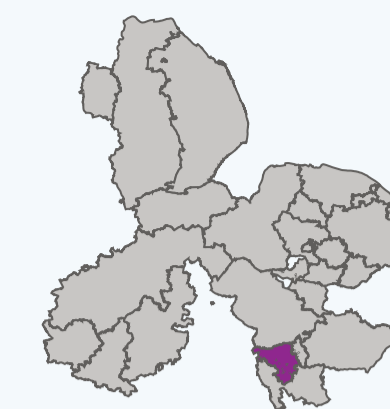

# 5. Baseline Supply Demand Balance DYAA

## Essex Central

Figure 4: Essex Central baseline supply demand balance to 2050 for Dry Year Annual Average conditions

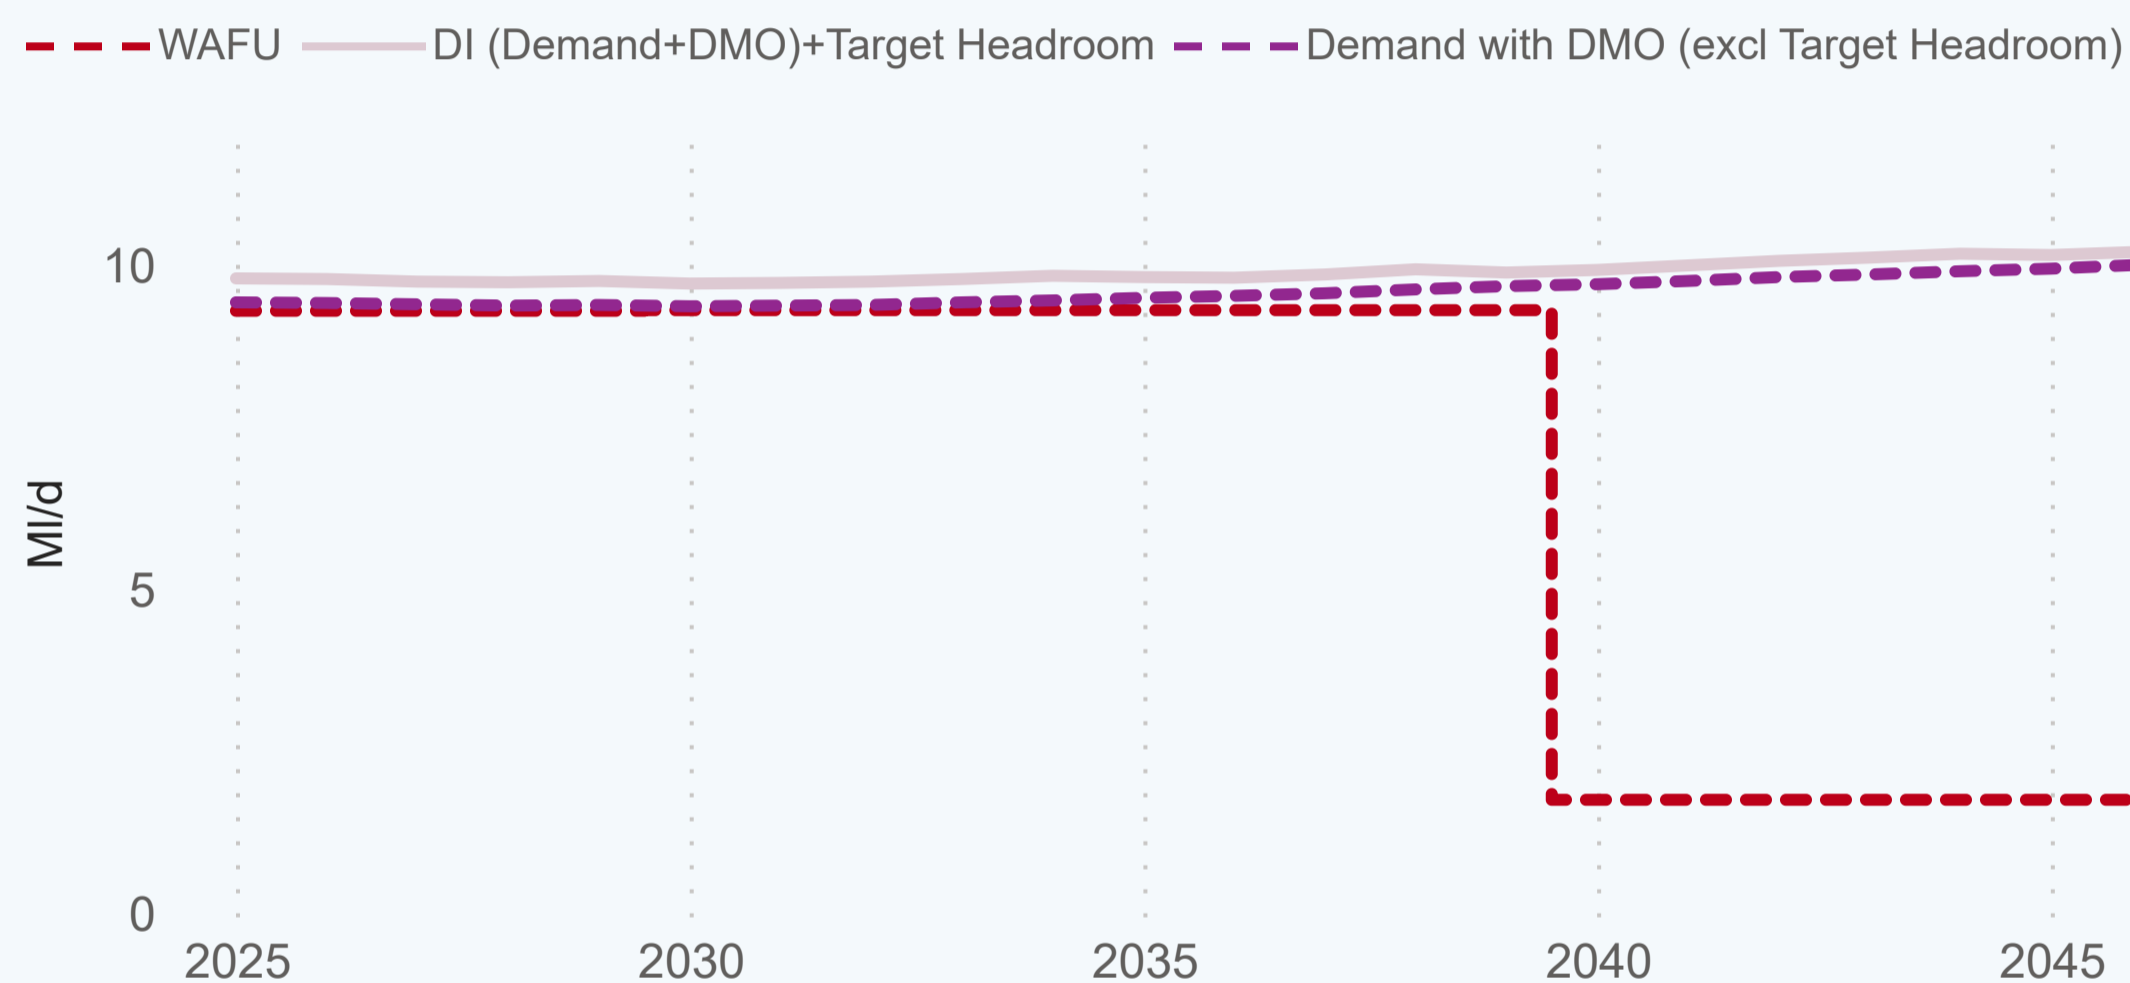


Table 5a: Baseline supply demand balance 2025 - 2050 for DYAA conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	8.6	8.6	8.6	8.6	1.1	1.1
Net Transfers	0.7	0.7	0.7	0.7	0.7	0.7
Total Water Available For Use	9.3	9.3	9.3	9.3	1.8	1.8
Distribution Input	9.4	9.4	9.5	9.7	9.9	10.2
Target Headroom	0.4	0.4	0.4	0.2	0.3	0.2
Supply Demand Balance	-0.5	-0.5	-0.5	-0.6	-8.4	-8.6

Table 5b: Baseline demand forecast (without preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	3.9	4.0	4.2	4.6	4.9	5.0
Water delivered unmeasured household	2.0	1.8	1.5	1.3	1.2	1.2
Total Leakage	2.6	2.5	2.5	2.5	2.5	2.5
Water delivered measured non-household	1.0	1.1	1.2	1.3	1.4	1.5
Water delivered unmeasured non-household	0.0	0.0	0.0	0.0	0.0	0.0
Distribution Input	9.4	9.4	9.5	9.7	9.9	10.2

### 5.1 DYAA BL supply demand summary: Essex Central

Baseline Supply Demand Balance: This zone will go into deficit immediately (under the preferred baseline scenario - as described in section 3.3).

- Demand Forecast: Baseline household demand (measured and unmeasured) is forecast to change from 5.9 MI/d in 2025 to 6.2 MI/d in 2050, a percentage change of 5.4 %.
- Baseline Leakage: is forecast to change from 2.6 MI/d in 2025 to 2.5 MI/d by 2050.
- Baseline Non-Household demand: is expected to change from 1.0 MI/d to 1.5 MI/d.
- Baseline Distribution Input: is expected to change from 9.4 MI/d to 10.2 MI/d by 2050.

Nb. 'Deficit' is one outcome of the calculation WAFU minus Distribution Input (including Target Headroom).



# 6. Baseline Supply Demand Balance DYCP

Essex Central

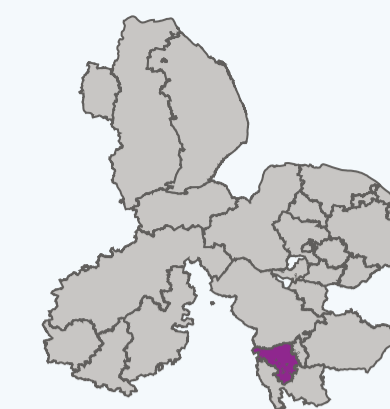


Figure 5: Essex Central baseline supply demand balance to 2050 for Dry Year Critical Period conditions

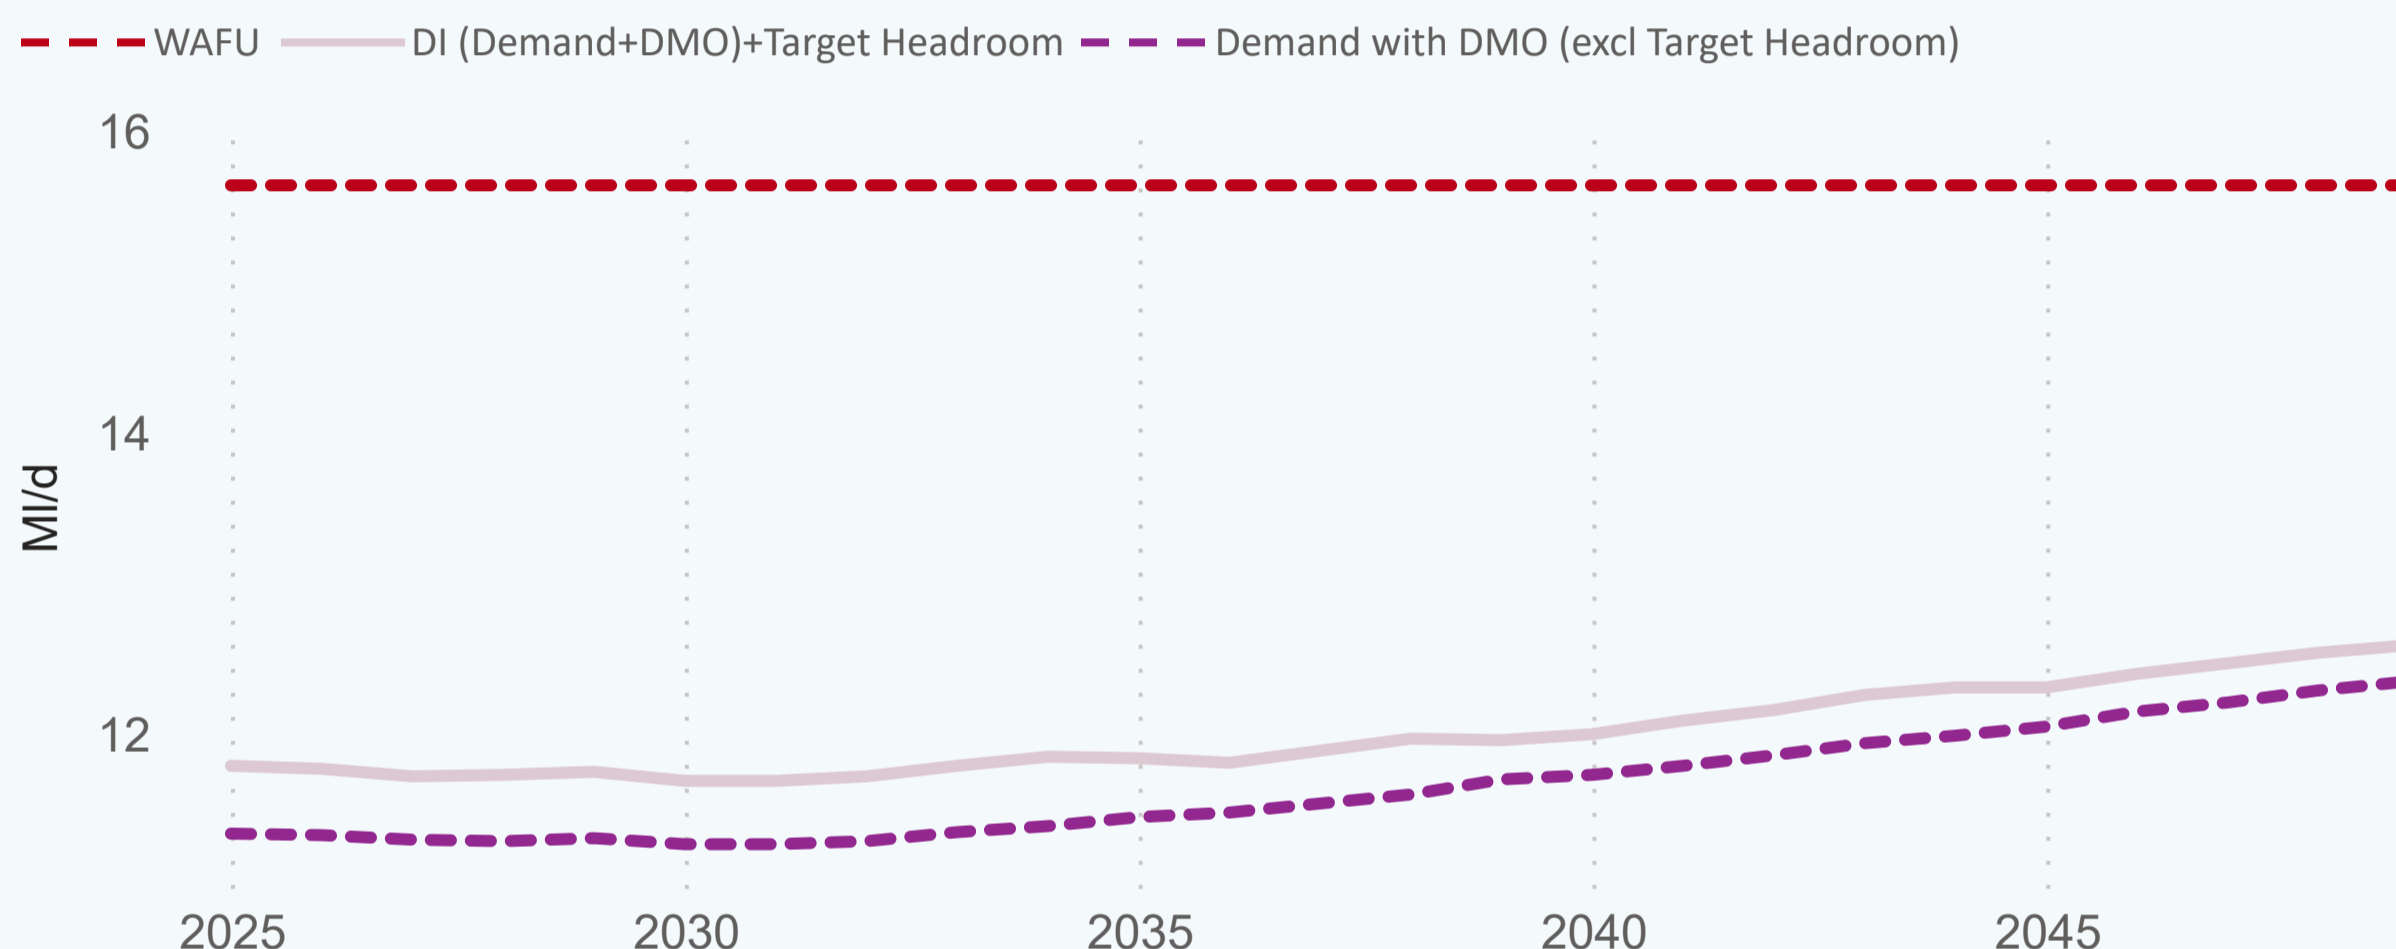


Table 6b: Baseline demand forecast with DYCP conditions (without preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	5.0	5.1	5.4	5.8	6.2	6.5
Water delivered unmeasured household	2.6	2.3	2.0	1.8	1.6	1.6
Total Leakage	2.6	2.5	2.5	2.5	2.5	2.5
Water delivered measured non-household	1.3	1.4	1.5	1.6	1.7	1.8
Water delivered unmeasured non-household	0.0	0.0	0.0	0.0	0.0	0.0
Distribution Input	11.3	11.3	11.4	11.7	12.0	12.4

Table 6a: Baseline supply demand balance 2025 - 2050 for DYCP conditions


	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	15.6	15.6	15.6	15.6	15.6	15.6
Net Transfers	0.0	0.0	0.0	0.0	0.0	0.0
Total Water Available For Use	15.6	15.6	15.6	15.6	15.6	15.6
Distribution Input	11.3	11.3	11.4	11.7	12.0	12.4
Target Headroom	0.5	0.4	0.5	0.3	0.3	0.2
Supply Demand Balance	3.9	3.9	3.8	3.7	3.3	3.1

## 6.1 DYCP BL supply demand summary: Essex Central

Baseline Supply Demand balance: This zone is not expected to go into deficit

- Demand Forecast: Baseline household demand (measured and unmeasured) is forecast to change from 7.6 MI/d in 2025 to 8.1 MI/d in 2050, a percentage change of 6.6 %.
- Baseline Leakage: is forecast to change from 2.6 MI/d in 2025 to 2.5 MI/d by 2050.
- Baseline Non-Household demand: is expected to change from 1.3 MI/d to 1.8 MI/d.
- Baseline Distribution Input: is expected to change from 11.3 MI/d to 12.4 MI/d by 2050.

Nb. 'Deficit' is one outcome of the calculation WAFU minus Distribution Input (including Target Headroom).

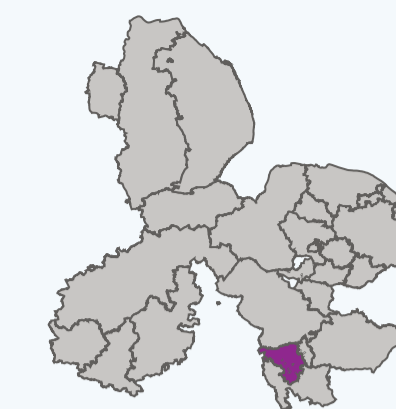

# 7. Demand forecast and PCC

## Essex Central

Figure 6: Essex Central DYAA DI with and without demand management strategy

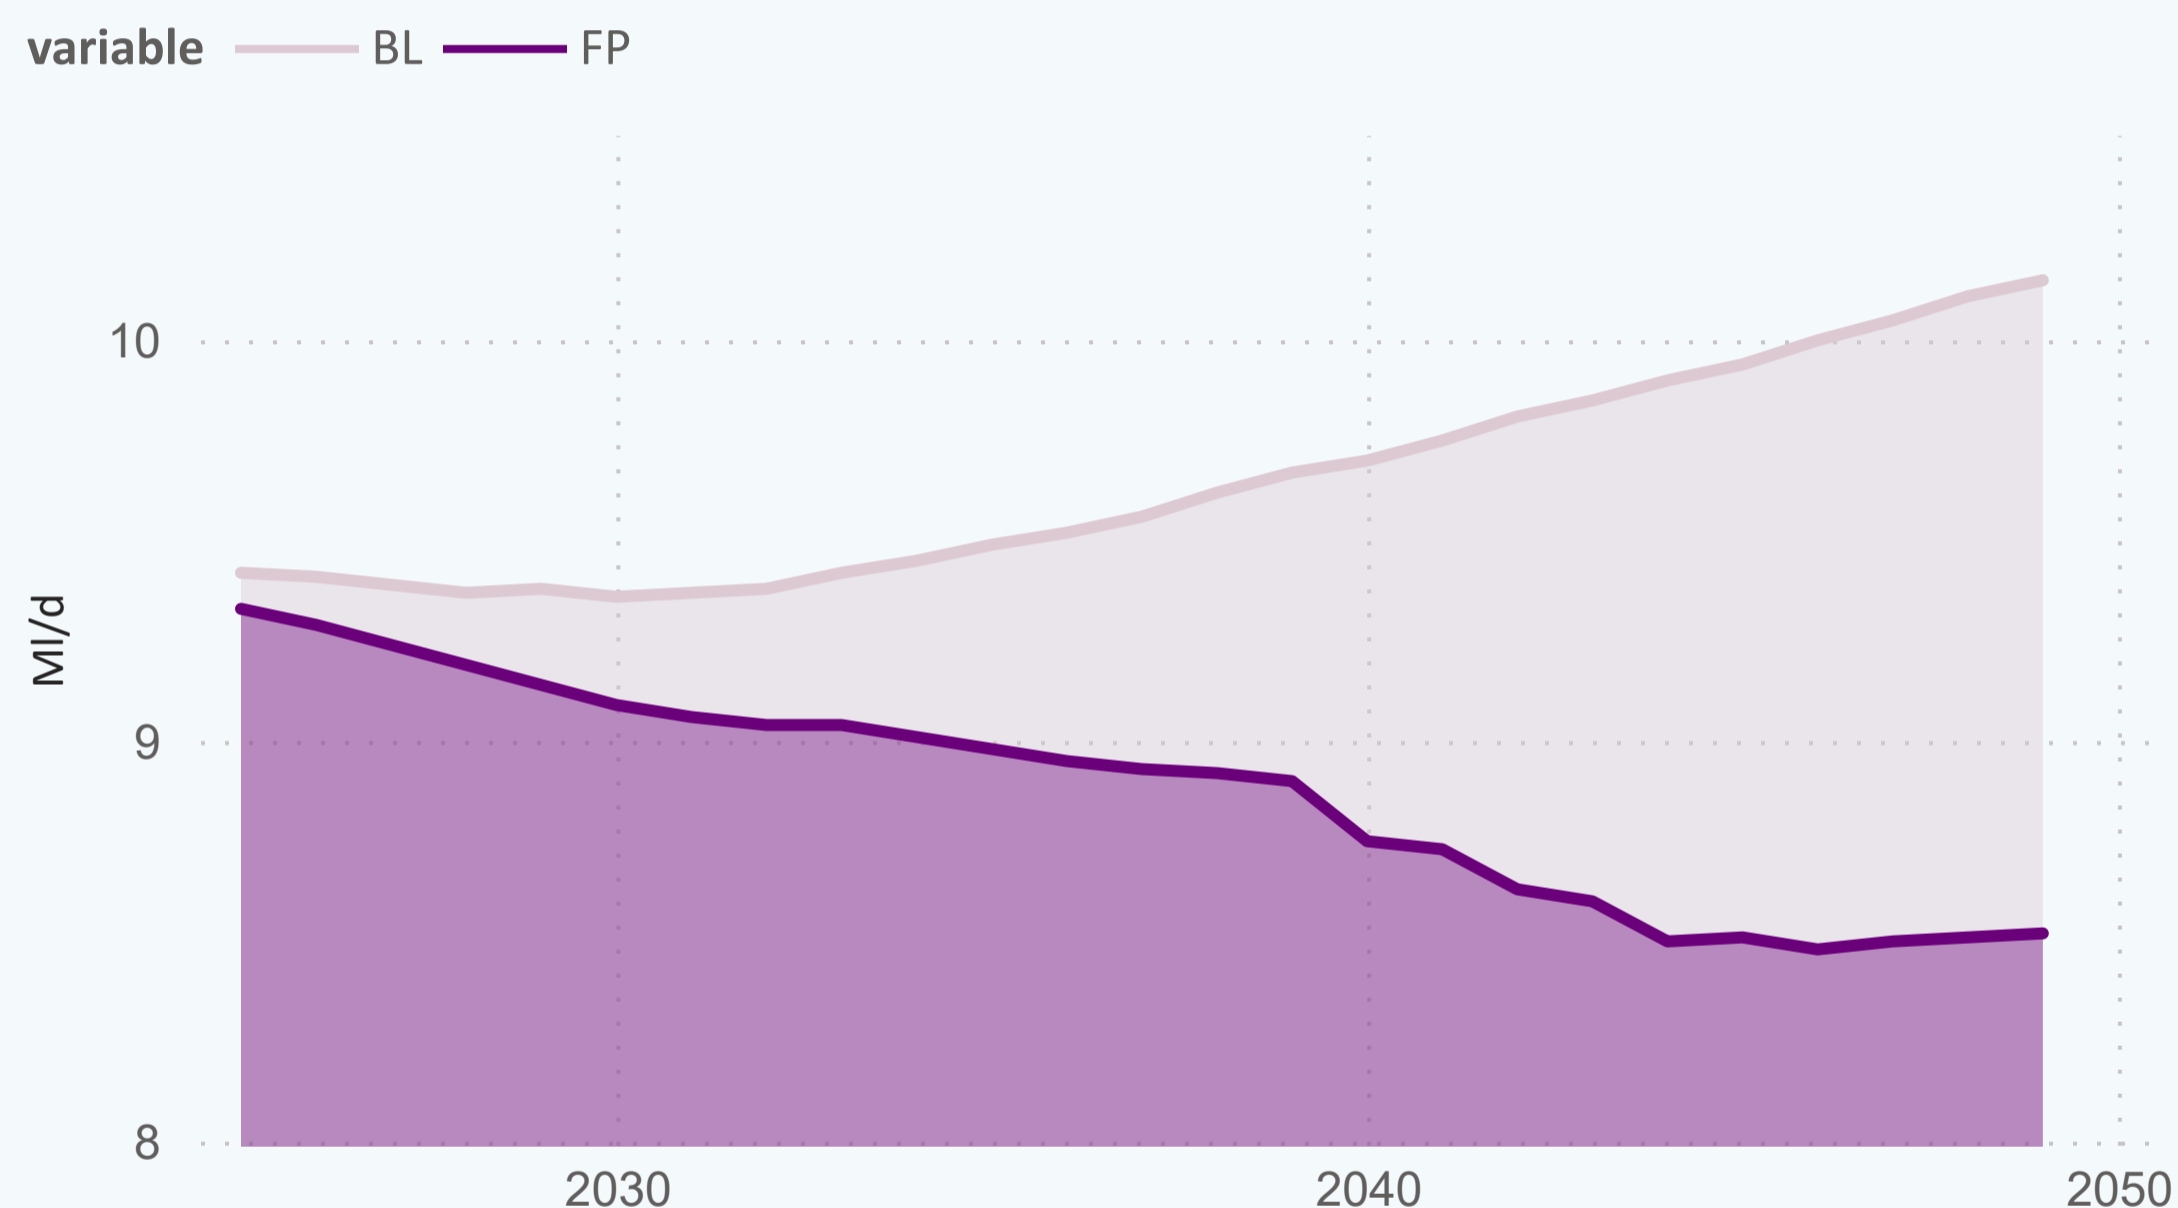


Table 7a: Demand - baseline and final plan

variable	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
BL	9.4	9.5	9.7	9.9	10.2
FP	9.1	9.0	8.9	8.5	8.5

### 7.2 Demand Essex Central (see Table 7a)

Baseline demand is expected to increase from 9.4 (MI/d) in 2025 to 10.2 (MI/d) in 2050. With demand management options in place, demand is expected to be 8.5 (MI/d).

### 7.1 PCC Essex Central (see Table 7b)

Per Capita Consumption (PCC) in the base year 2025/26 is 122.7 (l/h/d) measured and 234.4 (l/h/d) unmeasured.

The weighted average PCC (l/h/d) comes in at 145.4 (l/h/d) in 2025/26. This is forecast to fall to 121.7 (l/h/d) in the Final Plan forecast as demand management option savings are realised and customers switch from unmeasured to measured status

Table 7b: DMO strategy Final Plan


	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
BL demand forecast(DYAA)	141.8	140.3	140.4	139.7	139.9
FP demand forecast(DYAA)	139.4	134.7	129.0	123.4	121.7
% change BL to FP	-1.7%	-4.0%	-8.1%	-11.7%	-13.0%



# 8. Demand management options



## Essex Central

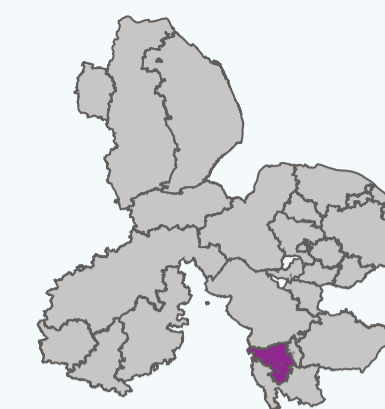

### 8.1 Regional overview:

Across the entirety of the Anglian Water region our demand management strategy will comprise three strongly interlinked programs:

#### Water metering program:

- We intend to complete our current smart meter rollout which will replace our entire meter stock over 10 years (2 AMPs), noting that 1.1M smart meters will be installed across Anglian Water by 2025. The information resulting from 'smart metering' will help inform our customers regarding their water usage and will assist in our ability to influence this behaviour. It will also help with our ability to detect leakage, significantly reducing plumbing losses and customer supply pipe leaks.

#### Leakage reduction

- Our aim is to reduce leakage by more than 45MI/d from 2025 to 2050 across the whole Anglian Water area, building upon our ambitious program of leakage reduction in AMP7 (14% reduction of more than 27MI/d across the region by 2025).

#### Water efficiency measures


- New technologies and interventions will help promote the careful use of water. Additional water efficiency programs will include: the promotion of 'Smart' devices; further development of our Multi-utility web-portal; garden advice; support for vulnerable customers with plumbing loss and cspl; Community reward schemes. As part of our revised draft WRMP24 we have developed and included 'water efficiency visits' and leakage reduction measures for our Non-Household customers.


Table 8: DMO strategy Final Plan for Essex Central

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
14.1-Change volume delivered to measured households( -ve)	-0.1	-0.3	-0.5	-0.7	-0.8
15.1-Change volume delivered to unmeasured households( -ve)	0.0	0.0	0.0	0.0	0.0
25.1-Options impacting on measured Household - USPL ( -ve)	-0.1	-0.1	-0.1	-0.1	-0.1
26.1-Options impacting on unmeasured Household - USPL (-ve)	0.0	0.0	0.0	0.0	0.0
27.1-Options impacting on Void properties - USPL (-ve)	0.0	0.0	0.0	0.0	0.0
28.1-Reduce distribution losses (-ve)	0.0	0.0	0.0	-0.4	-0.4

Figure 7: DMO strategy Final Plan for Essex Central

For full chart key see table below

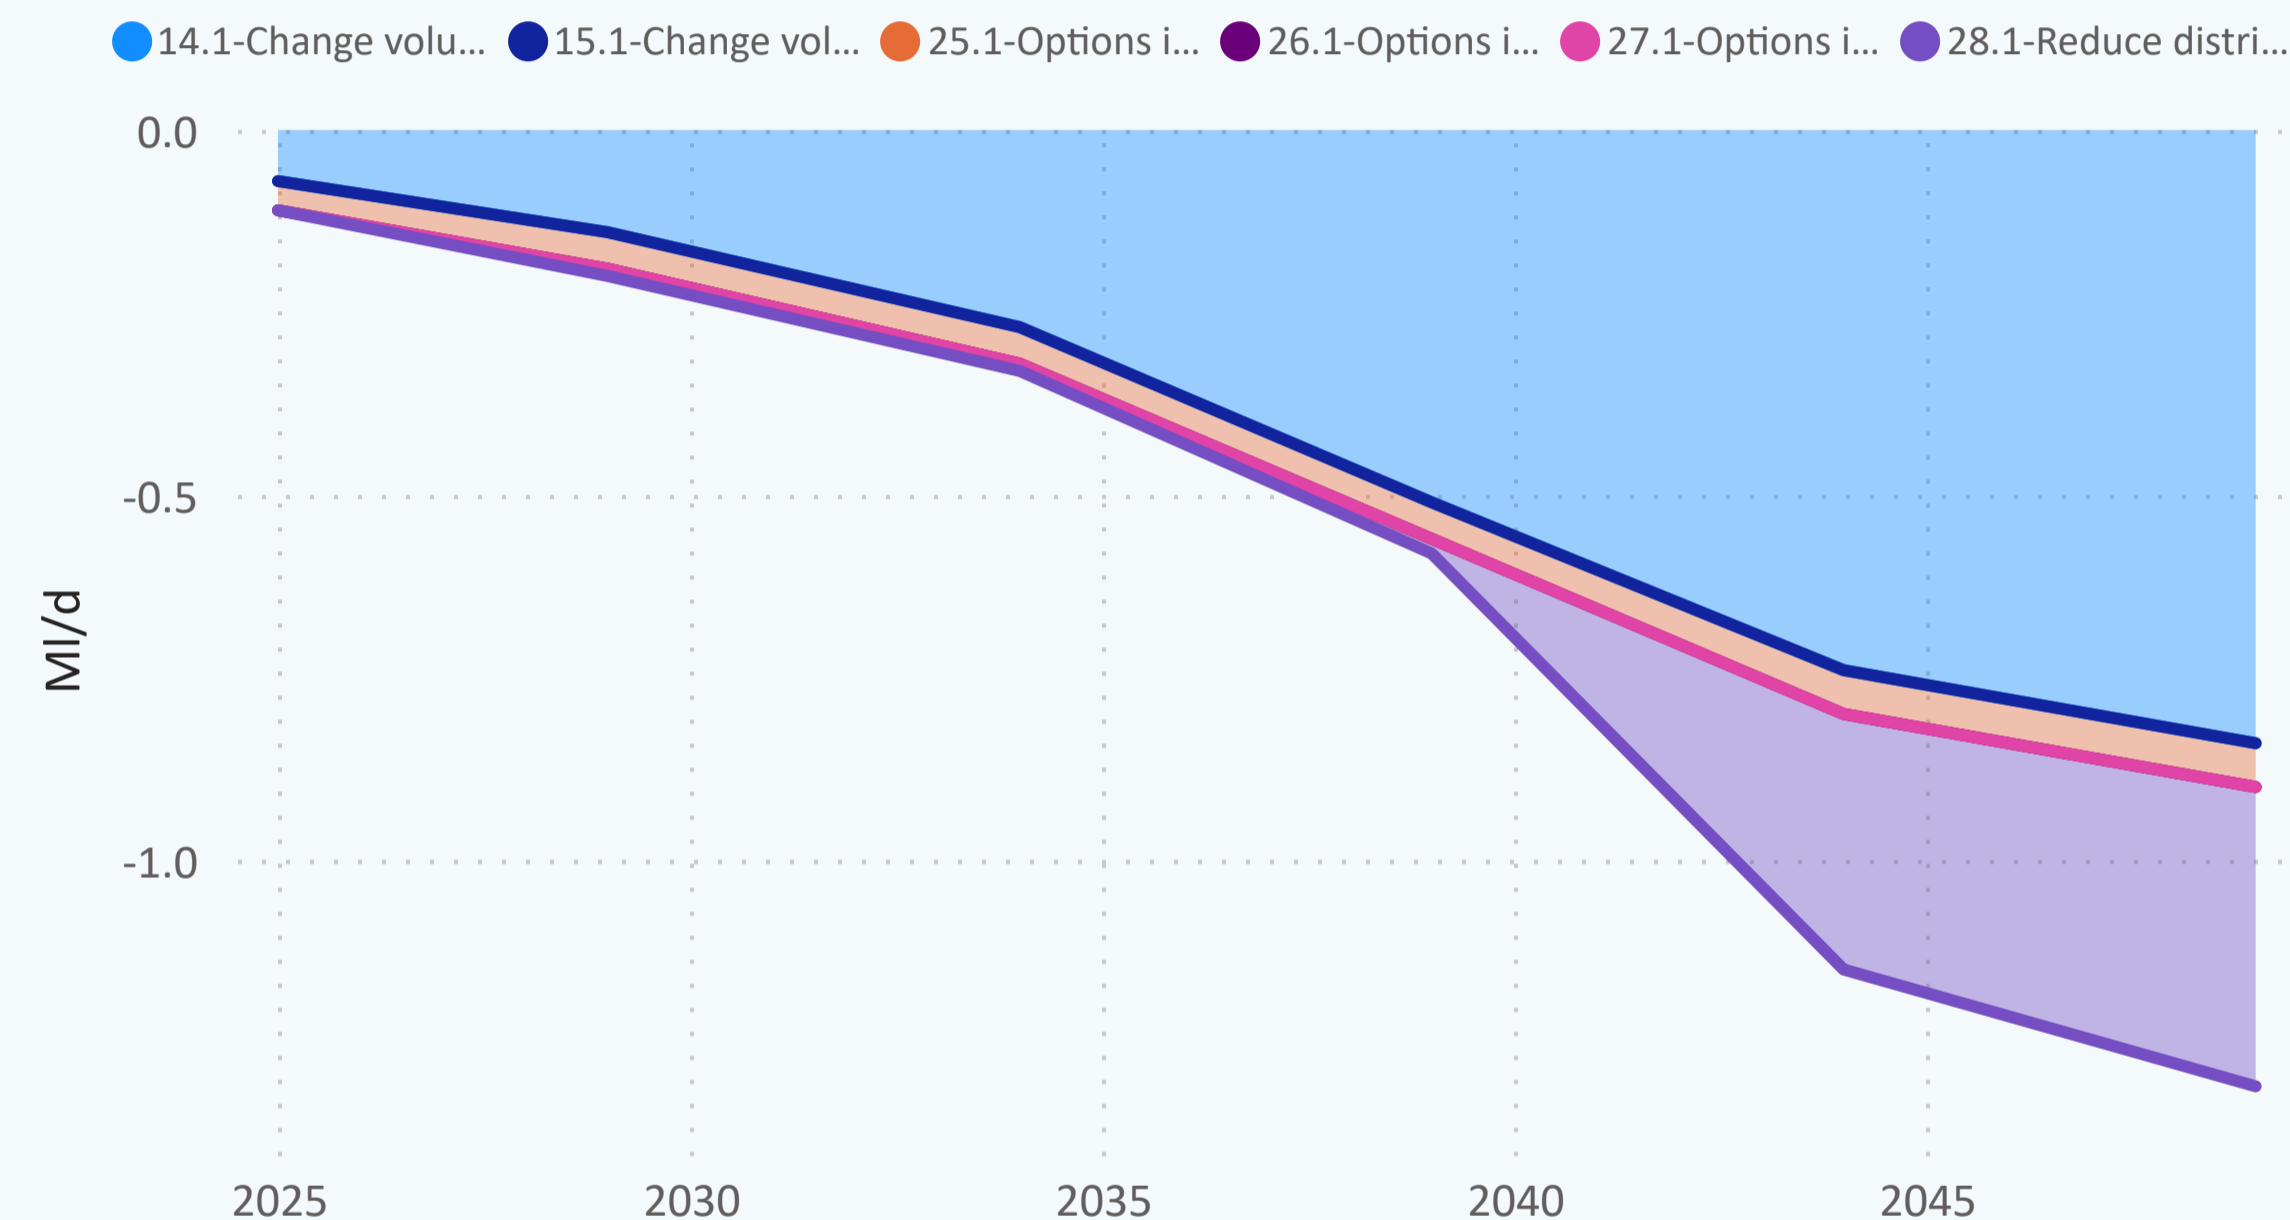

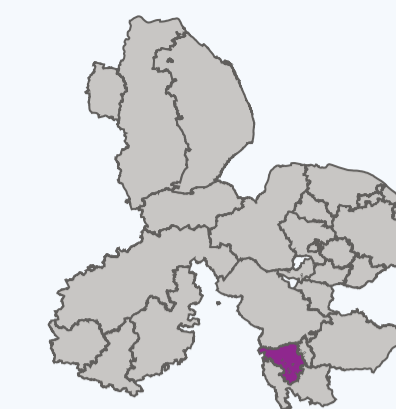

# 9. Final Plan Supply Demand Balance DYAA

Essex Central

Figure 8: Essex Central final plan SDB to 2050 for Dry Year Annual Average conditions

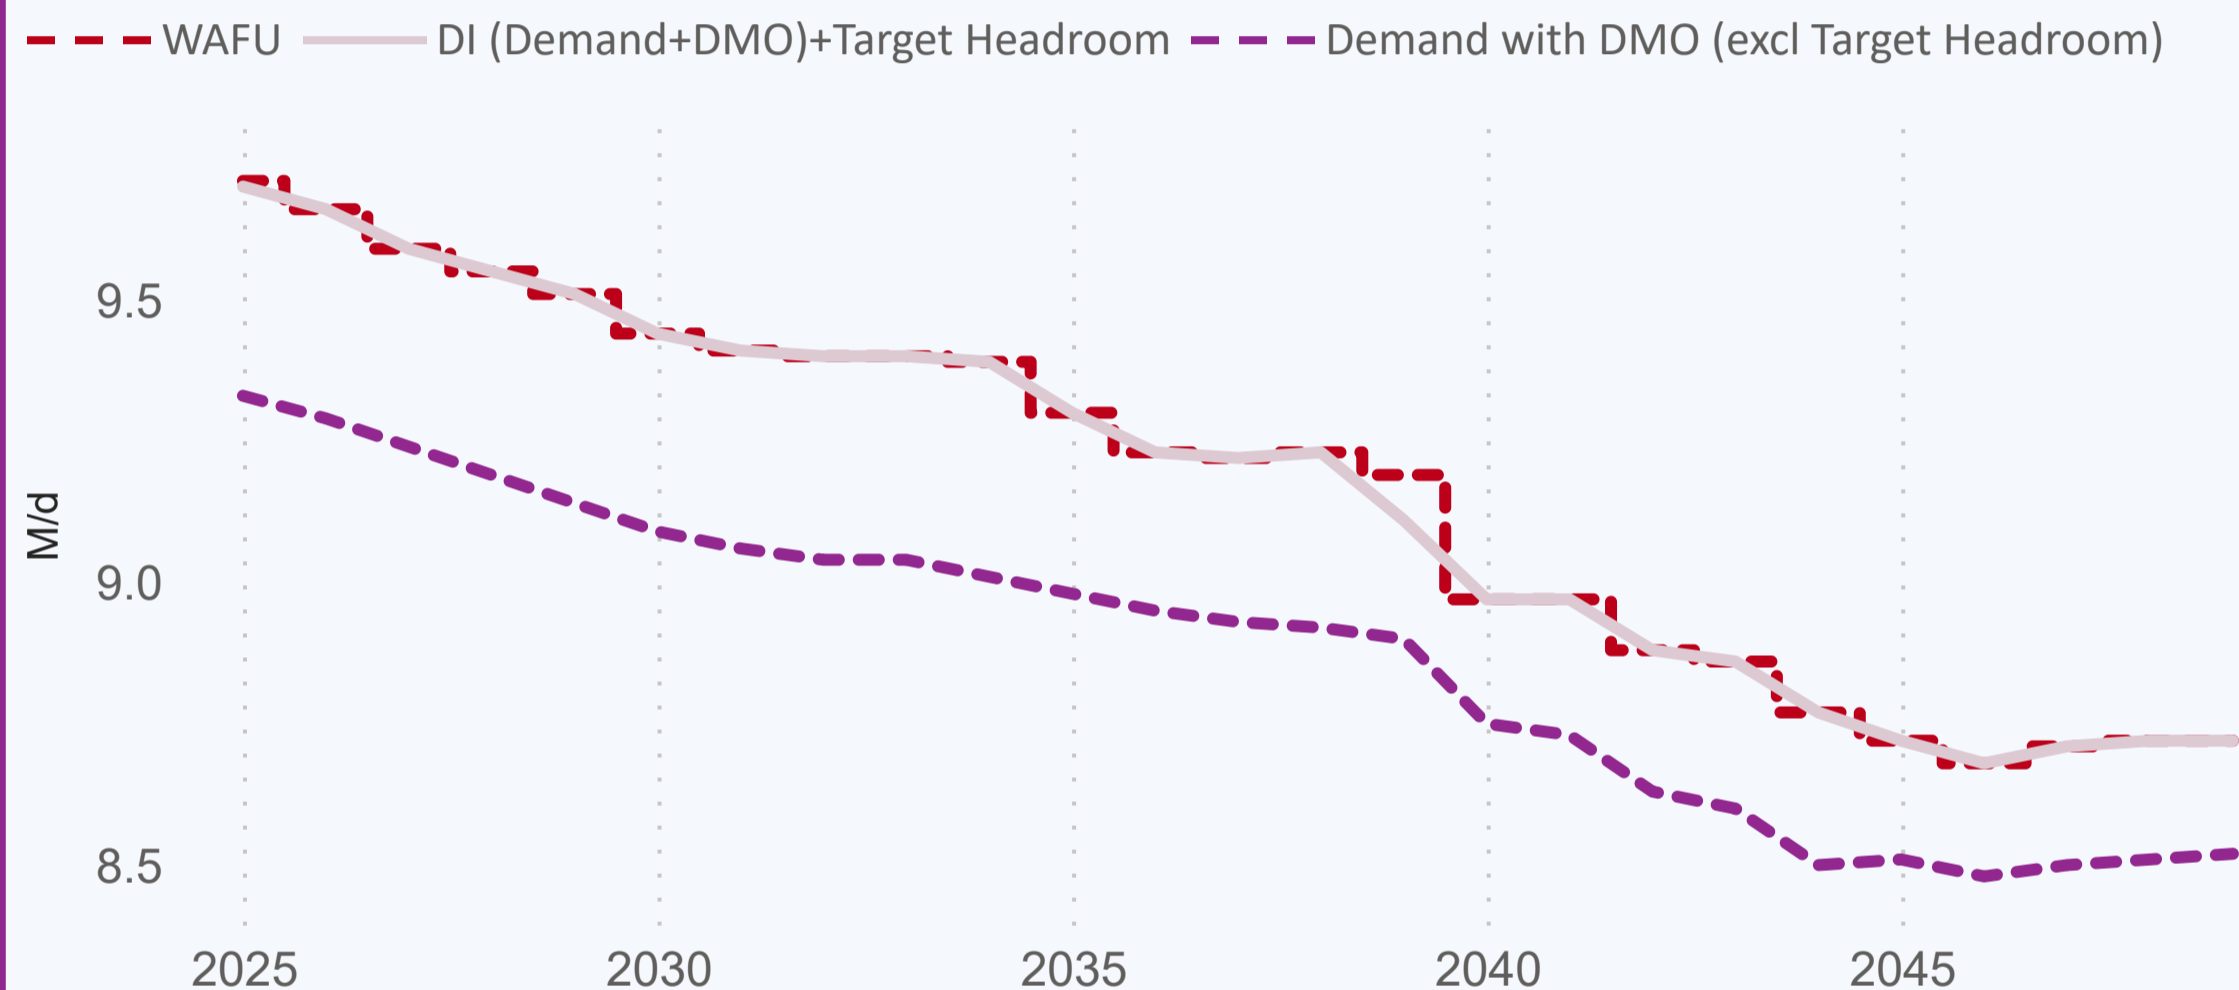


Table 9a: final plan SDB to 2050 for Dry Year conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	9.6	9.5	8.9	8.9	1.4	1.4
Net Transfers	0.2	0.0	0.5	0.3	7.4	7.4
Total Water Available For Use	9.7	9.5	9.4	9.2	8.8	8.7
Distribution Input	9.3	9.1	9.0	8.9	8.5	8.5
Target Headroom	0.4	0.4	0.4	0.2	0.3	0.2
Supply Demand Balance	0.0	0.0	0.0	0.1	0.0	0.0


Table 9b: Final Plan demand forecast for DYAA conditions (with preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	3.9	3.9	4.0	4.1	4.1	4.2
Water delivered unmeasured household	2.0	1.8	1.5	1.3	1.2	1.2
Total Leakage	2.5	2.5	2.5	2.4	2.1	2.1
Water delivered measured non-household	1.0	1.0	1.0	1.0	1.1	1.1
Water delivered unmeasured non-household	0.0	0.0	0.0	0.0	0.0	0.0
Distribution Input	9.3	9.1	9.0	8.9	8.5	8.5

## 9.1 DYAA FP supply demand summary: Essex Central

The zone is in balance.

- Demand Forecast: Final Plan household demand (measured and unmeasured) is forecast to change from 5.8 MI/d in 2025 to 5.4 MI/d in 2050, a percentage change of -7.7 %.
- Final Plan Leakage is forecast to change from 2.5 MI/d in 2025 to 2.1 MI/d by 2050.
- Final Plan Non-Household demand is expected to change from 1.0 MI/d to 1.1 MI/d.
- Final Plan Distribution Input is expected to change from 9.3 MI/d to 8.5 MI/d by 2050.

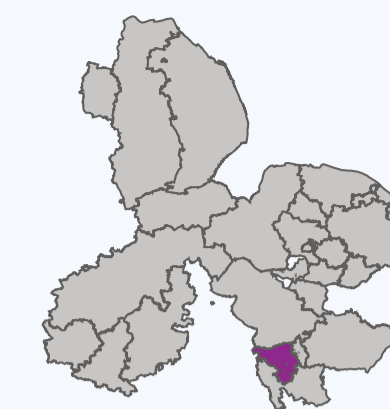

# 10. Final Plan Supply Demand Balance DYCP

Essex Central

Figure 9: Essex Central baseline supply demand balance to 2050 for Dry Year Critical Period conditions

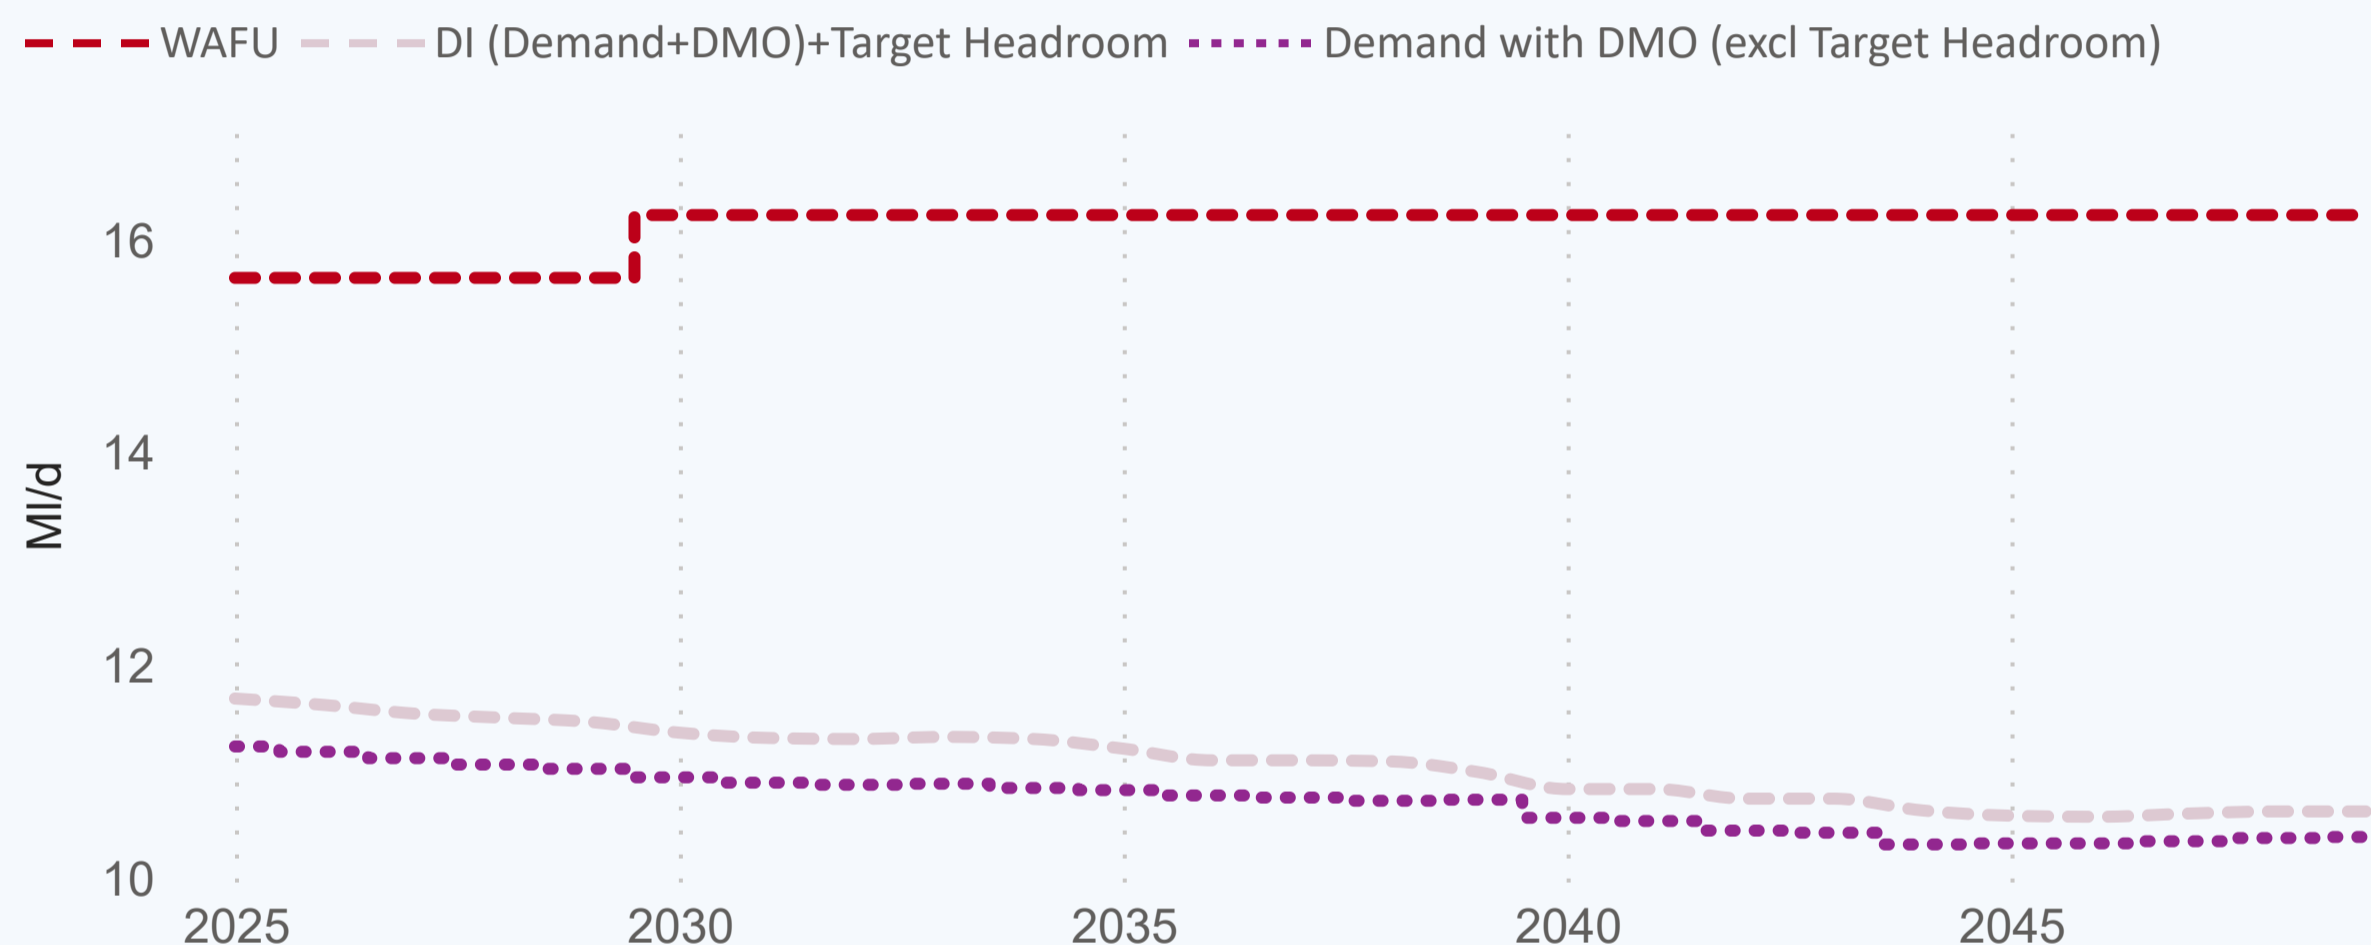


Table 10b: Final Plan demand forecast for DYCP conditions (with preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	4.9	5.0	5.1	5.2	5.3	5.4
Water delivered unmeasured household	2.6	2.3	2.0	1.8	1.6	1.6
Total Leakage	2.5	2.5	2.5	2.4	2.1	2.1
Water delivered measured non-household	1.3	1.3	1.3	1.3	1.3	1.3
Water delivered unmeasured non-household	0.0	0.0	0.0	0.0	0.0	0.0
Distribution Input	11.2	11.0	10.9	10.7	10.3	10.4

Table 10a: Final Plan supply demand balance 2025 - 2050 for DYCP conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	15.6	15.6	15.9	15.9	15.9	15.9
Net Transfers	0.0	0.0	0.3	0.3	0.3	0.3
Total Water Available For Use	15.6	15.6	16.2	16.2	16.2	16.2
Distribution Input	11.2	11.0	10.9	10.7	10.3	10.4
Target Headroom	0.5	0.4	0.5	0.3	0.3	0.2
Supply Demand Balance	4.0	4.2	4.9	5.2	5.6	5.6


## 10.1 DYCP BL supply demand summary: Essex Central

The zone is in balance.

- Demand Forecast: Final Plan household demand (measured and unmeasured) is forecast to change from 7.5 MI/d in 2025 to 7.0 MI/d in 2050, a percentage change of -6.7 %.
- Final Plan Leakage: is forecast to change from 2.5 MI/d in 2025 to 2.1 MI/d by 2050
- Final Plan Non-Household demand: is expected to change from 1.3 MI/d to 1.3 MI/d.
- Final Plan Distribution Input: is expected to change from 11.2 MI/d to 10.4 MI/d by 2050.



# 11. Supply Side Strategy

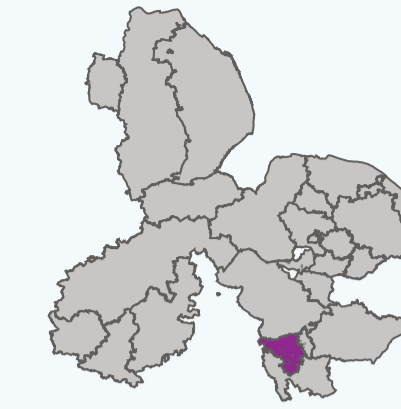

## Essex Central


**Table 11a: Total Water Available for use Baseline and Final Plan**

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
WAFU - BL	13.2	9.3	9.3	1.8	1.8
WAFU - FP	9.5	9.4	9.2	8.8	8.7

### 11.1 Supply side strategy options.

For details on the feasible options list for Essex Central WRZ please refer to the Supply-Side Option Development technical supporting document.

**Figure 10 Water Available for Use (WAFU) - baseline (BL) and final plan (FP)**

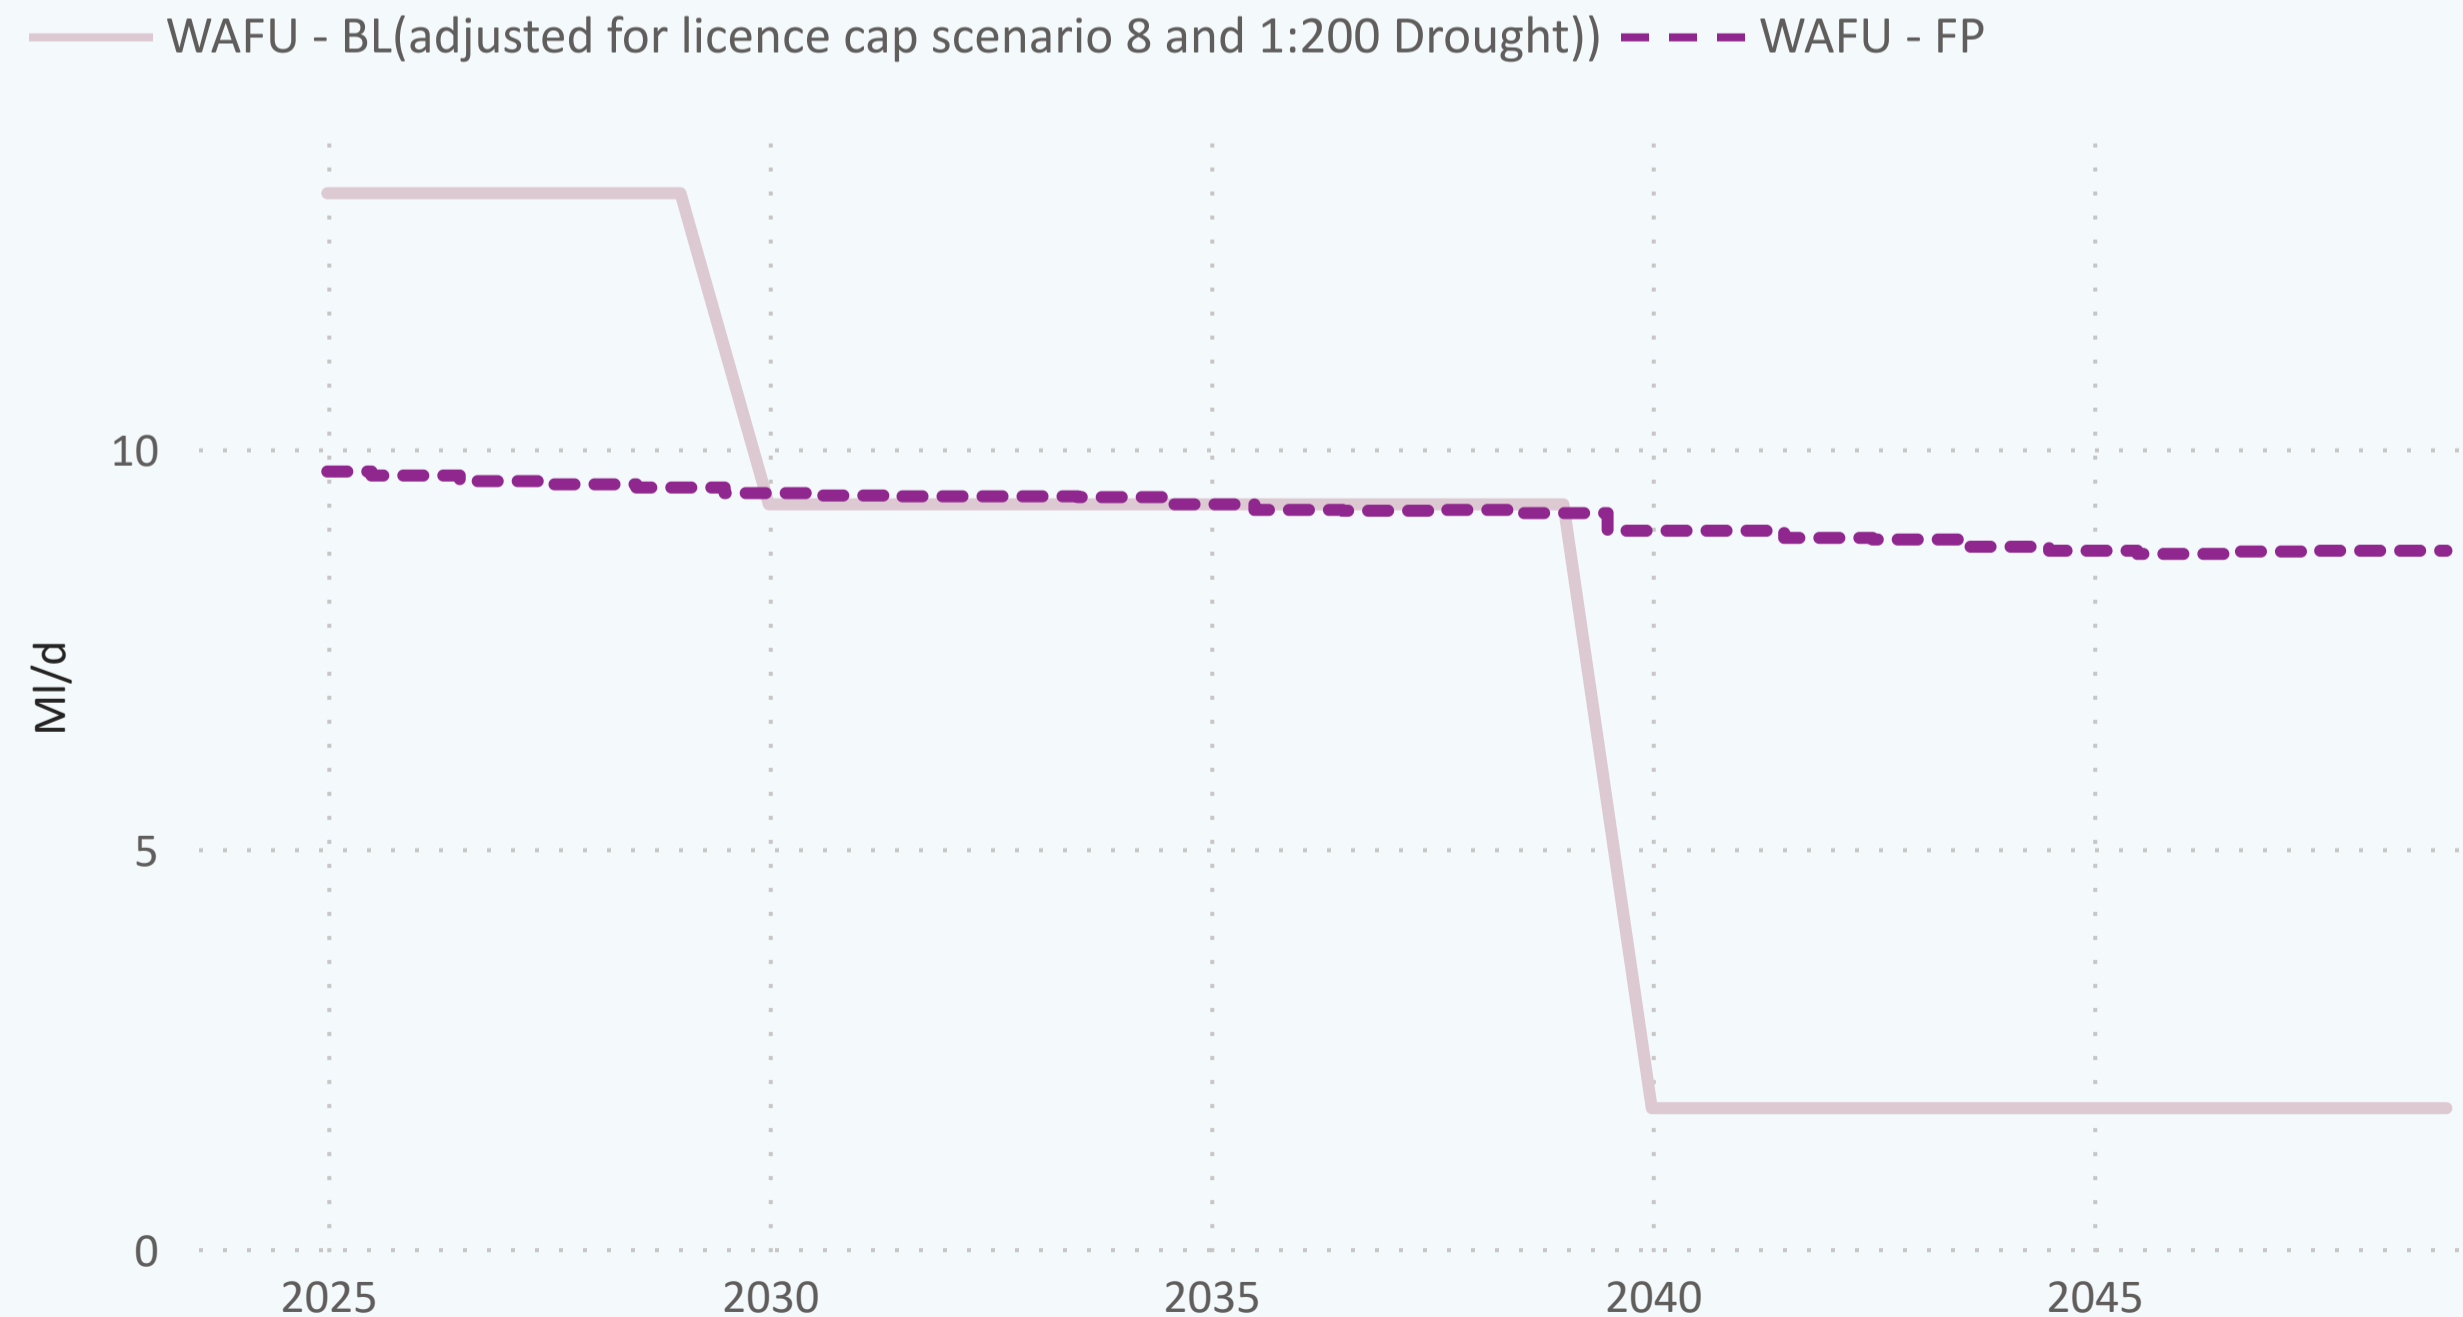


**Table 11b: Preferred supply side options**

Option ID	First Option Name
EI01	Adjustment to existing potable water import
EXC3	Essex South to Essex Central potable transfer (10 MI/d)
EXC7	Essex Central WTW backwash water recovery
LC02	Adjustment for Licence cap scenario 8
OPI1	AMP8 OPI Adjustment



# 12. Non-Household consumption

## Essex Central


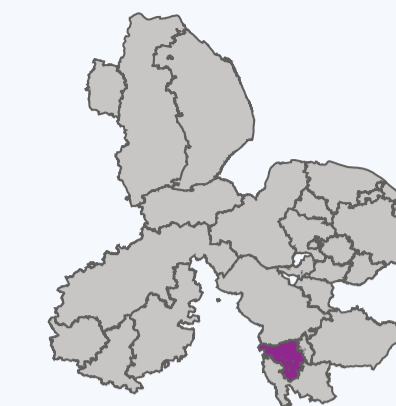


### 12.1 Non-Household demand Essex Central

In 2025, 1.0 MI/d of Non-Household demand (measured and unmeasured) is expected. In 2049 it is expected to be 1.1 MI/d, which is a 5.94% change between the years.

Figure 12: % Non-Household modelled sectors within resource zone

Figure 11: Non-Household demand forecast 2025-2050

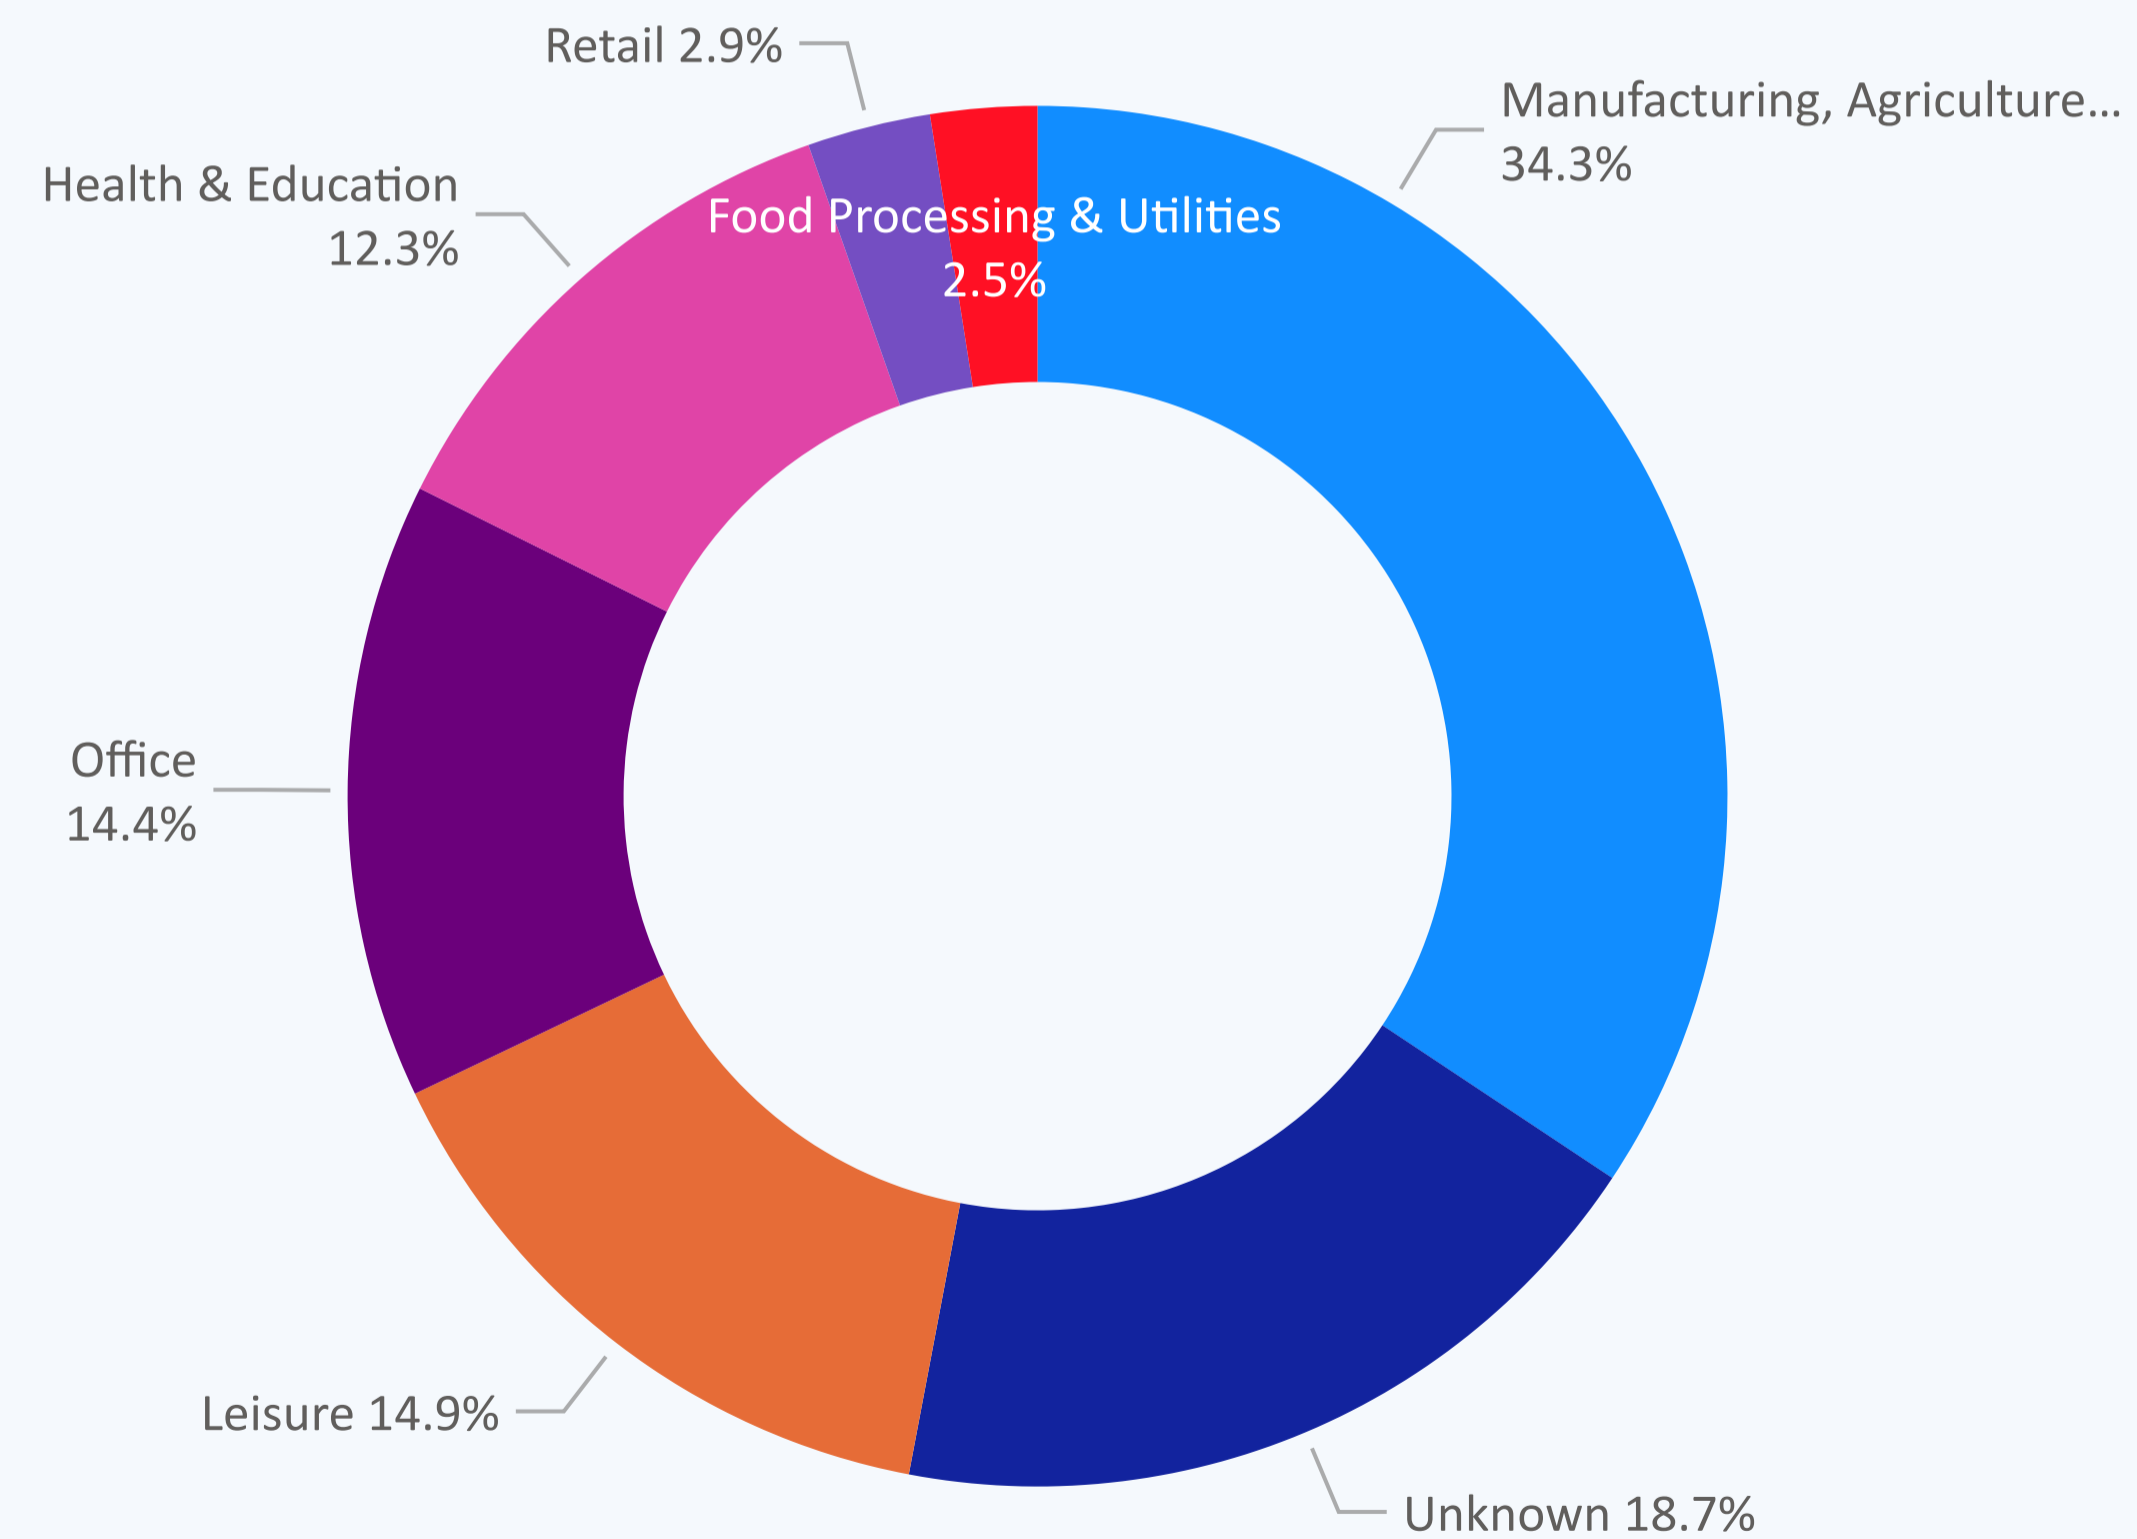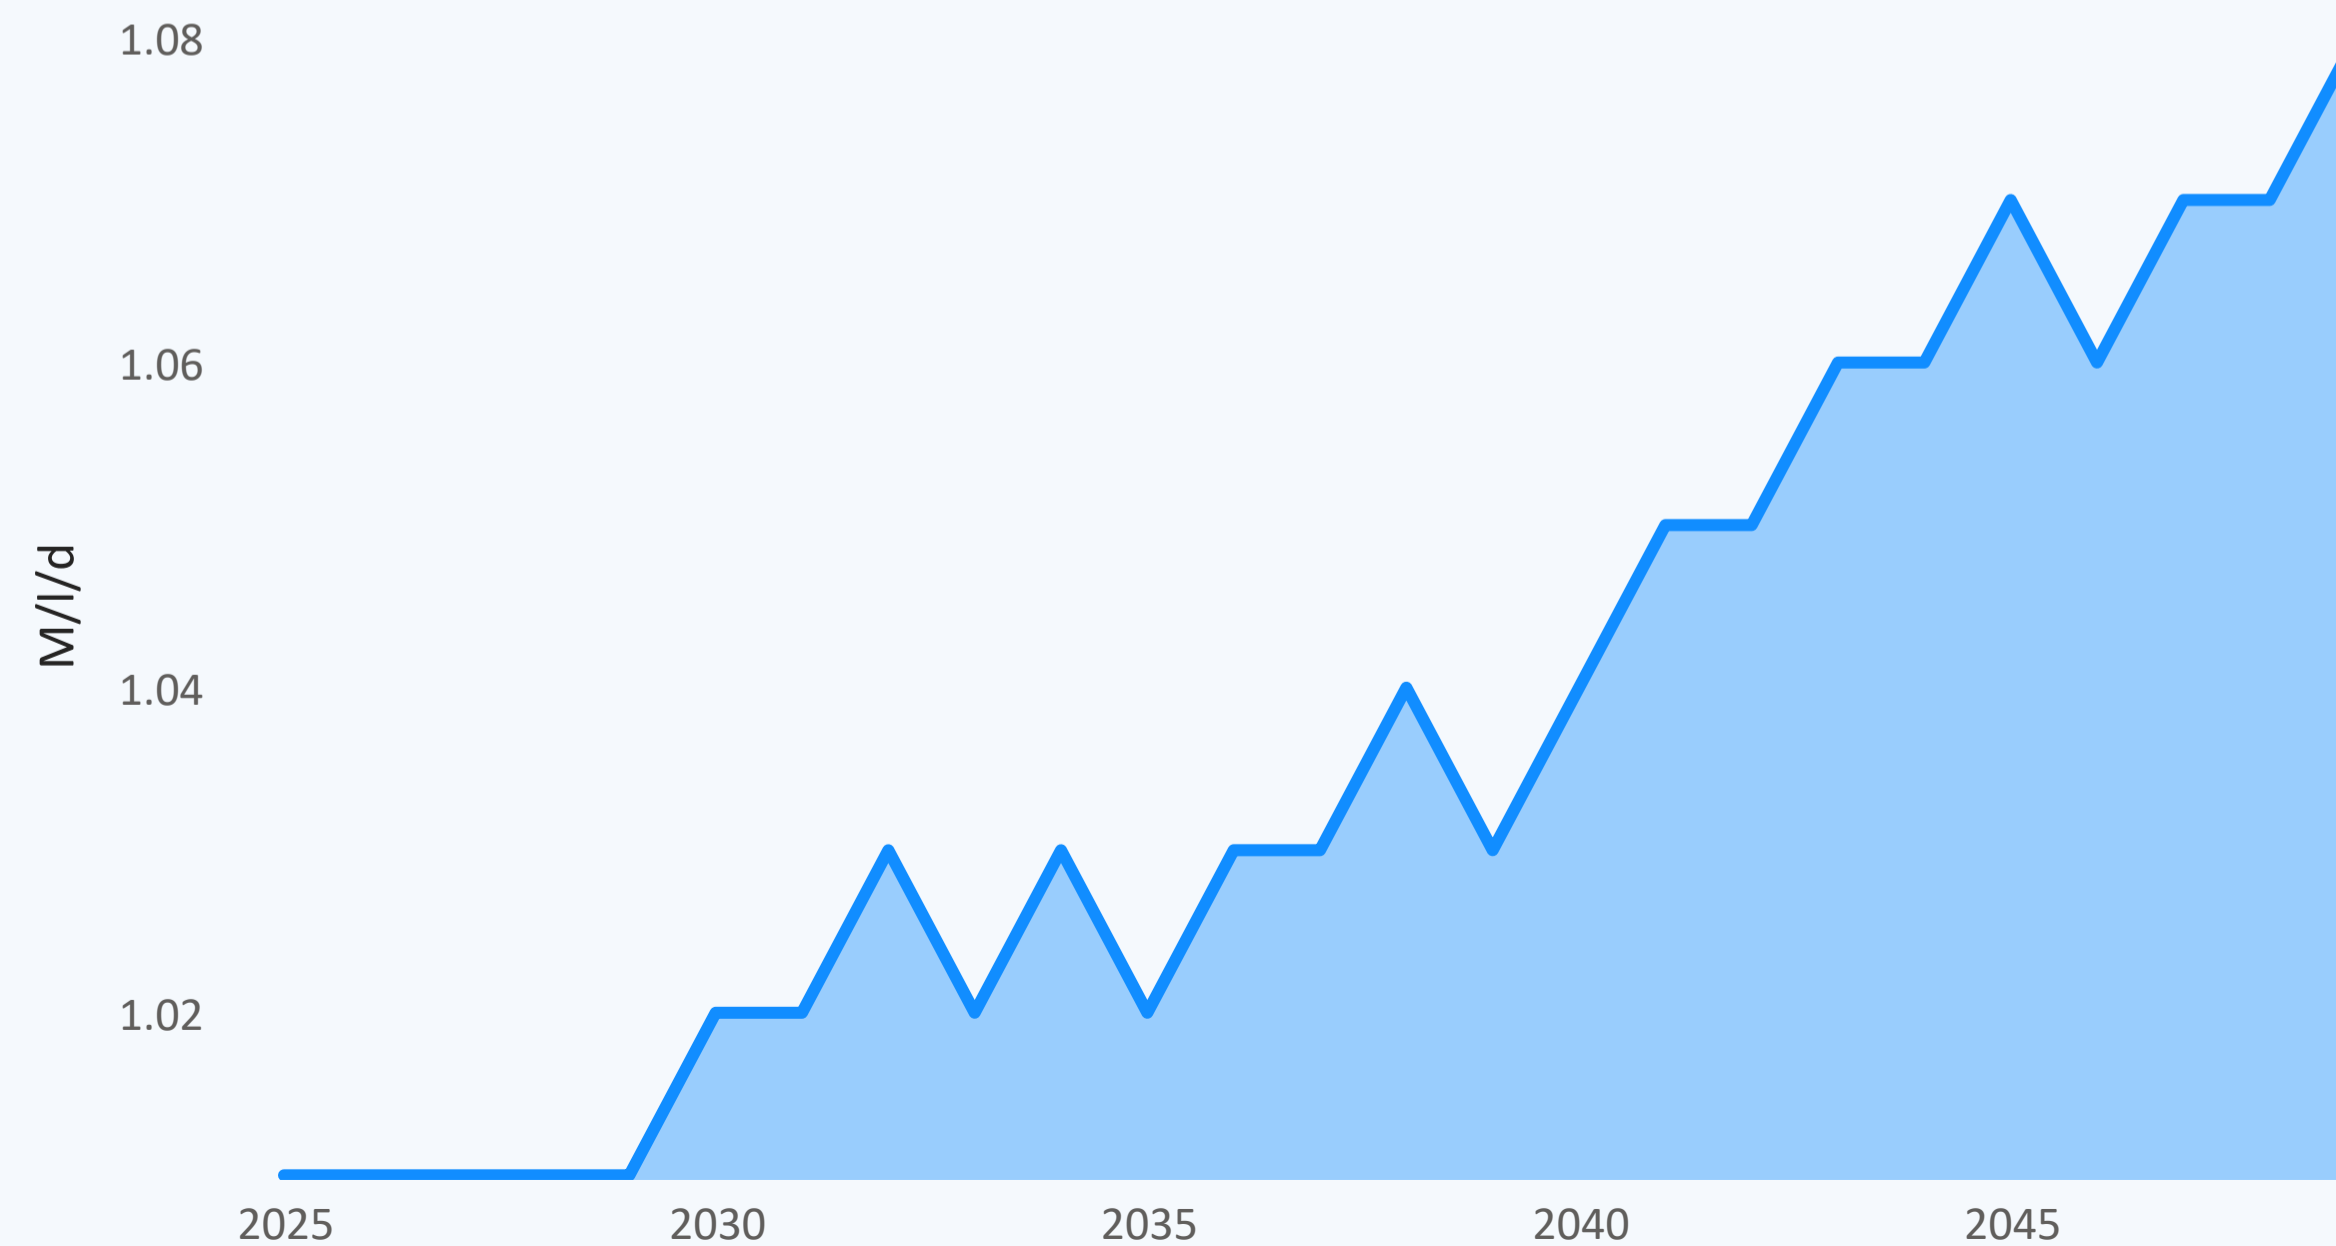

### 3. Deployable Output summary

#### DYAA

#### Essex South



#### 3.1 Resource Zone geography: Essex South:

The South Essex WRZ covers an area of 591 sq. km and is based on the supply systems for Colchester and Braintree. Water is supplied from a combination of groundwater abstractions in the Essex Chalk Aquifer and surface water via Ardleigh Reservoir.

#### 3.2

Baseline deployable output (including 1:500 drought): *60.2 MI/d*

#### Deployable output reductions

Restoring sustainable abstraction (recent actual average): *-3.9 MI/d*

Reductions to achieve environmental destination (BAU+): *-27.0 MI/d* by 2040.

Climate change: *-1.2 MI/d* by 2050.

Baseline deployable output reduces by a total of *-32.1 MI/d* by 2050 a reduction of 53.3%.

**Table 3: supply characteristics (all values are MI/d)**


	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
DO pre forecast changes	60.2	60.2	60.2	60.2	60.2
Change in DO due to climate change	-0.8	-0.9	-1.0	-1.1	-1.2
DO reductions to restore sustainable abstraction	-3.9	-3.9	-3.9	-3.9	-3.9
DO reductions for Environmental Destination	0.0	0.0	0.0	-27.0	-27.0
Change in DO from drought measures	0.0	0.0	0.0	0.0	0.0
<b>Final DO</b>	<b>55.5</b>	<b>55.4</b>	<b>55.3</b>	<b>28.2</b>	<b>28.1</b>
Raw water losses (-ve)	-0.6	-0.6	-0.6	-0.6	-0.6
Outage Allowance (-ve)	-0.4	-0.4	-0.4	-0.4	-0.4
<b>WAFU (own sources)</b>	<b>54.5</b>	<b>54.4</b>	<b>54.4</b>	<b>27.3</b>	<b>27.2</b>
Net Transfers	0.6	-6.7	-6.1	-6.9	-6.9
Other benefits	8.68	16.58	14.20	40.20	40.20
<b>Total Water Available for Use</b>	<b>63.8</b>	<b>64.3</b>	<b>62.4</b>	<b>60.6</b>	<b>60.5</b>

**3.3** The baseline Deployable Output data presented in this section represents the Environment Agency's preferred sustainability reduction licence cap scenario. This includes recent actual average caps to time limited licences in 2022-24 and caps to all other permanent licences by 2030. The impact of 1:500 drought resilience has also been applied from 2025 rather than the preferred scenario of 2039/2040. These factors apply to the baseline forecast only. For the final plan forecast we have applied our best value scenario for licence caps, which was developed following an iterative process to deliver licence caps as early as possible. The transition to 1:500 drought resilience occurs in 2039/40 in the final plan forecast. Further information is available in the WRMP24 Decision Making technical supporting document, section 6.





# 4. Population & Housing

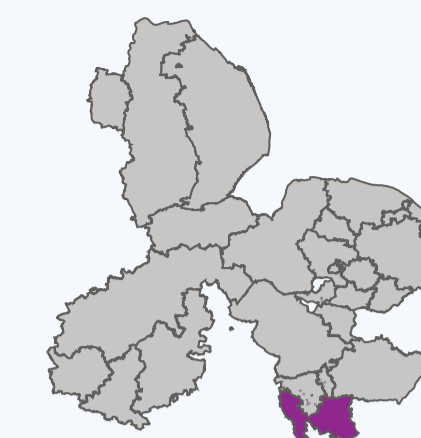


## Essex South

**4.1** Over the WRMP period, population in **Essex South** is set to increase from **271144** in 2025 to **322115** in 2049-50 - this is an increase of **18.8 %** over the 25 years.

**Table 4a: Population totals (cumulative) by AMP**

Year	Total Population (000s)
2029-30 (end of AMP8)	281.711
2034-35 (end of AMP9)	291.647
2039-40 (end of AMP10)	300.770
2044-45 (end of AMP11)	311.627
2049-50 (end of AMP12)	322.115

**Figure 2: Total Resource Zone Population**

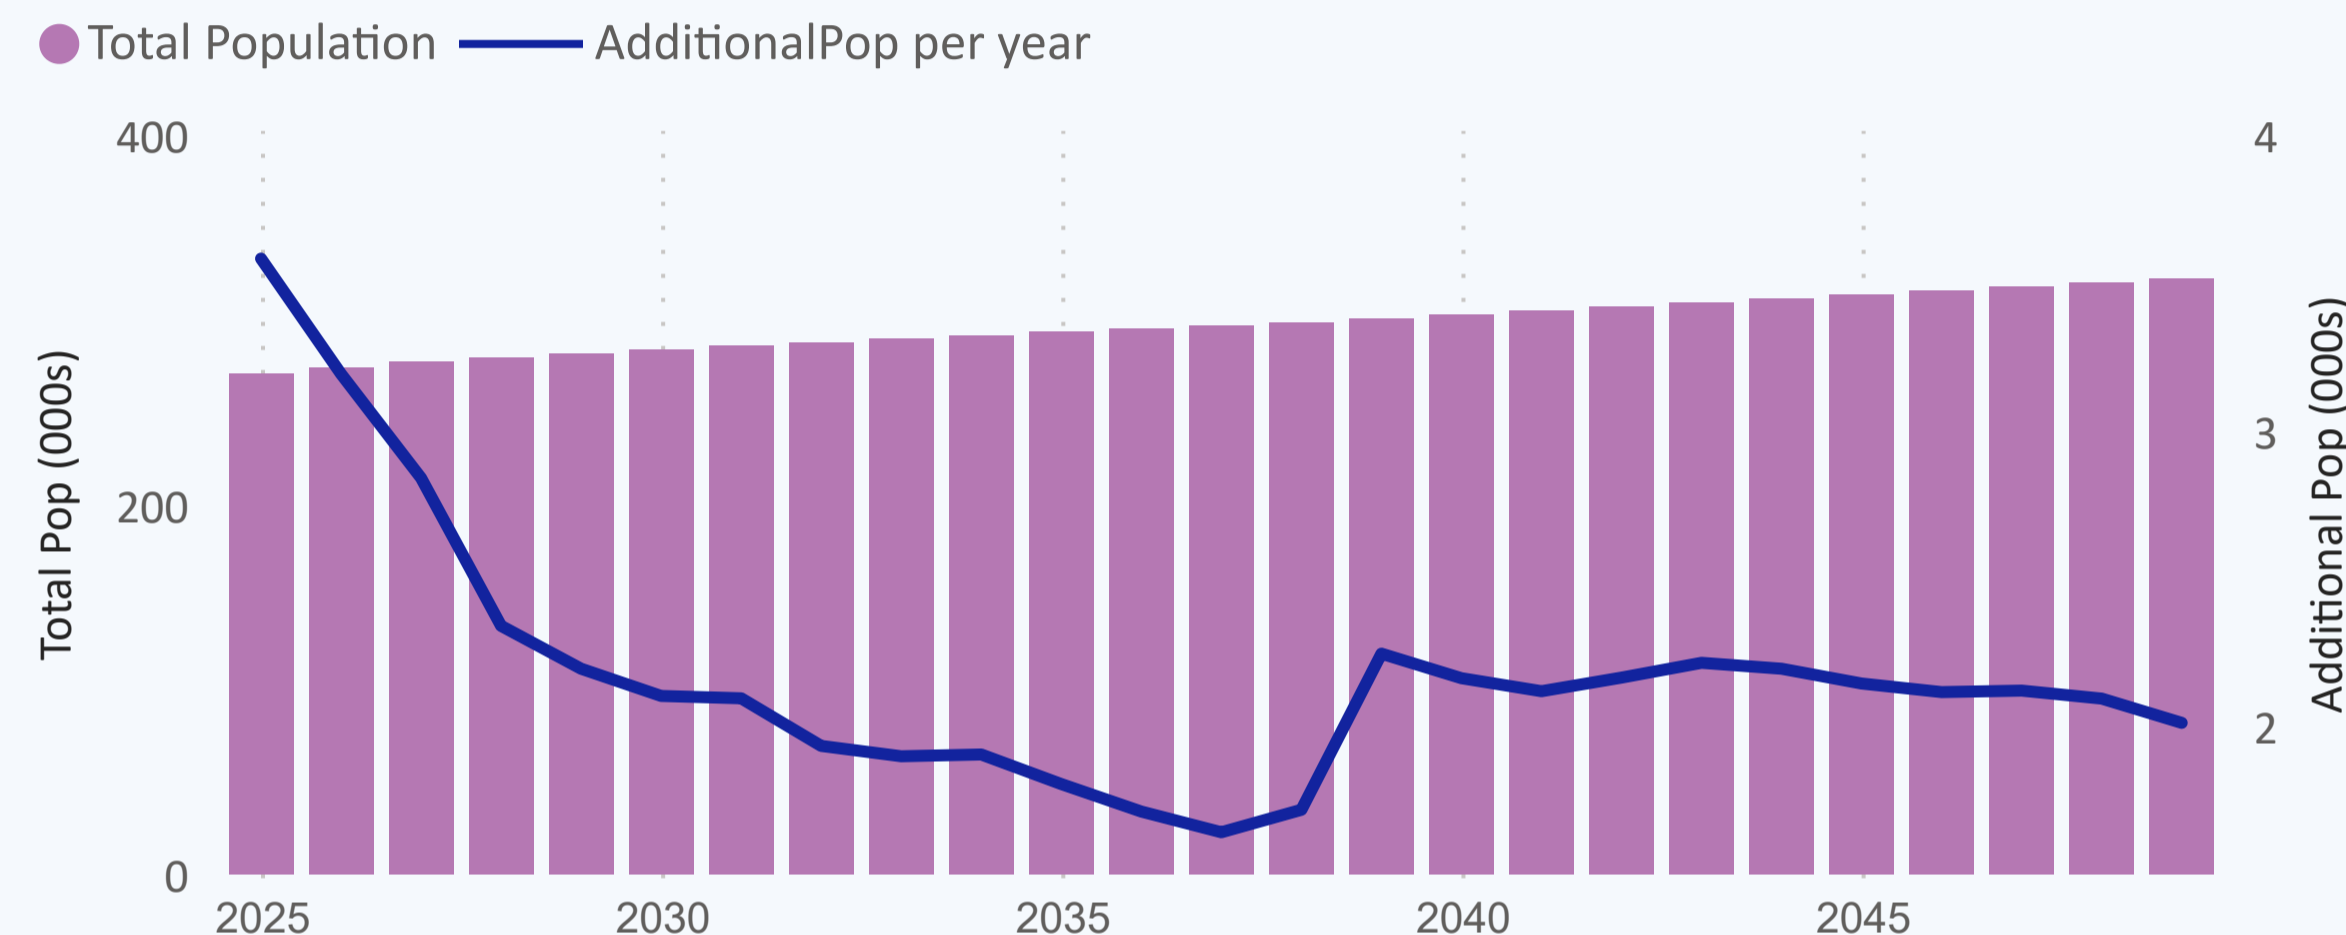


**4.2** Over the WRMP period, property numbers in **Essex South** are set to increase from **111340** in 2025 to **138622** in 2049-50 - this is an increase of **24.5 %** over the 25 years.

**Table 4b: Property totals (cumulative) by AMP**

Year	Total Properties-excl voids (000s)
2029-30 (end of AMP8)	117.319
2034-35 (end of AMP9)	123.652
2039-40 (end of AMP10)	129.008
2044-45 (end of AMP11)	133.991
2049-50 (end of AMP12)	138.622

**Figure 3: Total Resource Zone Properties (excl. voids)**

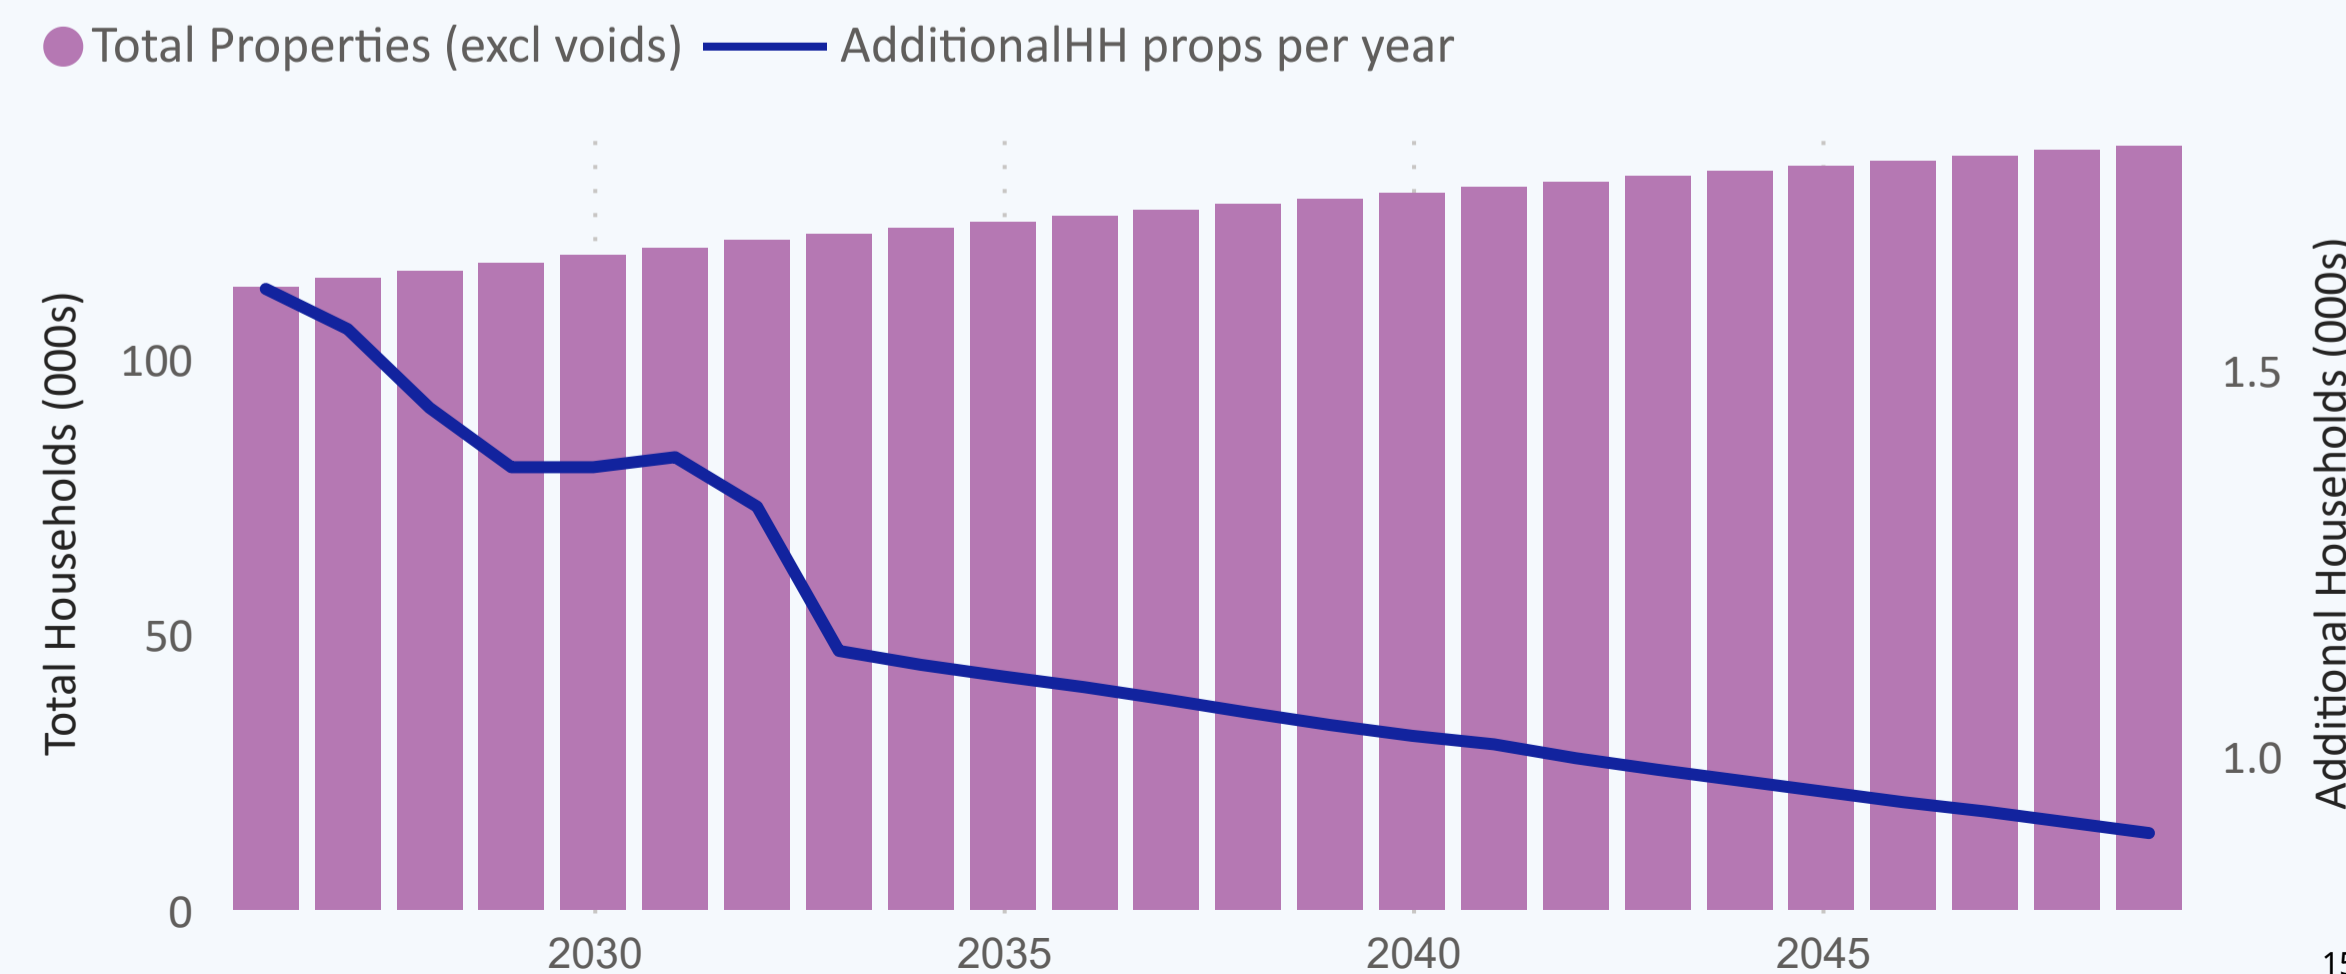

# 5. Baseline Supply Demand Balance DYAA

Essex South

Essex South

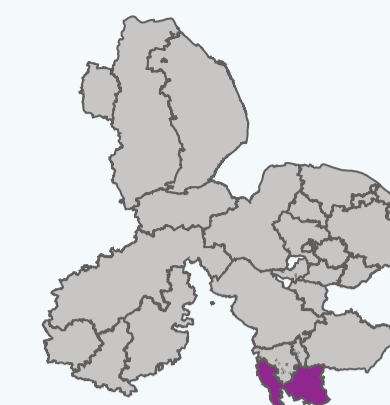


Figure 4: Essex South baseline supply demand balance to 2050 for Dry Year Annual Average conditions

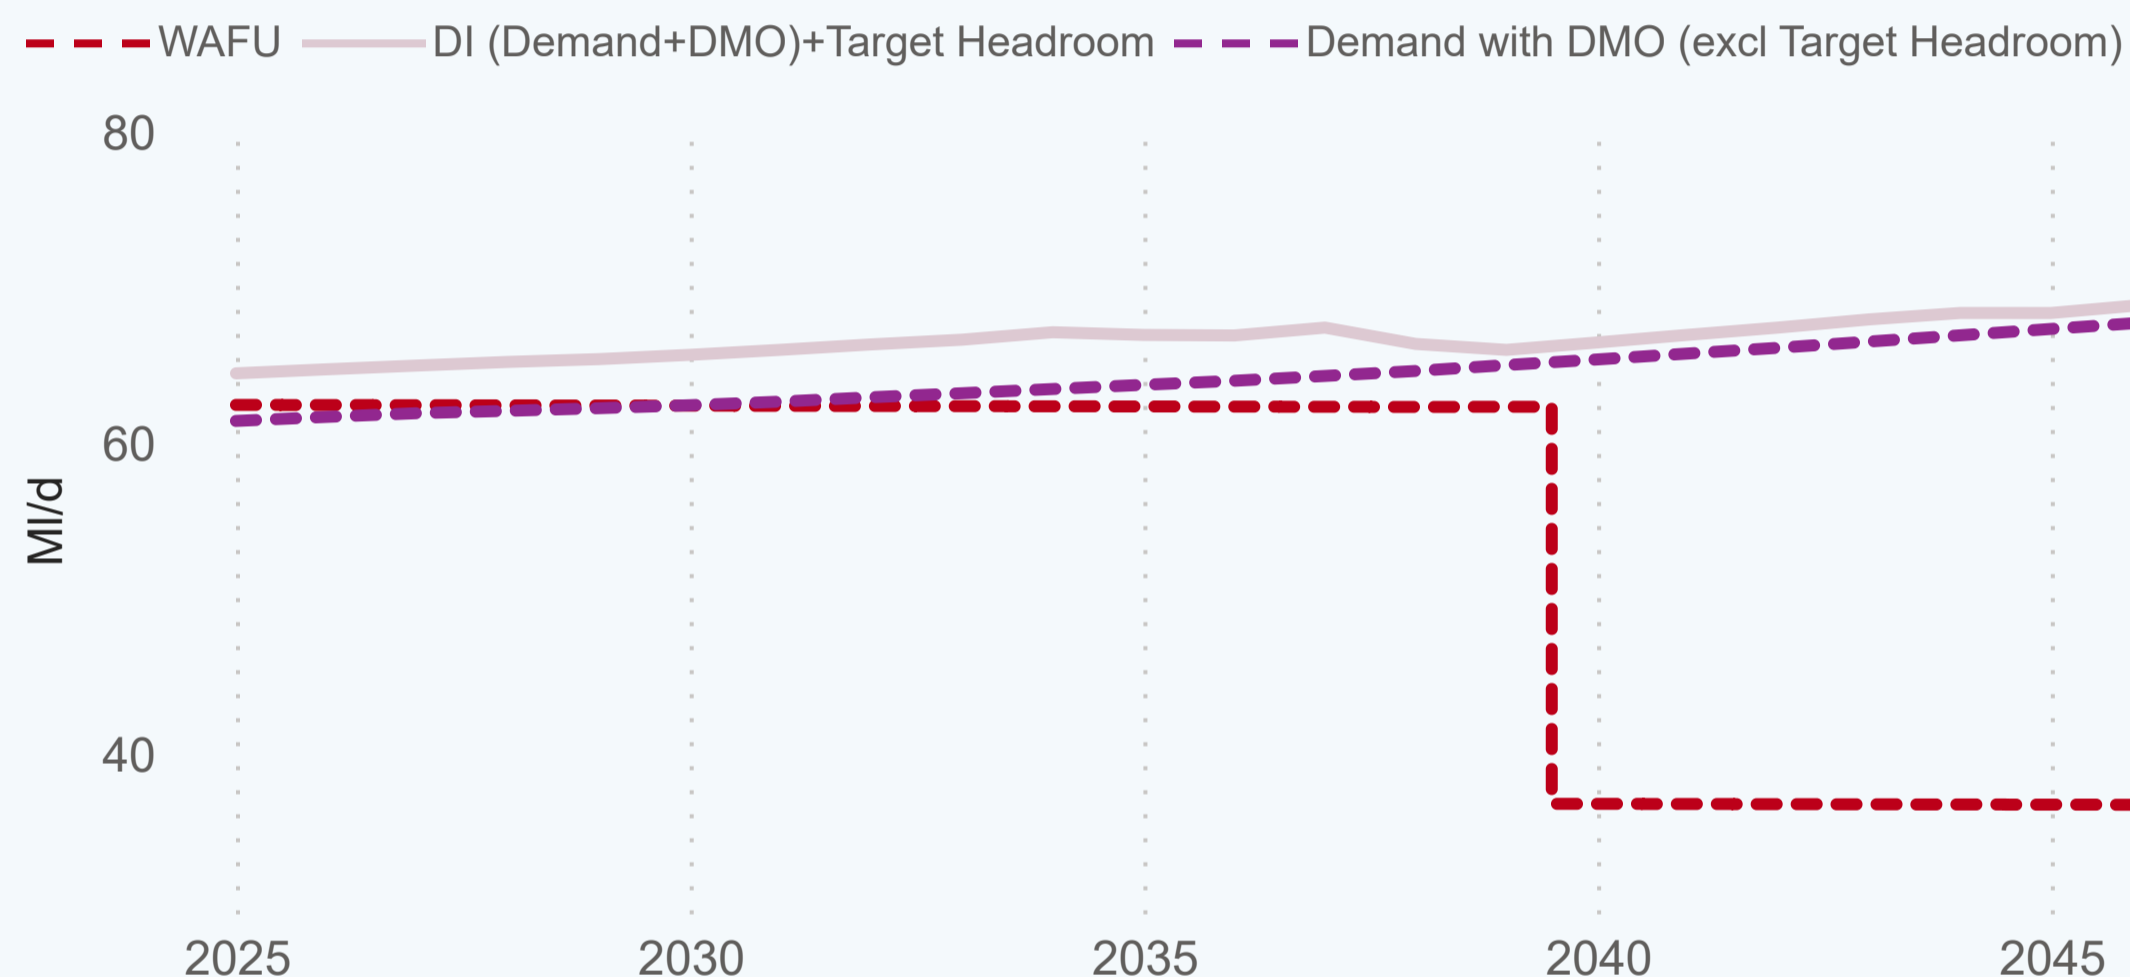


Table 5a: Baseline supply demand balance 2025 - 2050 for DYAA conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	54.6	54.5	54.4	54.4	27.3	27.2
Net Transfers	7.9	7.9	7.9	8.0	9.5	9.6
Total Water Available For Use	62.5	62.4	62.4	62.4	36.8	36.8
Distribution Input	61.4	62.3	63.5	65.0	66.9	69.0
Target Headroom	3.1	3.2	3.6	1.0	1.4	1.1
Supply Demand Balance	-2.0	-3.0	-4.8	-3.7	-31.6	-33.3

Table 5b: Baseline demand forecast (without preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	32.2	33.8	35.8	37.8	39.8	41.5
Water delivered unmeasured household	6.8	5.9	5.0	4.3	3.7	3.6
Total Leakage	11.7	11.5	11.5	11.5	11.5	11.6
Water delivered measured non-household	10.9	11.1	11.2	11.4	11.8	12.4
Water delivered unmeasured non-household	0.0	0.1	0.1	0.1	0.1	0.1
Distribution Input	61.4	62.3	63.5	65.0	66.9	69.0

## 5.1 DYAA BL supply demand summary: Essex South

Baseline Supply Demand Balance: This zone will go into deficit immediately (under the preferred baseline scenario - as described in section 3.3).

- Demand Forecast: Baseline household demand (measured and unmeasured) is forecast to change from 39.0 MI/d in 2025 to 45.1 MI/d in 2050, a percentage change of 15.5 %.
- Baseline Leakage: is forecast to change from 11.7 MI/d in 2025 to 11.6 MI/d by 2050.
- Baseline Non-Household demand: is expected to change from 10.9 MI/d to 12.4 MI/d.
- Baseline Distribution Input: is expected to change from 61.4 MI/d to 69.0 MI/d by 2050.

Nb. 'Deficit' is one outcome of the calculation WAFU minus Distribution Input (including Target Headroom).

# 6. Baseline Supply Demand Balance DYCP

Essex South

Essex South

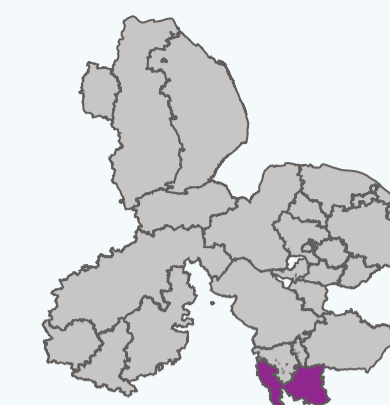


Figure 5: Essex South baseline supply demand balance to 2050 for Dry Year Critical Period conditions

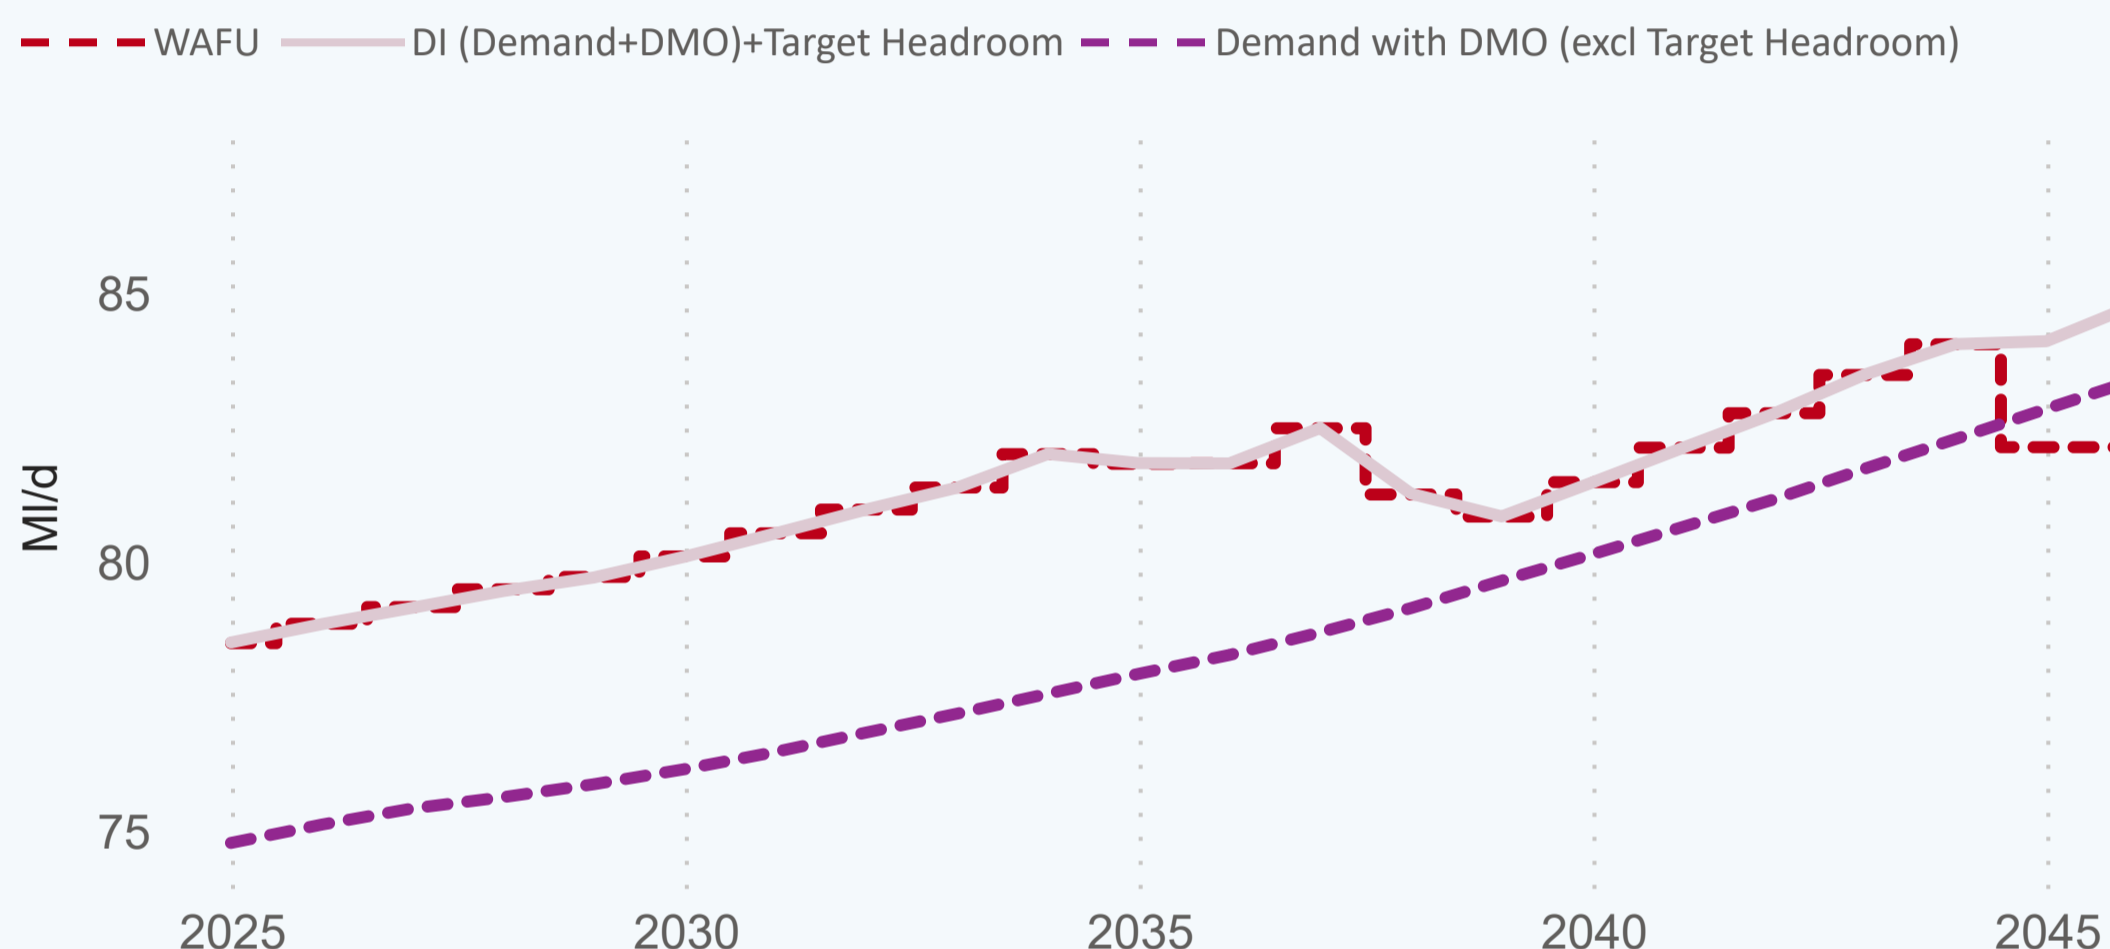


Table 6b: Baseline demand forecast with DYCP conditions (without preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	40.9	43.0	45.6	48.4	51.2	53.5
Water delivered unmeasured household	9.0	7.7	6.6	5.7	5.0	4.8
Total Leakage	11.7	11.5	11.5	11.5	11.5	11.6
Water delivered measured non-household	13.4	13.7	13.8	14.1	14.6	15.3
Water delivered unmeasured non-household	0.0	0.0	0.1	0.1	0.1	0.1
Distribution Input	74.8	75.9	77.6	79.7	82.3	85.1

Table 6a: Baseline supply demand balance 2025 - 2050 for DYCP conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	90.6	90.6	90.6	90.6	90.6	82.1
Net Transfers	-12.1	-10.9	-8.6	-9.8	-6.6	0.0
Total Water Available For Use	78.5	79.7	82.0	80.8	84.0	82.1
Distribution Input	74.8	75.9	77.6	79.7	82.3	85.1
Target Headroom	3.7	3.8	4.5	1.2	1.8	1.3
Supply Demand Balance	0.0	0.0	0.0	0.0	0.0	-4.3

## 6.1 DYCP BL supply demand summary: Essex South

Baseline Supply Demand balance: This zone is not expected to go into deficit

- Demand Forecast: Baseline household demand (measured and unmeasured) is forecast to change from 49.9 MI/d in 2025 to 58.3 MI/d in 2050, a percentage change of 17.0 %.
- Baseline Leakage: is forecast to change from 11.7 MI/d in 2025 to 11.6 MI/d by 2050.
- Baseline Non-Household demand: is expected to change from 13.4 MI/d to 15.3 MI/d.
- Baseline Distribution Input: is expected to change from 74.8 MI/d to 85.1 MI/d by 2050.


Nb. 'Deficit' is one outcome of the calculation WAFU minus Distribution Input (including Target Headroom).




# 7. Demand forecast and PCC



## Essex South

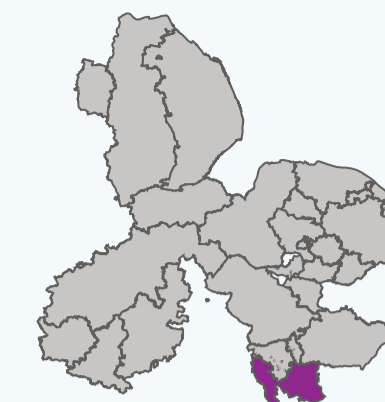

**Figure 6: Essex South DYAA DI with and without demand management strategy**

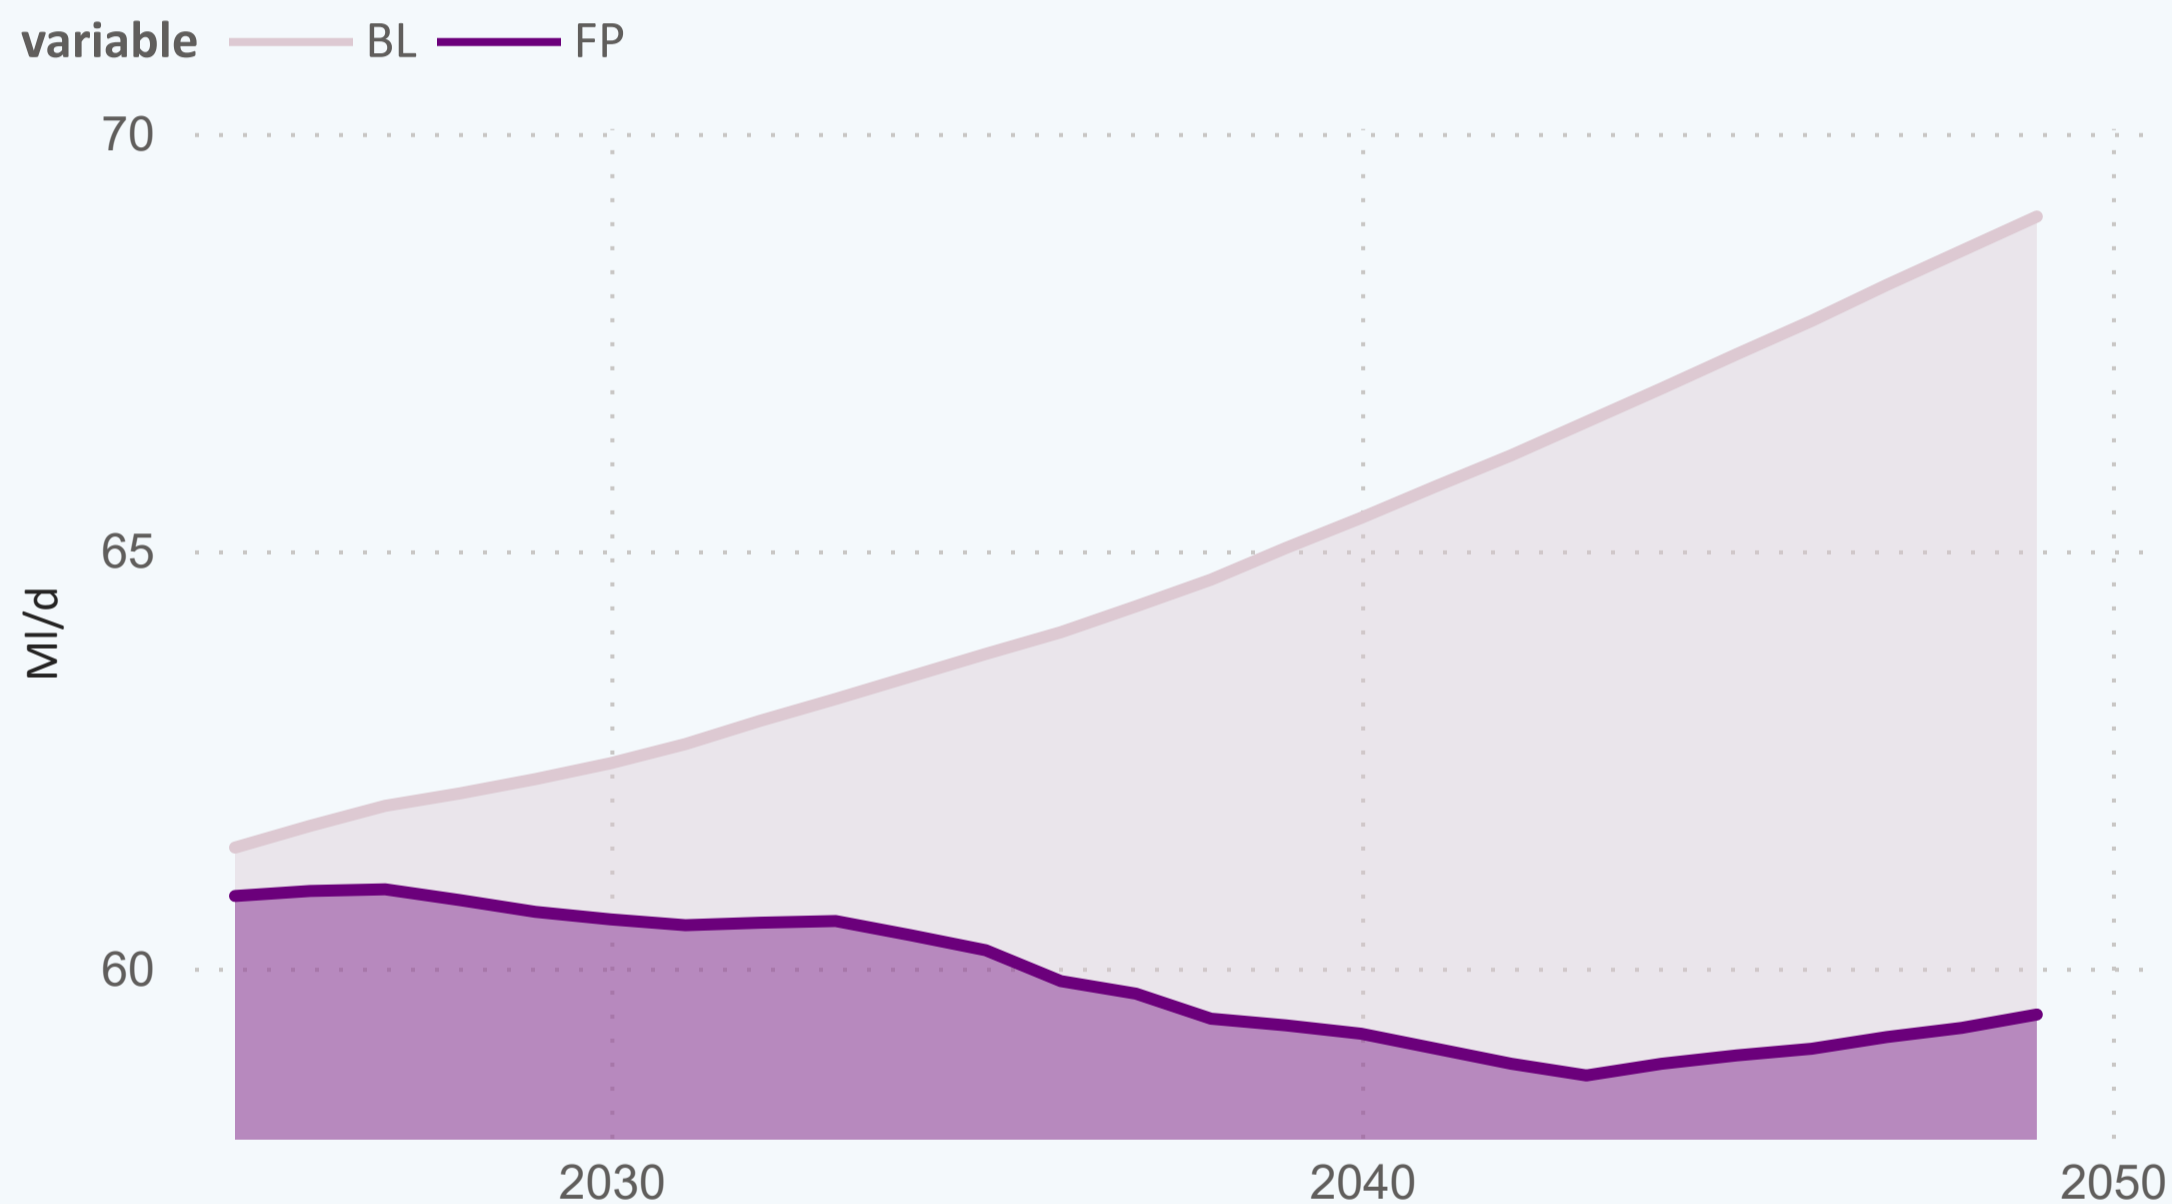

**Table 7a: Demand - baseline and final plan**

variable	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
BL	62.3	63.5	65.0	66.9	69.0
FP	60.7	60.4	59.3	58.9	59.4

### 7.2 Demand Essex South (see Table 7a)

Baseline demand is expected to increase from 61.4 (MI/d) in 2025 to 69.0 (MI/d) in 2050. With demand management options in place, demand is expected to be 59.4 (MI/d).

### 7.1 PCC Essex South (see Table 7b)

Per Capita Consumption (PCC) in the base year 2025/26 is 131.3 (l/h/d) measured and 182.7 (l/h/d) unmeasured.

The weighted average PCC (l/h/d) comes in at 137.8 (l/h/d) in 2025/26. This is forecast to fall to 116.1 (l/h/d) in the Final Plan forecast as demand management option savings are realised and customers switch from unmeasured to measured status

**Table 7b: DMO strategy Final Plan**

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
BL demand forecast(DYAA)	135.4	134.7	134.9	134.9	135.1
FP demand forecast(DYAA)	132.5	128.4	122.8	117.9	116.1
% change BL to FP	-2.1%	-4.7%	-9.0%	-12.6%	-14.1%






# 8. Demand management options



## Essex South

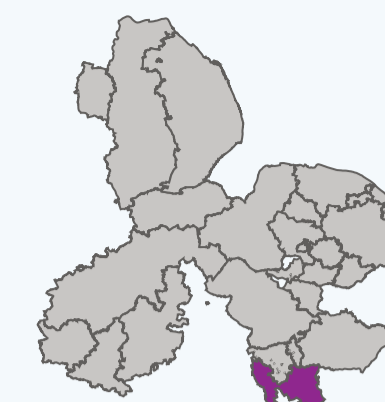

### 8.1 Regional overview:

Across the entirety of the Anglian Water region our demand management strategy will comprise three strongly interlinked programs:

#### Water metering program:

- We intend to complete our current smart meter rollout which will replace our entire meter stock over 10 years (2 AMPs), noting that 1.1M smart meters will be installed across Anglian Water by 2025. The information resulting from 'smart metering' will help inform our customers regarding their water usage and will assist in our ability to influence this behaviour. It will also help with our ability to detect leakage, significantly reducing plumbing losses and customer supply pipe leaks.

#### Leakage reduction

- Our aim is to reduce leakage by more than 45MI/d from 2025 to 2050 across the whole Anglian Water area, building upon our ambitious program of leakage reduction in AMP7 (14% reduction of more than 27MI/d across the region by 2025).

#### Water efficiency measures

- New technologies and interventions will help promote the careful use of water. Additional water efficiency programs will include: the promotion of 'Smart' devices; further development of our Multi-utility web-portal; garden advice; support for vulnerable customers with plumbing loss and cspl; Community reward schemes. As part of our revised draft WRMP24 we have developed and included 'water efficiency visits' and leakage reduction measures for our Non-Household customers.

Figure 7: DMO strategy Final Plan for Essex South

For full chart key see table below


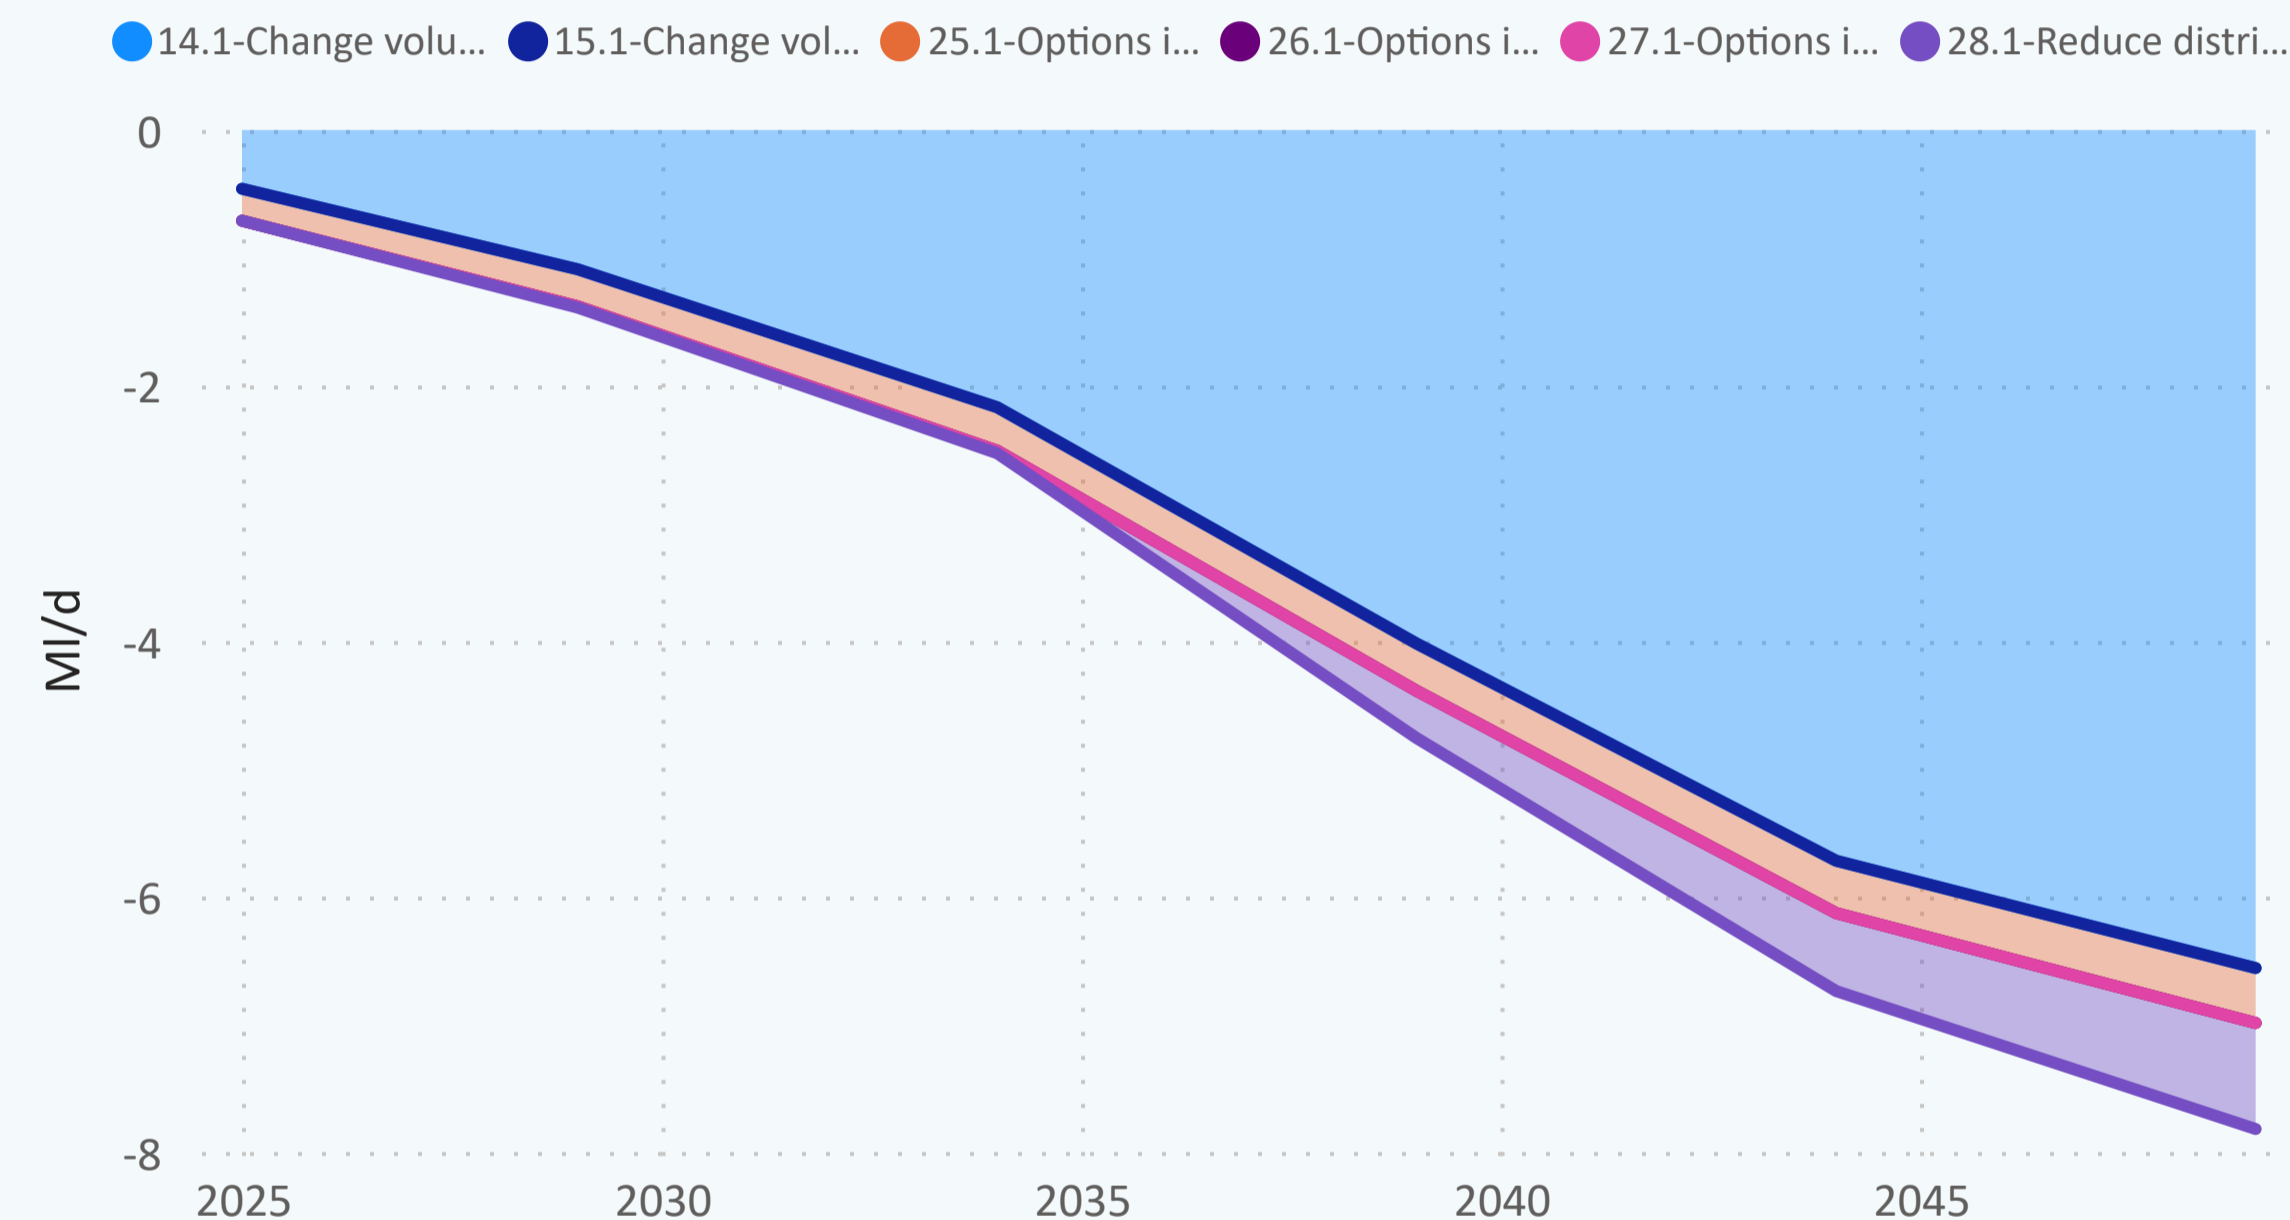


Table 8: DMO strategy Final Plan for Essex South

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
14.1-Change volume delivered to measured households( -ve)	-1.1	-2.2	-4.0	-5.7	-6.6
15.1-Change volume delivered to unmeasured households( -ve)	0.0	0.0	0.0	0.0	0.0
25.1-Options impacting on measured Household - USPL ( -ve)	-0.3	-0.3	-0.4	-0.4	-0.4
26.1-Options impacting on unmeasured Household - USPL (-ve)	0.0	0.0	0.0	0.0	0.0
27.1-Options impacting on Void properties - USPL (-ve)	0.0	0.0	0.0	0.0	0.0
28.1-Reduce distribution losses (-ve)	0.0	0.0	-0.4	-0.6	-0.8

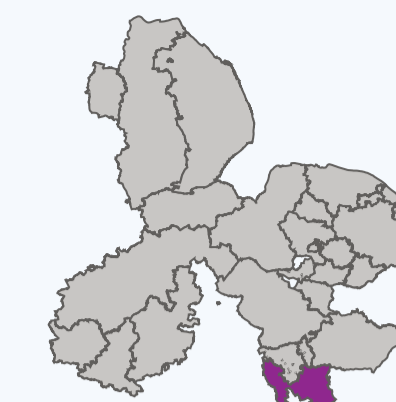

# 9. Final Plan Supply Demand Balance DYAA

Essex South

Figure 8: Essex South final plan SDB to 2050 for Dry Year Annual Average conditions

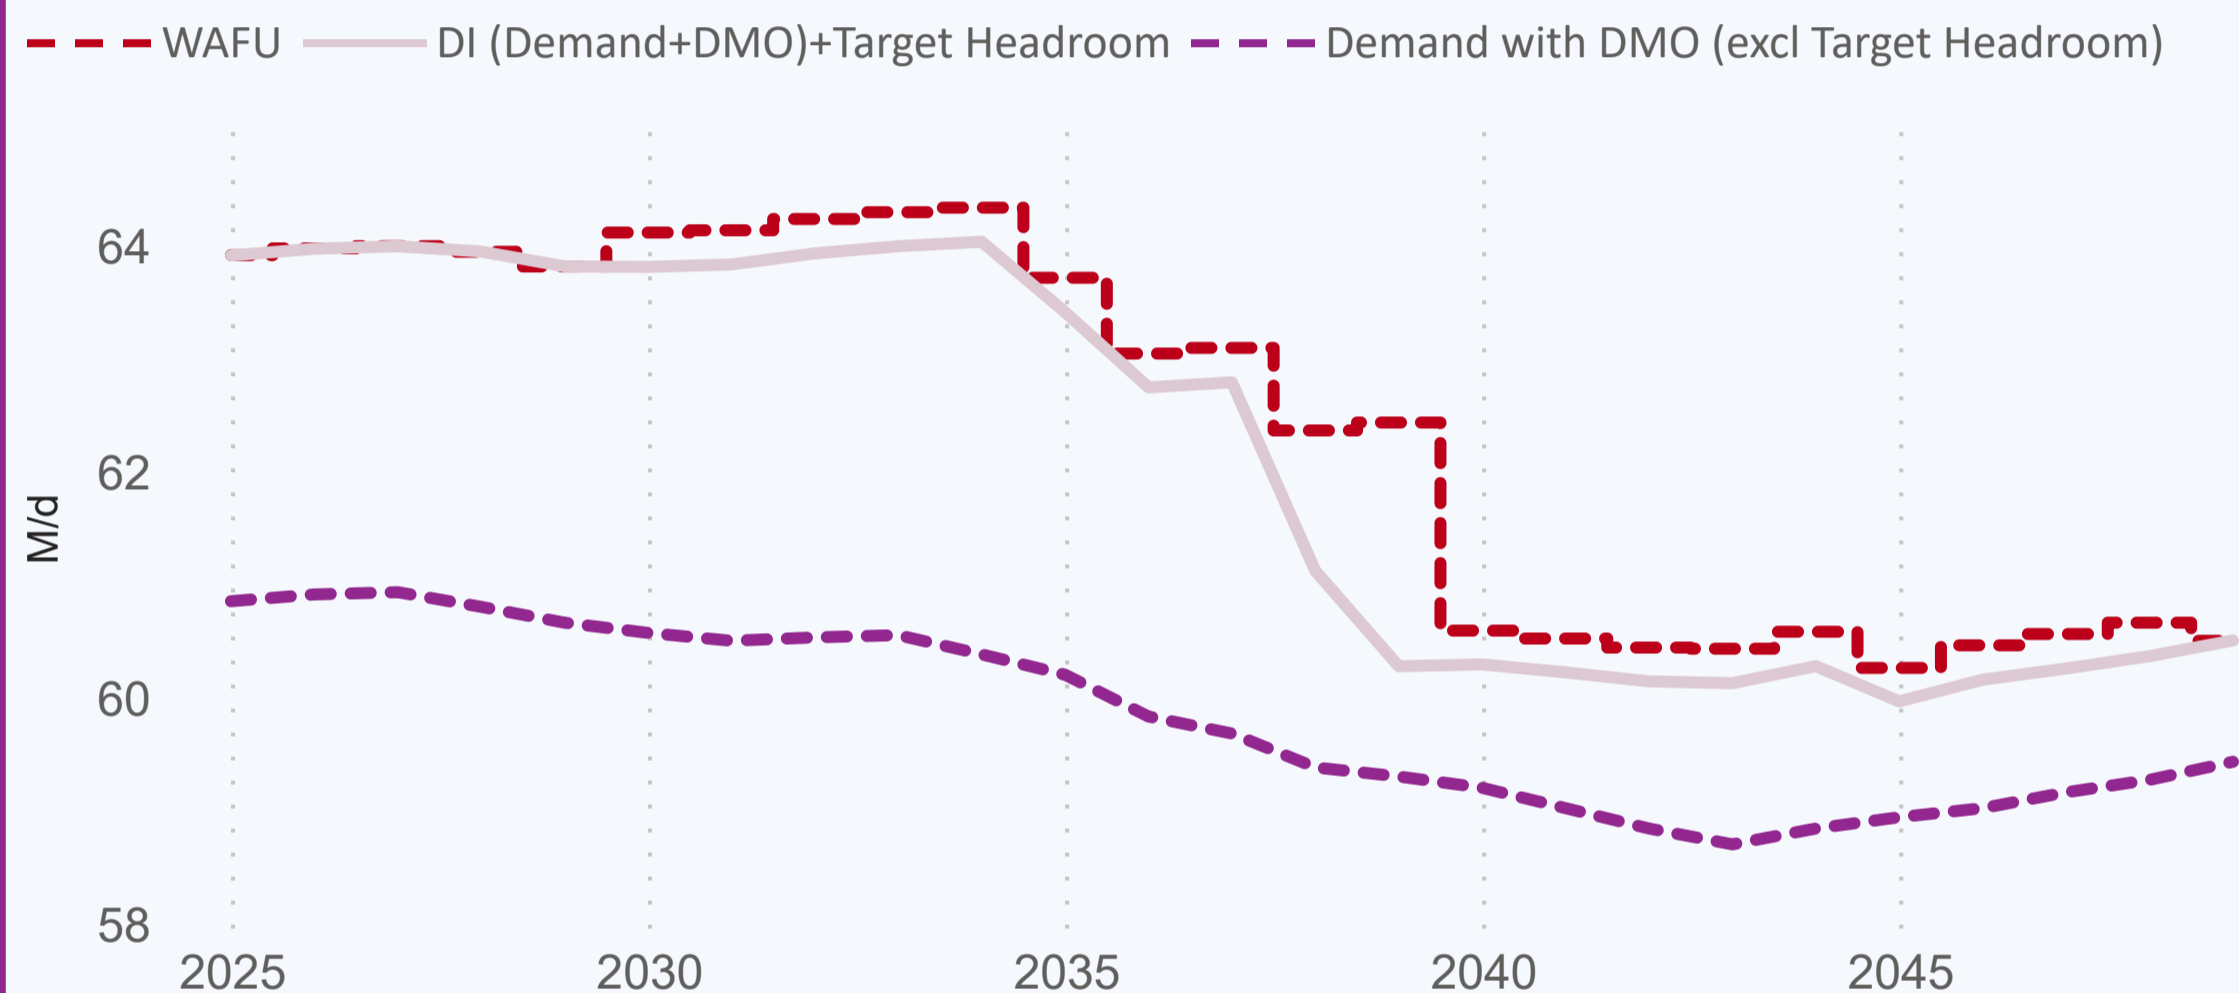


Table 9a: final plan SDB to 2050 for Dry Year conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	63.5	63.2	71.0	68.6	67.5	67.4
Net Transfers	0.4	0.6	-6.7	-6.1	-6.9	-6.9
Total Water Available For Use	63.9	63.8	64.3	62.4	60.6	60.5
Distribution Input	60.9	60.7	60.4	59.3	58.9	59.4
Target Headroom	3.1	3.2	3.6	1.0	1.4	1.1
Supply Demand Balance	0.0	0.0	0.3	2.2	0.3	0.0

Table 9b: Final Plan demand forecast for DYAA conditions (with preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	31.8	32.7	33.6	33.8	34.1	34.9
Water delivered unmeasured household	6.8	5.9	5.0	4.3	3.7	3.6
Total Leakage	11.4	11.2	11.1	10.7	10.5	10.3
Water delivered measured non-household	10.8	10.6	10.3	10.1	10.1	10.2
Water delivered unmeasured non-household	0.0	0.1	0.1	0.1	0.1	0.1
Distribution Input	60.9	60.7	60.4	59.3	58.9	59.4

## 9.1 DYAA FP supply demand summary: Essex South

The zone is in balance.

- Demand Forecast: Final Plan household demand (measured and unmeasured) is forecast to change from 38.6 MI/d in 2025 to 38.5 MI/d in 2050, a percentage change of -0.2 %.
- Final Plan Leakage is forecast to change from 11.4 MI/d in 2025 to 10.3 MI/d by 2050.
- Final Plan Non-Household demand is expected to change from 10.8 MI/d to 10.2 MI/d.
- Final Plan Distribution Input is expected to change from 60.9 MI/d to 59.4 MI/d by 2050.

# 10. Final Plan Supply Demand Balance DYCP

Essex South

Essex South

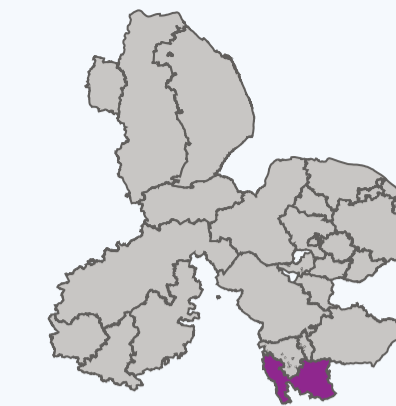


Figure 9: Essex South baseline supply demand balance to 2050 for Dry Year Critical Period conditions

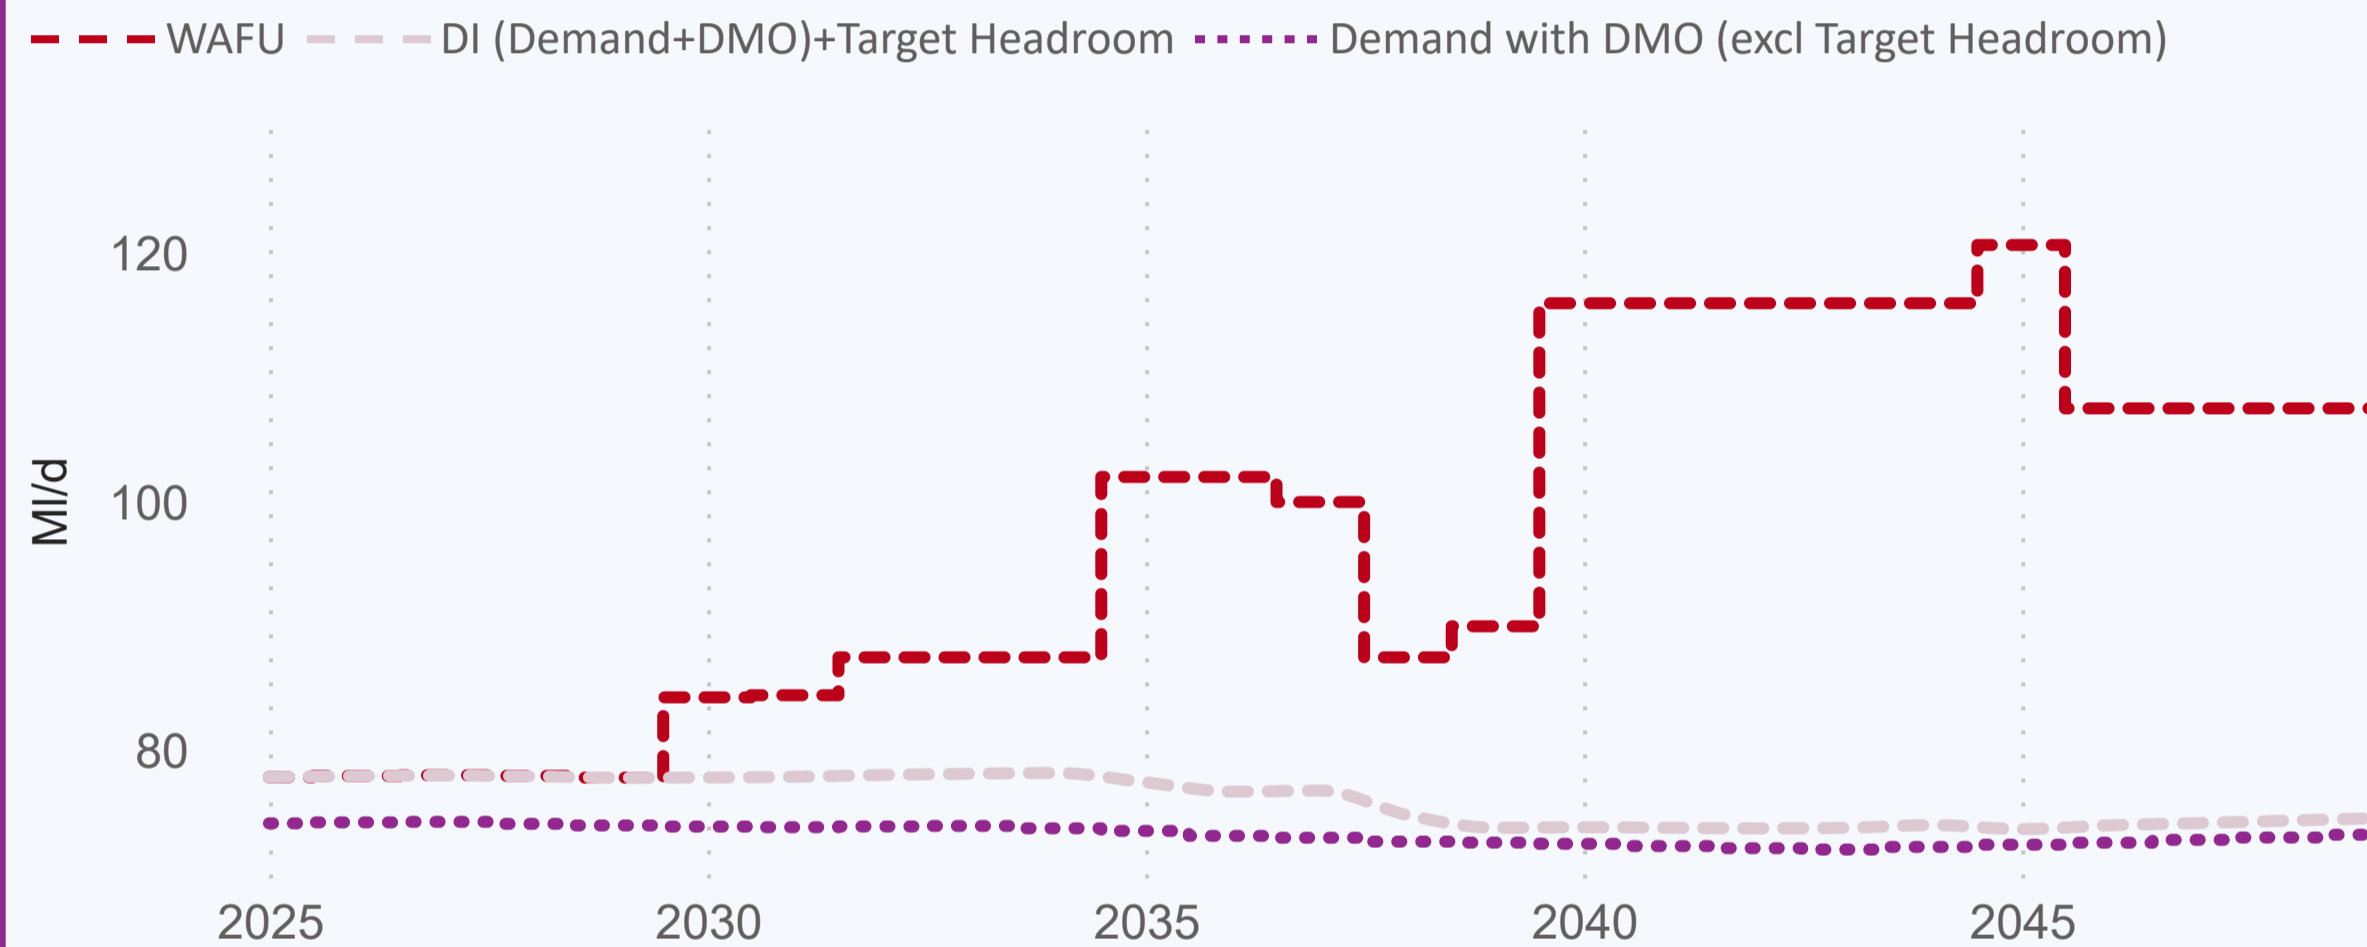


Table 10a: Final Plan supply demand balance 2025 - 2050 for DYCP conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	90.6	90.6	102.3	104.8	130.8	122.3
Net Transfers	-12.8	-12.8	-14.8	-14.8	-14.8	-14.8
Total Water Available For Use	77.8	77.8	87.5	90.0	116.0	107.5
Distribution Input	74.1	74.0	73.7	72.6	72.2	73.2
Target Headroom	3.7	3.8	4.5	1.2	1.8	1.3
Supply Demand Balance	0.0	0.0	9.3	16.2	42.0	33.0

Table 10b: Final Plan demand forecast for DYCP conditions (with preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	40.4	41.6	42.9	43.3	43.9	45.1
Water delivered unmeasured household	9.0	7.7	6.6	5.7	5.0	4.8
Total Leakage	11.4	11.2	11.1	10.7	10.5	10.3
Water delivered measured non-household	13.3	13.1	12.7	12.4	12.4	12.6
Water delivered unmeasured non-household	0.0	0.0	0.1	0.1	0.1	0.1
Distribution Input	74.1	74.0	73.7	72.6	72.2	73.2


## 10.1 DYCP BL supply demand summary: Essex South

The zone is in balance.

- Demand Forecast: Final Plan household demand (measured and unmeasured) is forecast to change from 49.3 MI/d in 2025 to 49.9 MI/d in 2050, a percentage change of 1.2 %.
- Final Plan Leakage: is forecast to change from 11.4 MI/d in 2025 to 10.3 MI/d by 2050
- Final Plan Non-Household demand: is expected to change from 13.3 MI/d to 12.6 MI/d.
- Final Plan Distribution Input: is expected to change from 74.1 MI/d to 73.2 MI/d by 2050.



# 11. Supply Side Strategy

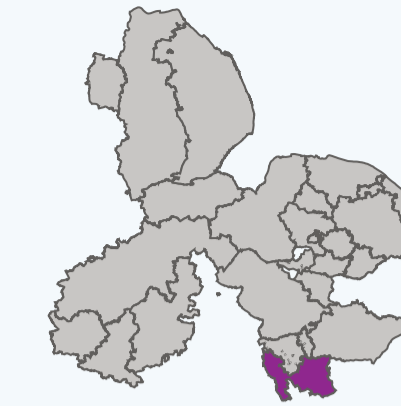

Essex South


**Table 11a: Total Water Available for use Baseline and Final Plan**

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
WAFU - BL	68.1	67.3	62.4	36.8	36.8
WAFU - FP	63.8	64.3	62.4	60.6	60.5

## 11.1 Supply side strategy options.

For details on the feasible options list for Essex South WRZ please refer to the Supply-Side Option Development technical supporting document.

**Figure 10 Water Available for Use (WAFU) - baseline (BL) and final plan (FP)**

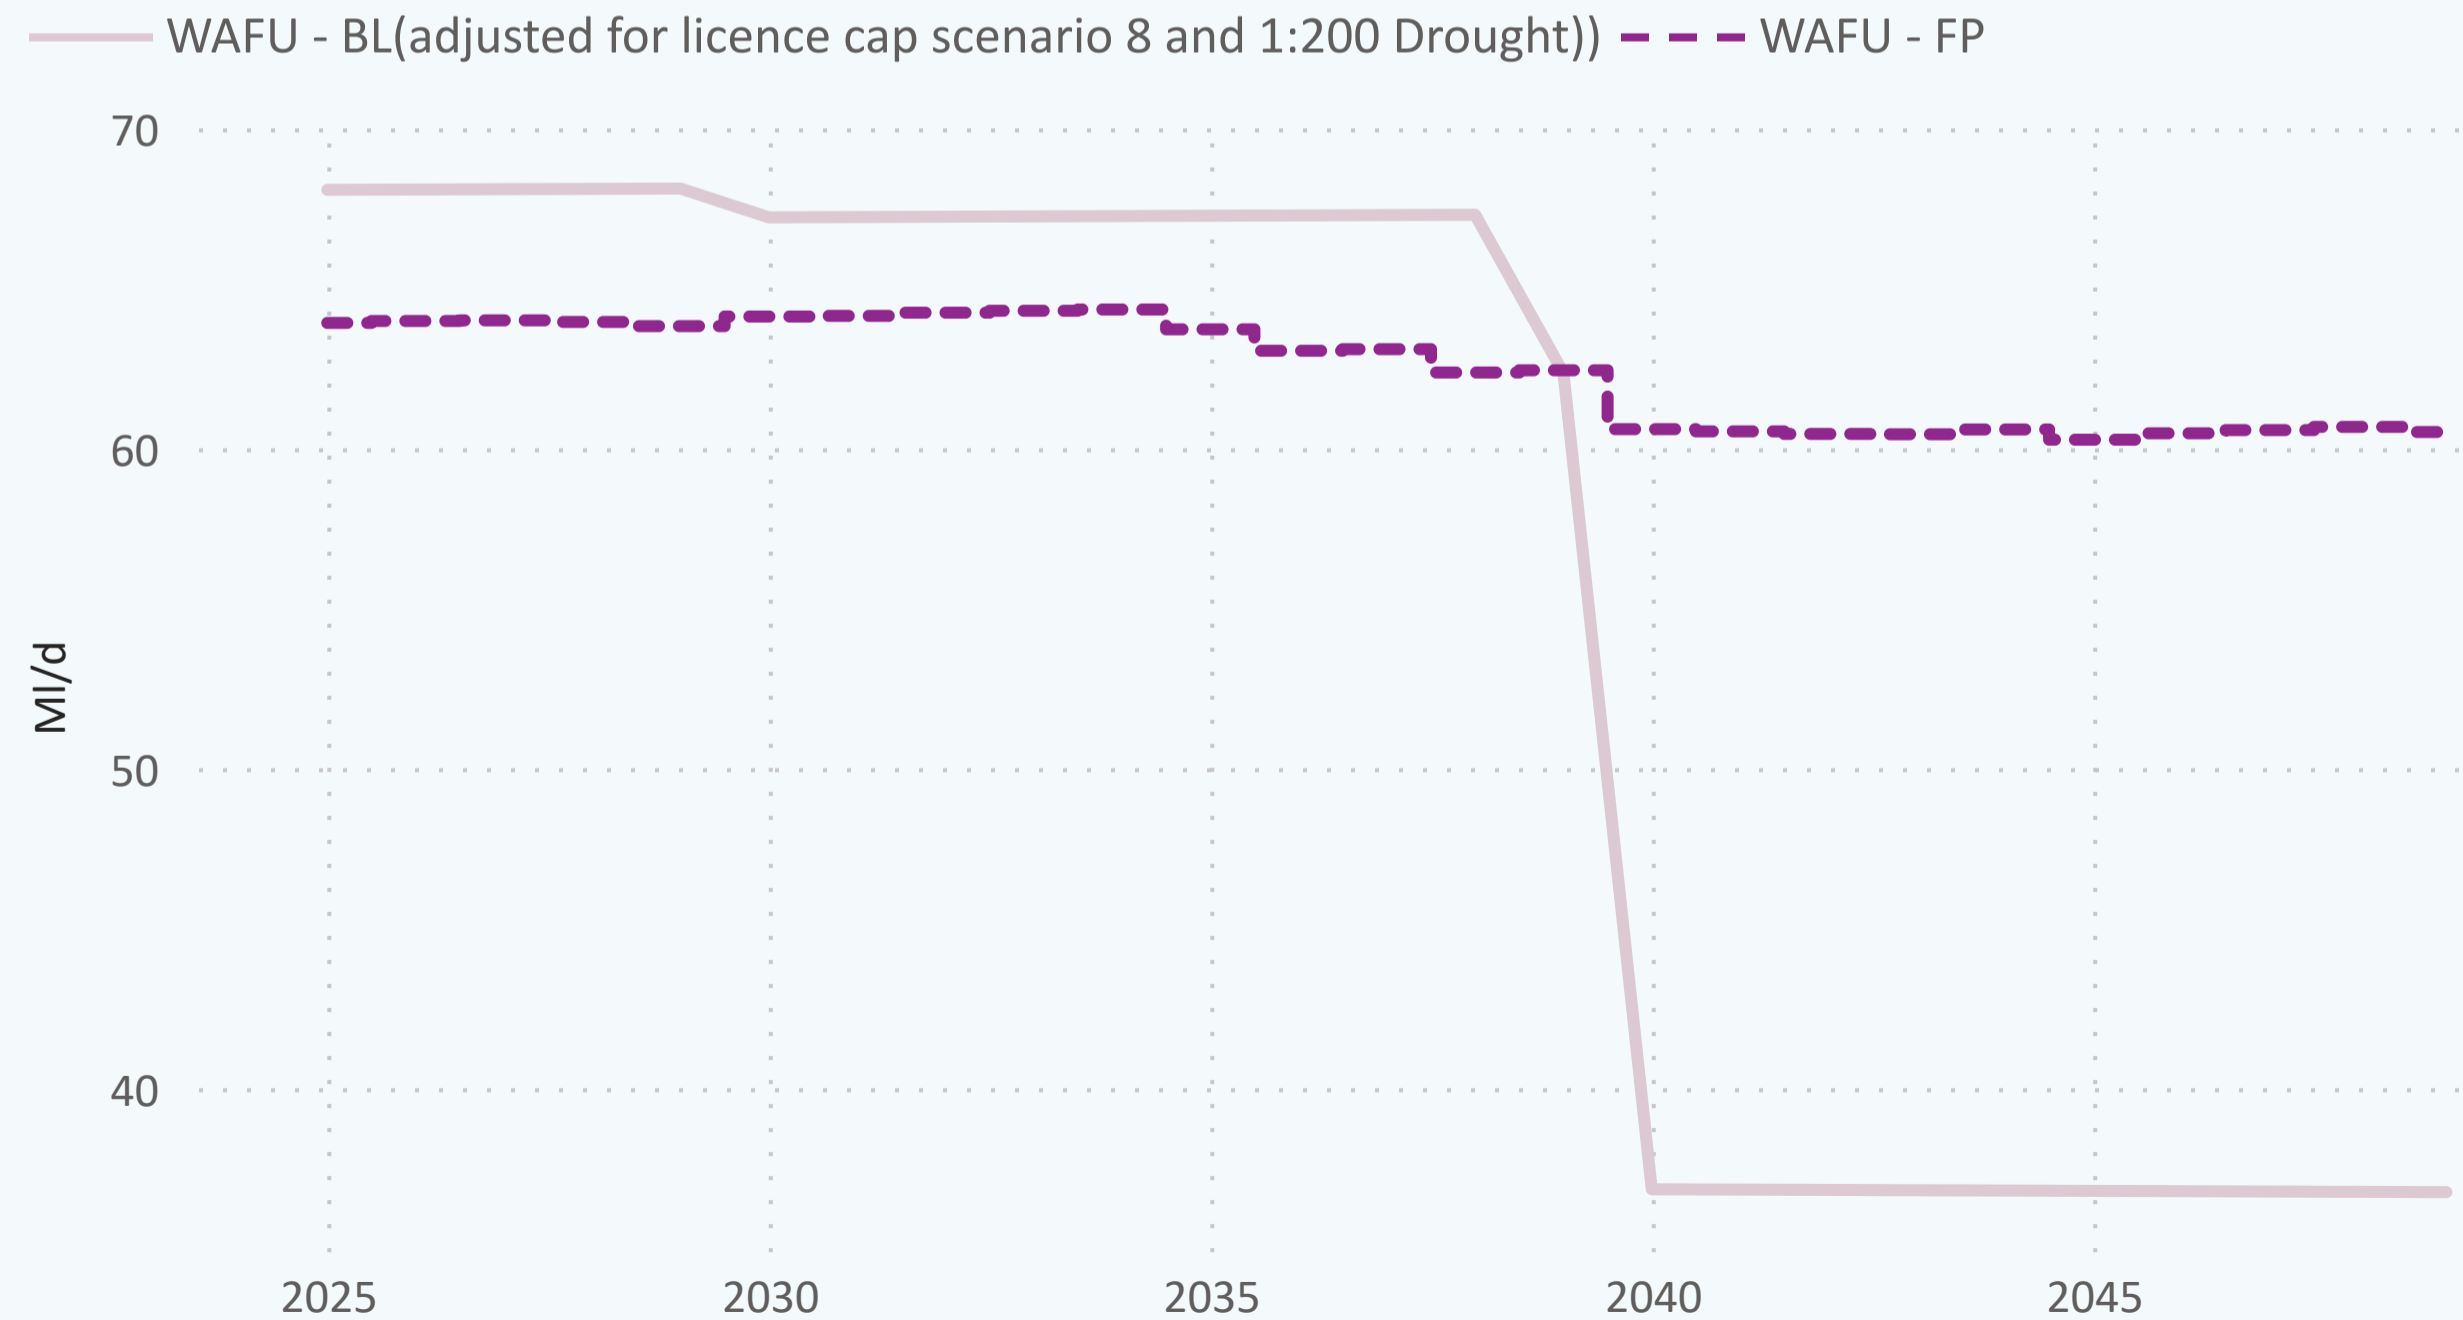

**Table 11b: Preferred supply side options**

Option ID	First Option Name
DA01	Adjustment to 1:200 drought
EE01	Adjustment to existing potable water export
EI02	Adjustment to existing potable water import
EXS10	Holland on Sea desalination (seawater) 26 MI/d
EXS19	Colchester WRC direct to Ardleigh Reservoir (no additional treatment)
EXS7	Essex South WTW Backwash water recovery
LC01	Adjustment for Licence cap scenario 8
OPI2	AMP8 OPI Adjustment






# 12. Non-Household consumption

Essex South



Essex South


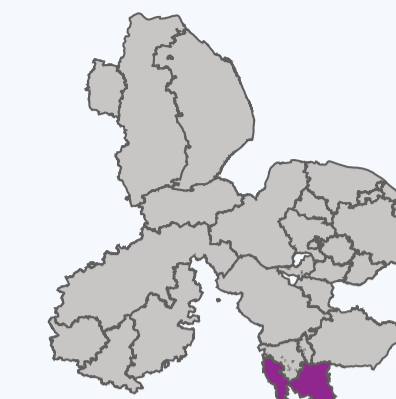


## 12.1 Non-Household demand Essex South

In 2025, 10.8 MI/d of Non-Household demand (measured and unmeasured) is expected. In 2049 it is expected to be 10.2 MI/d, which is a -5.46% change between the years.

Figure 12: % Non-Household modelled sectors within resource zone

Figure 11: Non-Household demand forecast 2025-2050

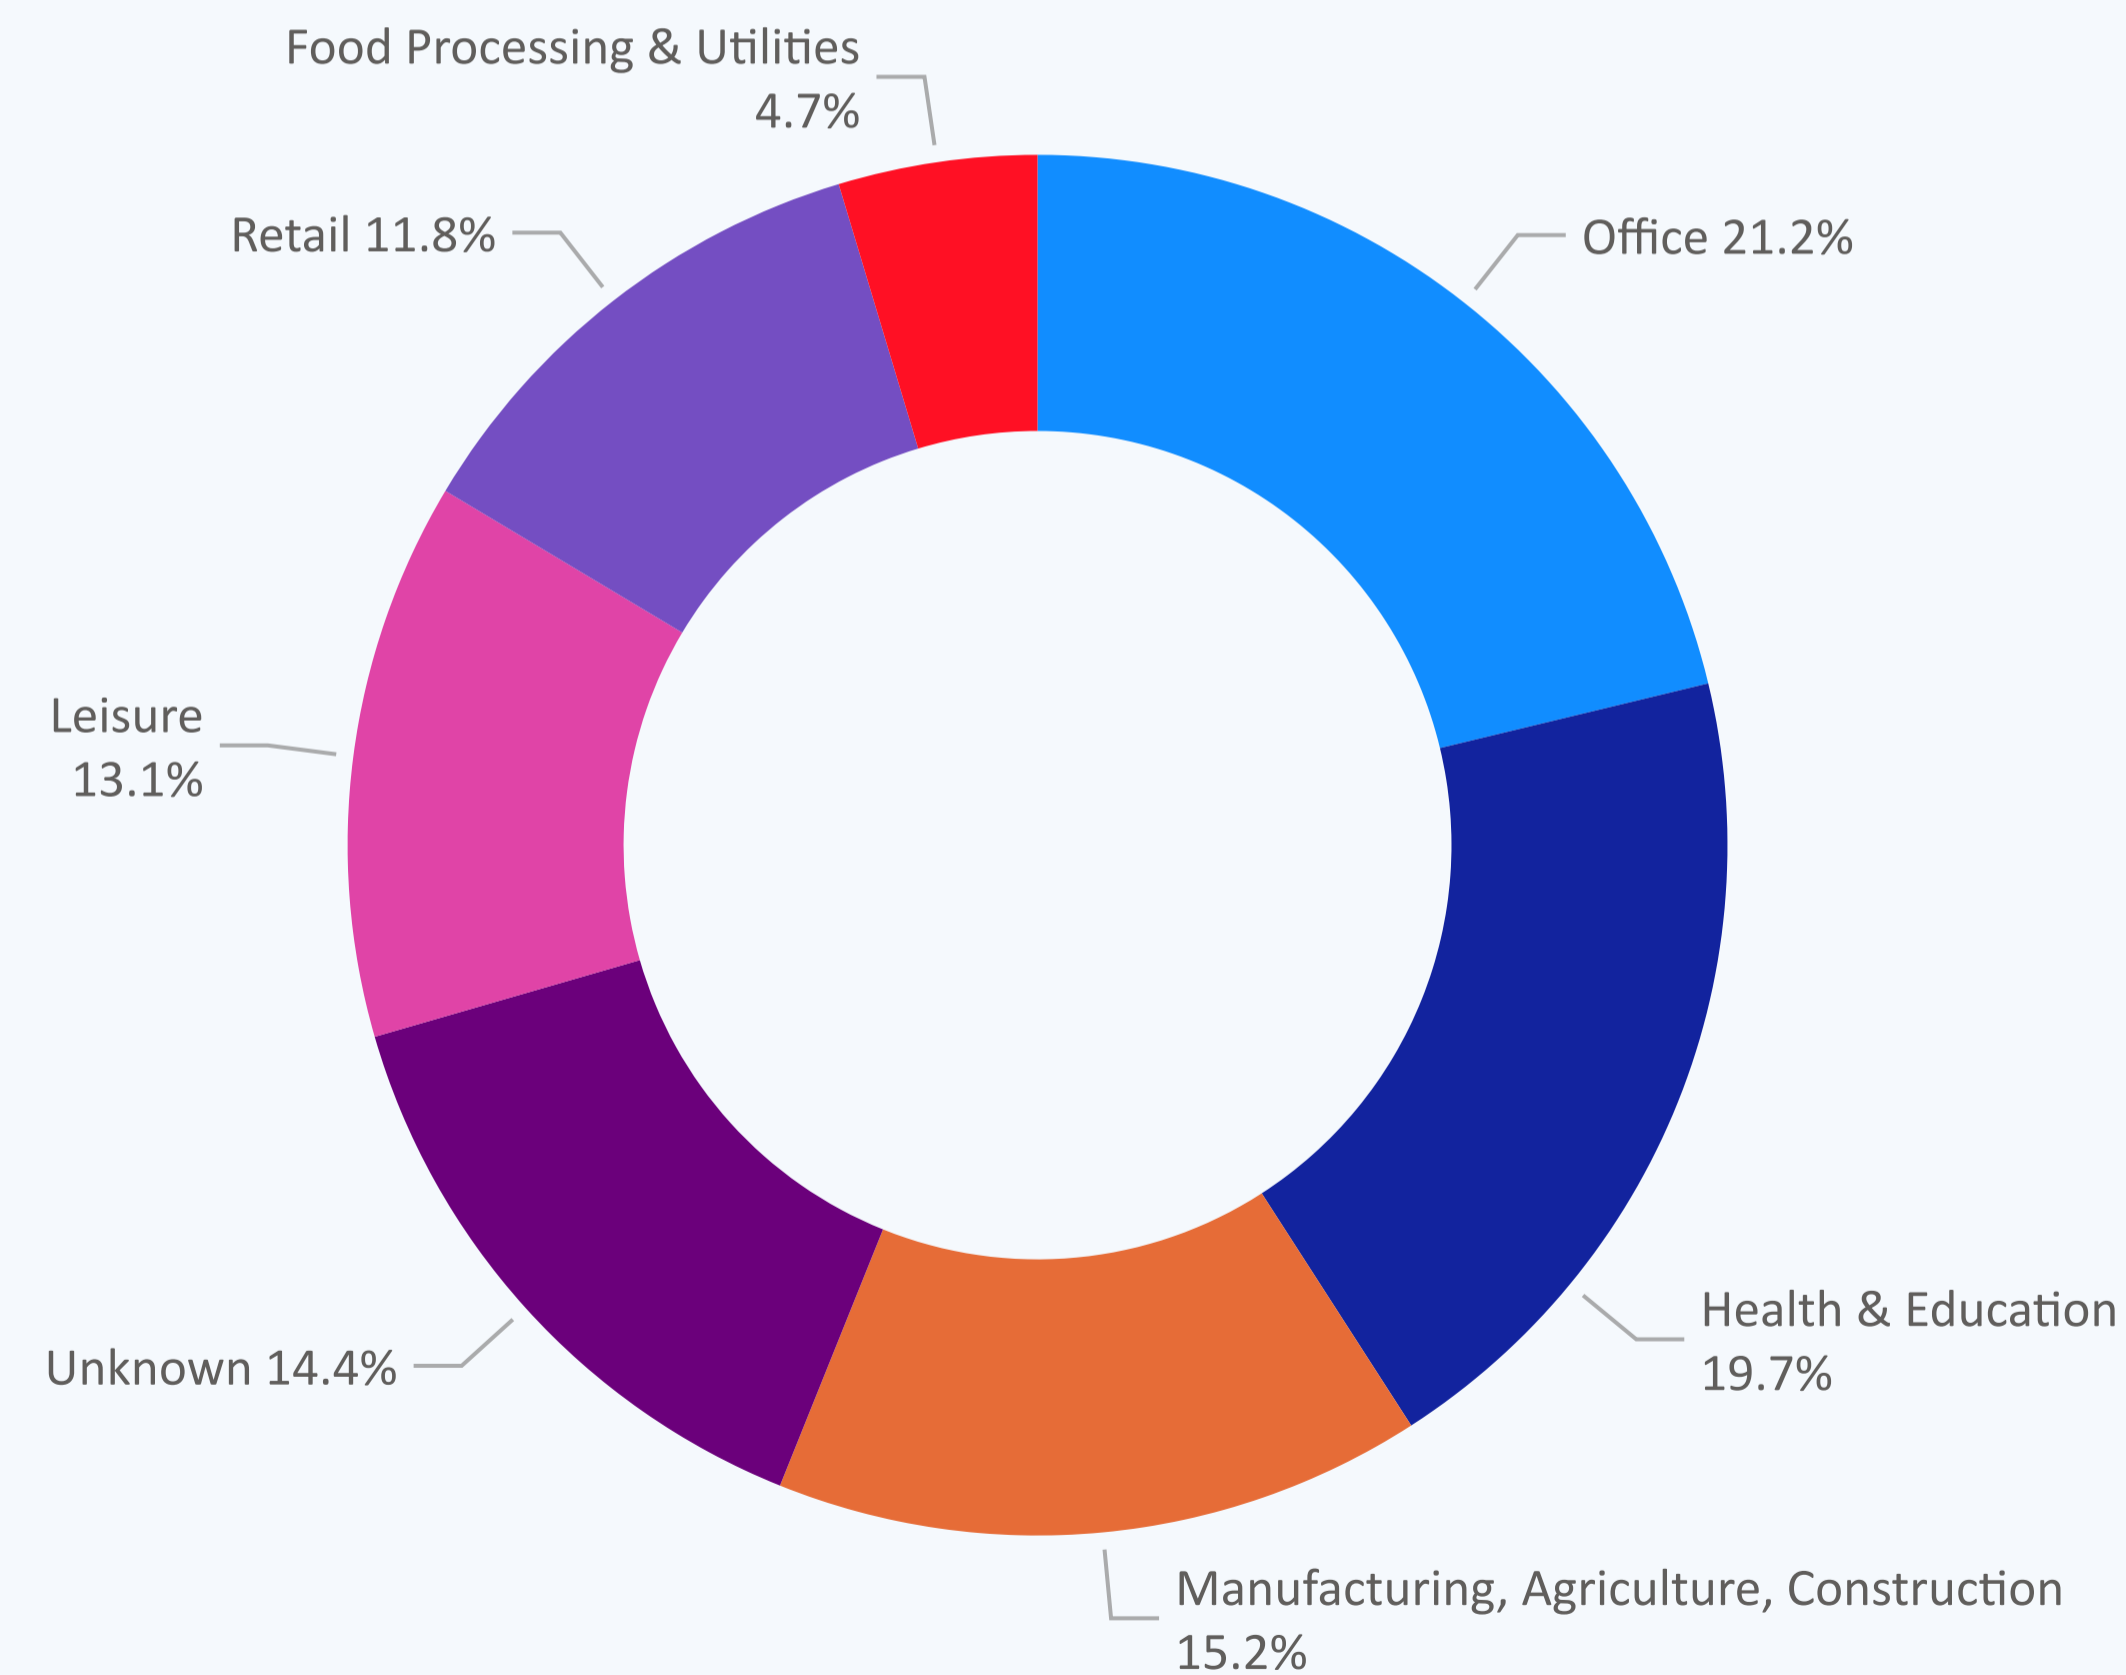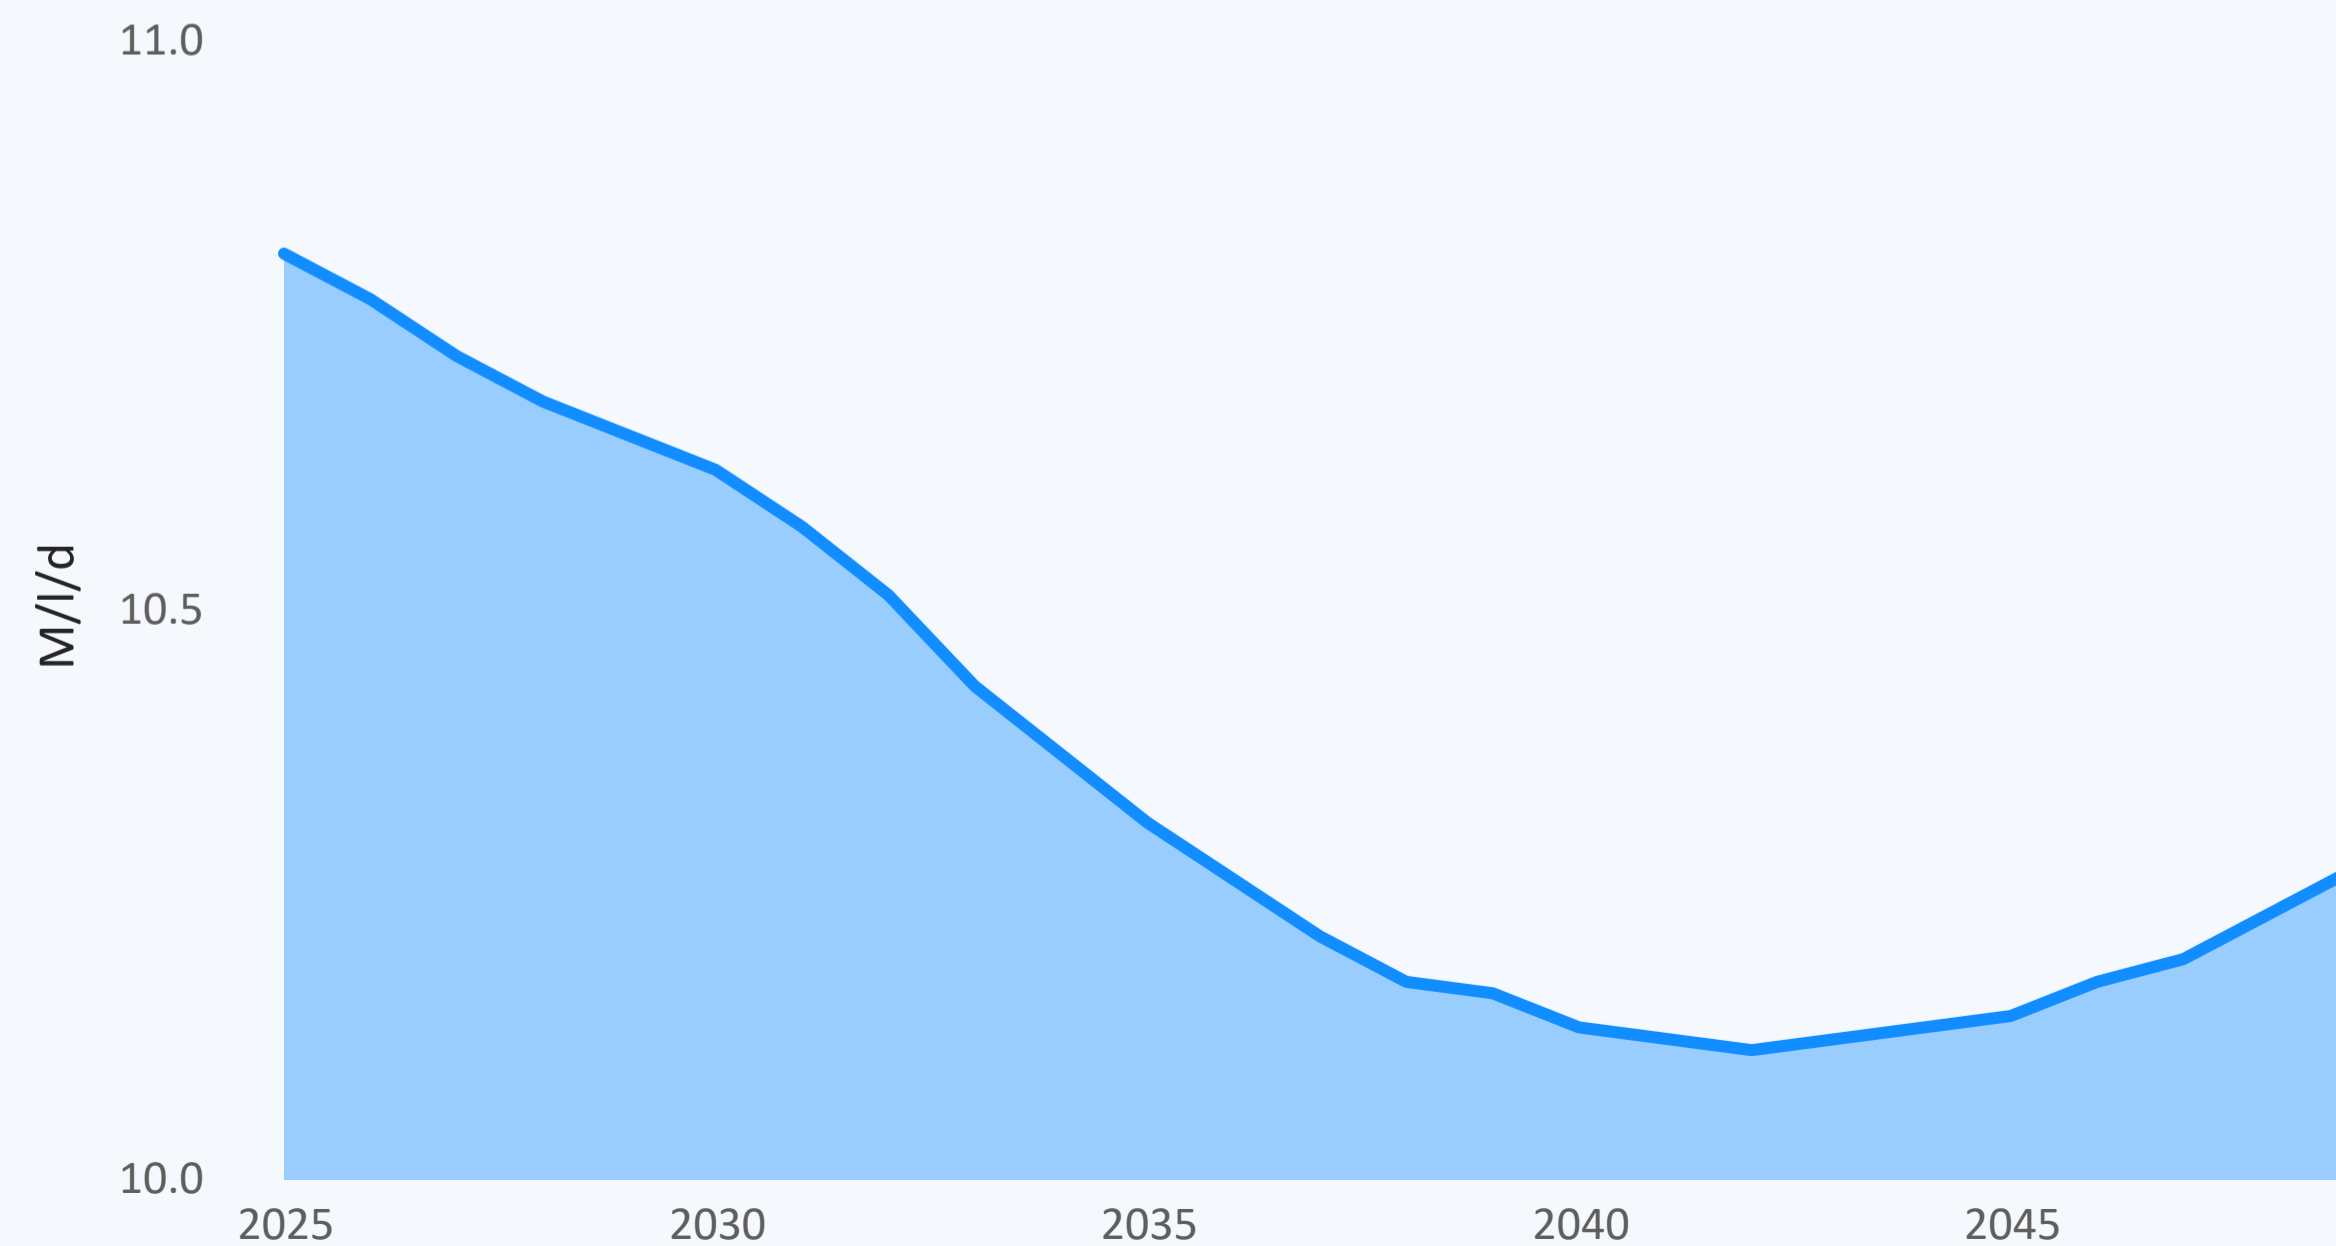

### 3. Deployable Output summary DYAA

#### Suffolk East



#### 3.1 Resource Zone geography: Suffolk East:

The East Suffolk WRZ covers an area of 1241 sq. km. The East Suffolk WRZ extends inland from Stour, Orwell and Deben estuaries and includes the supply systems for Ipswich, Felixstowe, Hadleigh, Stowmarket and Woodbridge. Supplies in the WRZ are obtained from a combination of sources that include groundwater abstracted from the Suffolk and Essex Chalk aquifers and surface water which is pumped from the River Gipping into Alton Water reservoir.

#### 3.2

Baseline deployable output (including 1:500 drought): *68.7 MI/d*

##### Deployable output reductions

Restoring sustainable abstraction (recent actual average): *-4.3 MI/d*

Reductions to achieve environmental destination (BAU+): *-14.3 MI/d* by 2040.

Climate change: *-0.2 MI/d* by 2050.

Baseline deployable output reduces by a total of *-18.7 MI/d* by 2050 a reduction of 27.3%.


**Table 3: supply characteristics (all values are MI/d)**

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
DO pre forecast changes	68.7	68.7	68.7	68.7	68.7
Change in DO due to climate change	-0.2	-0.2	-0.2	-0.2	-0.2
DO reductions to restore sustainable abstraction	-4.3	-4.3	-4.3	-4.3	-4.3
DO reductions for Environmental Destination	0.0	0.0	0.0	-14.3	-14.3
Change in DO from drought measures	0.0	0.0	0.0	0.0	0.0
<b>Final DO</b>	<b>64.3</b>	<b>64.2</b>	<b>64.2</b>	<b>50.0</b>	<b>49.9</b>
Raw water losses (-ve)	-2.9	-2.9	-2.9	-2.9	-2.9
Outage Allowance (-ve)	-0.4	-0.4	-0.4	-0.4	-0.4
<b>WAFU (own sources)</b>	<b>60.9</b>	<b>60.9</b>	<b>60.9</b>	<b>46.7</b>	<b>46.6</b>
Net Transfers	4.7	6.3	4.3	18.0	17.7
Other benefits	6.14	3.75	1.87	1.87	1.87
<b>Total Water Available for Use</b>	<b>71.8</b>	<b>71.0</b>	<b>67.1</b>	<b>66.6</b>	<b>66.2</b>

**3.3** The baseline Deployable Output data presented in this section represents the Environment Agency's preferred sustainability reduction licence cap scenario. This includes recent actual average caps to time limited licences in 2022-24 and caps to all other permanent licences by 2030. The impact of 1:500 drought resilience has also been applied from 2025 rather than the preferred scenario of 2039/2040. These factors apply to the baseline forecast only. For the final plan forecast we have applied our best value scenario for licence caps, which was developed following an iterative process to deliver licence caps as early as possible. The transition to 1:500 drought resilience occurs in 2039/40 in the final plan forecast. Further information is available in the WRMP24 Decision Making technical supporting document, section 6.



# 4. Population & Housing

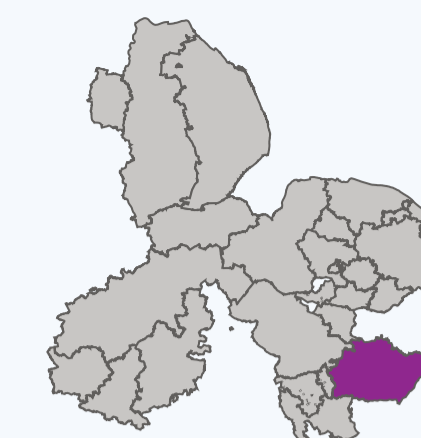


## Suffolk East

4.1 Over the WRMP period, population in **Suffolk East** is set to increase from **339160** in 2025 to **377823** in 2049-50 - this is an increase of **11.4 %** over the 25 years.

Table 4a: Population totals (cumulative) by AMP

Year	Total Population (000s)
2029-30 (end of AMP8)	348.913
2034-35 (end of AMP9)	355.814
2039-40 (end of AMP10)	361.134
2044-45 (end of AMP11)	369.297
2049-50 (end of AMP12)	377.823

Figure 2: Total Resource Zone Population

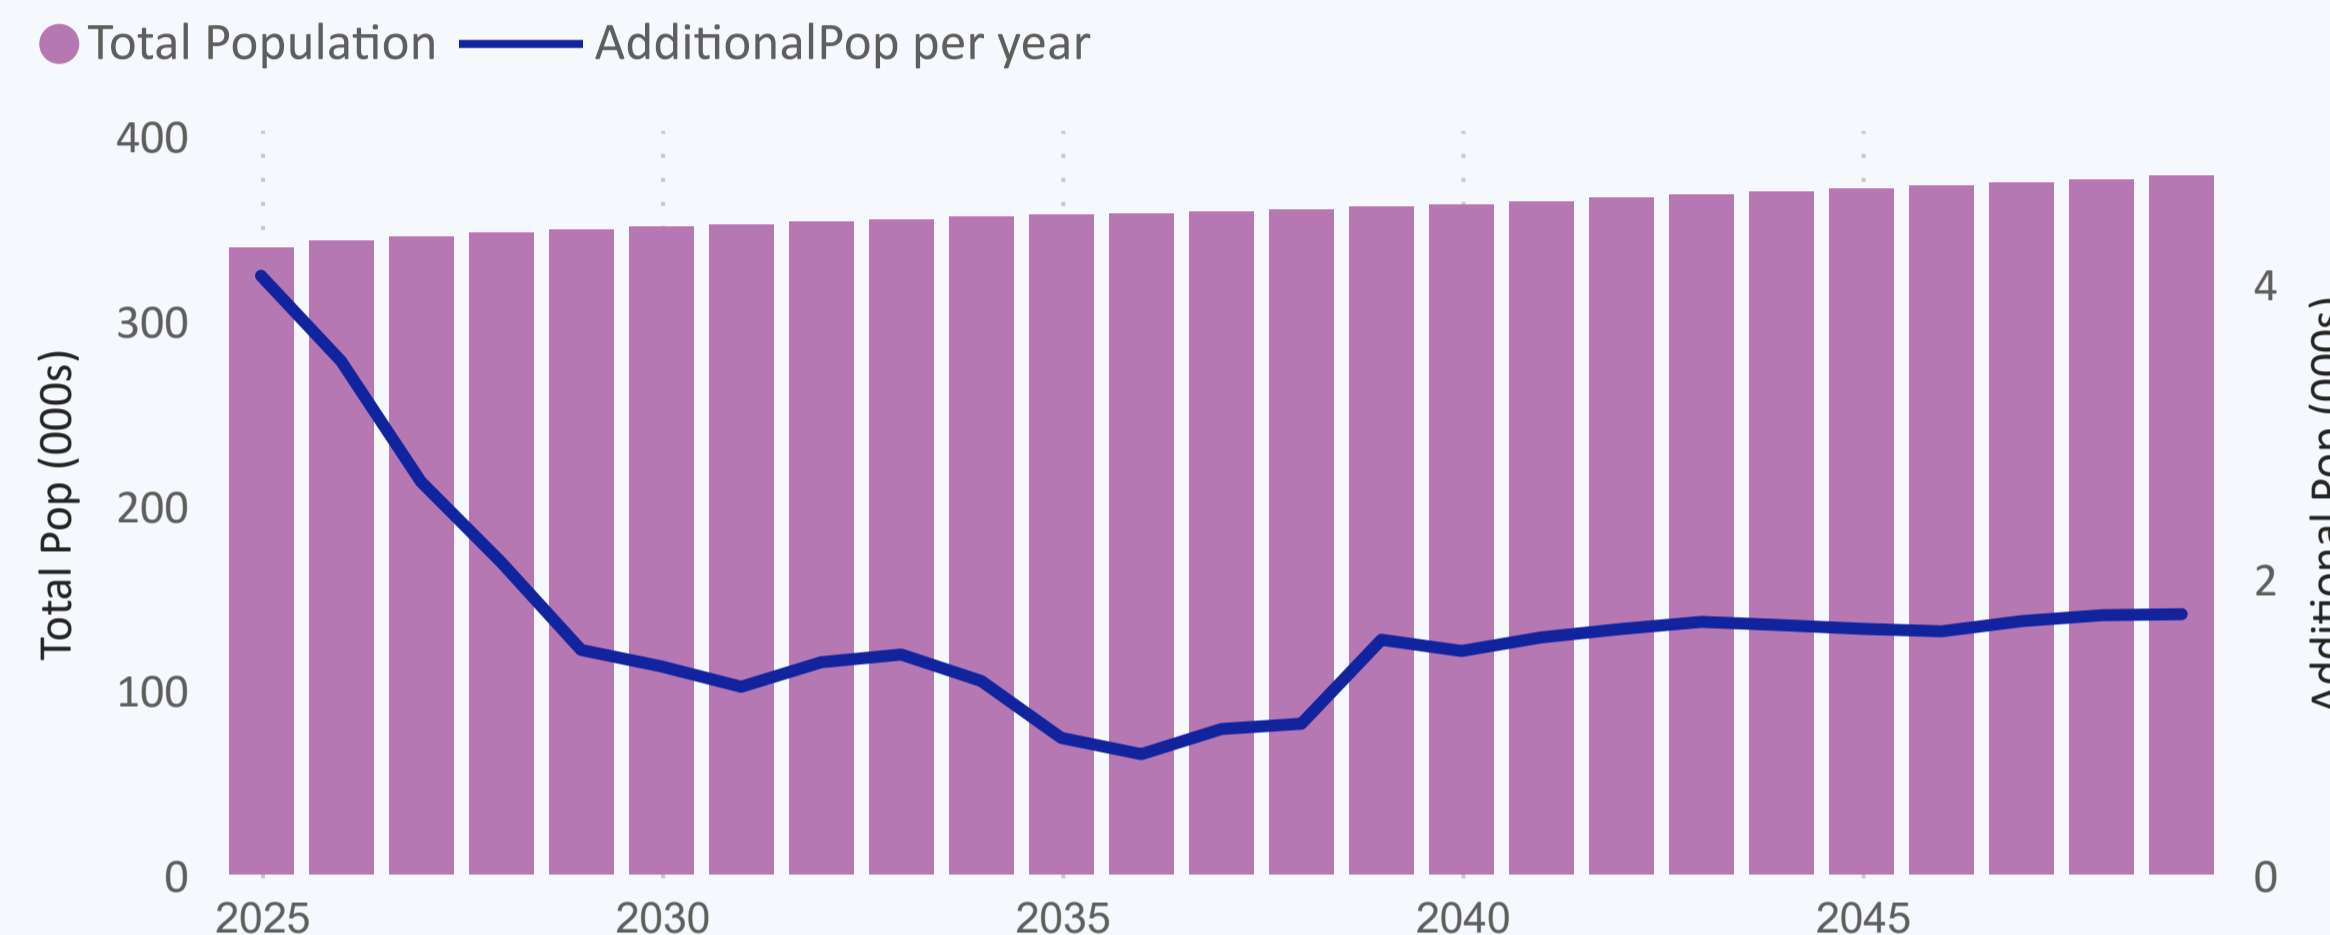


4.2 Over the WRMP period, property numbers in **Suffolk East** are set to increase from **144263** in 2025 to **170565** in 2049-50 - this is an increase of **18.2 %** over the 25 years.

Table 4b: Property totals (cumulative) by AMP

Year	Total Properties-excl voids (000s)
2029-30 (end of AMP8)	150.956
2034-35 (end of AMP9)	157.058
2039-40 (end of AMP10)	161.768
2044-45 (end of AMP11)	166.272
2049-50 (end of AMP12)	170.565

Figure 3: Total Resource Zone Properties (excl. voids)

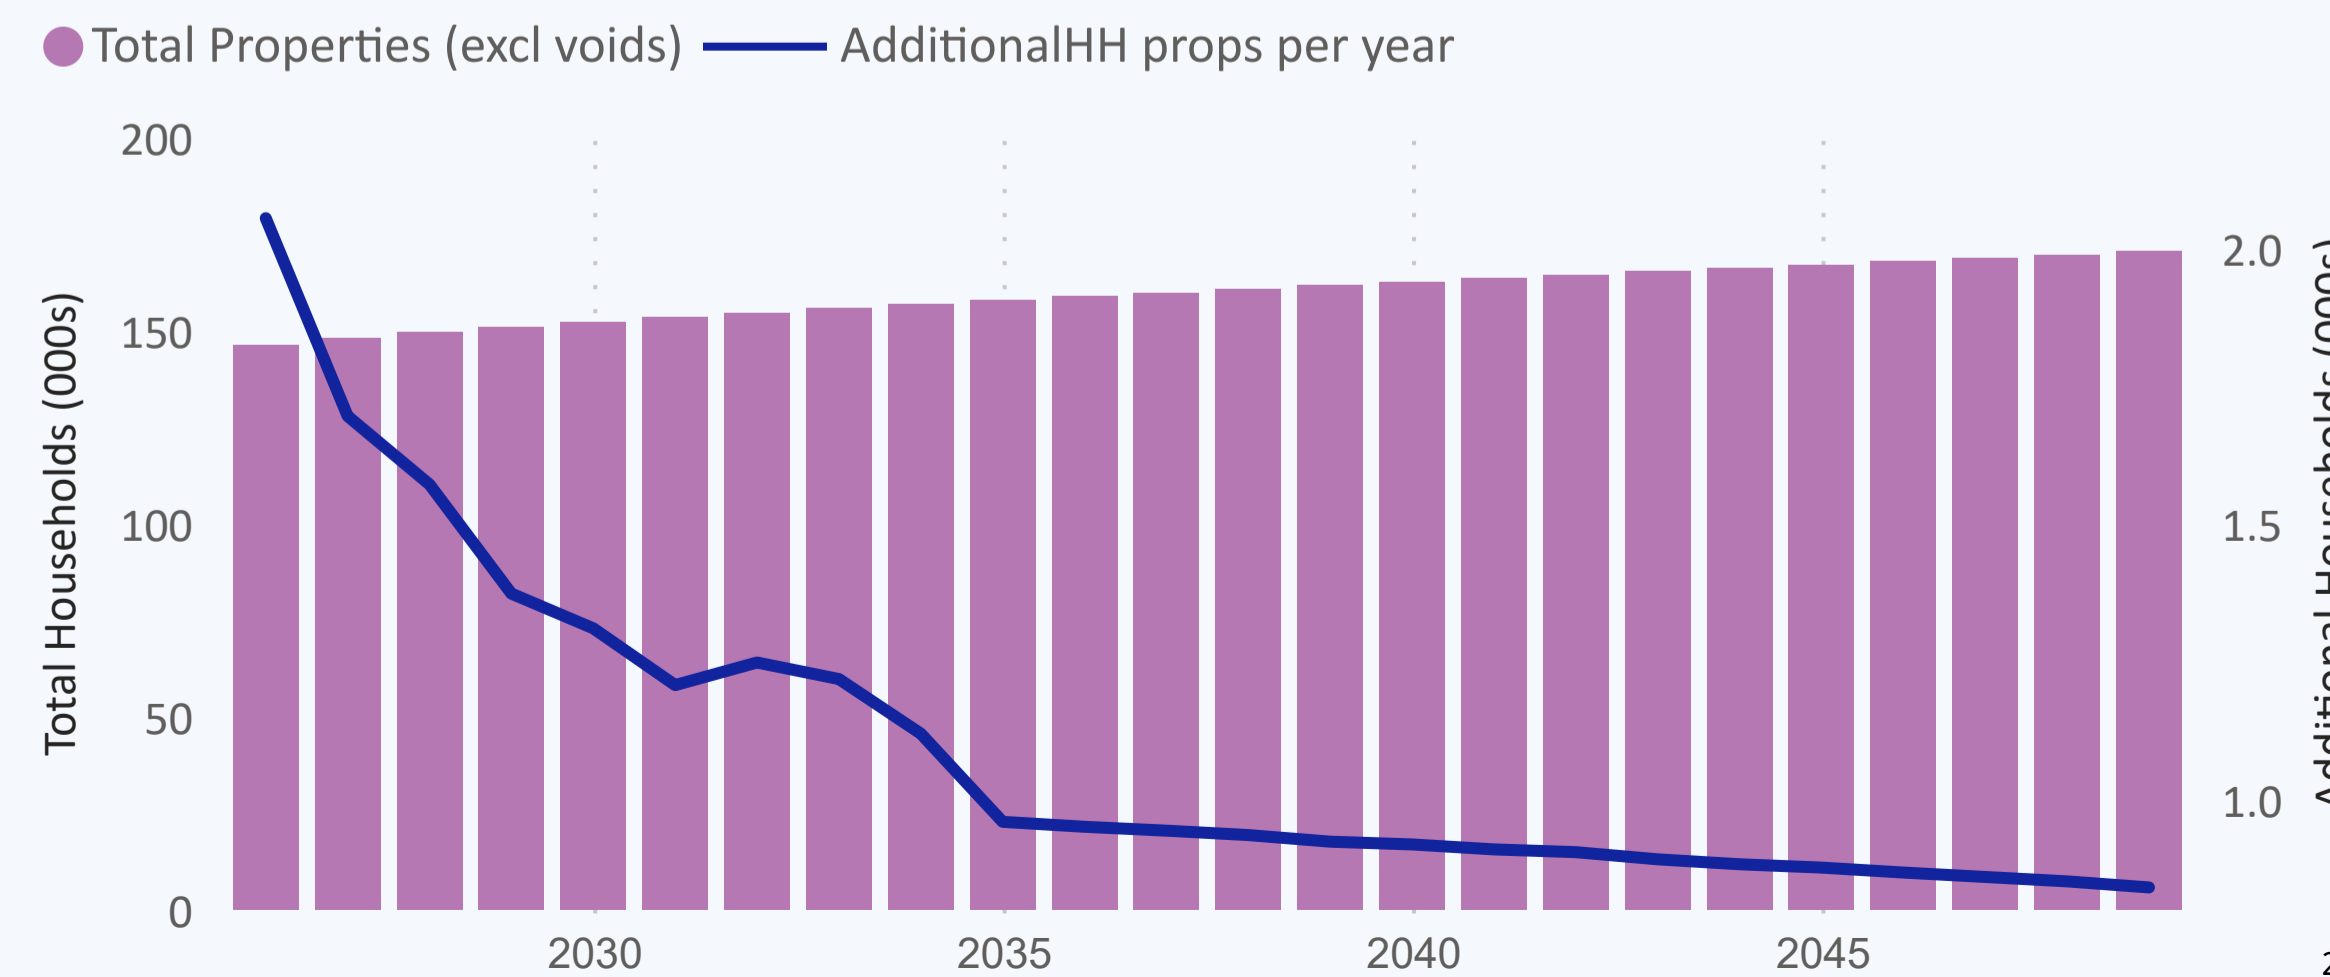

# 5. Baseline Supply Demand Balance DYAA

Suffolk East

Suffolk East

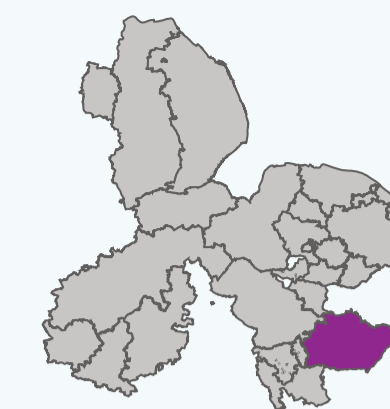


Figure 4: Suffolk East baseline supply demand balance to 2050 for Dry Year Annual Average conditions

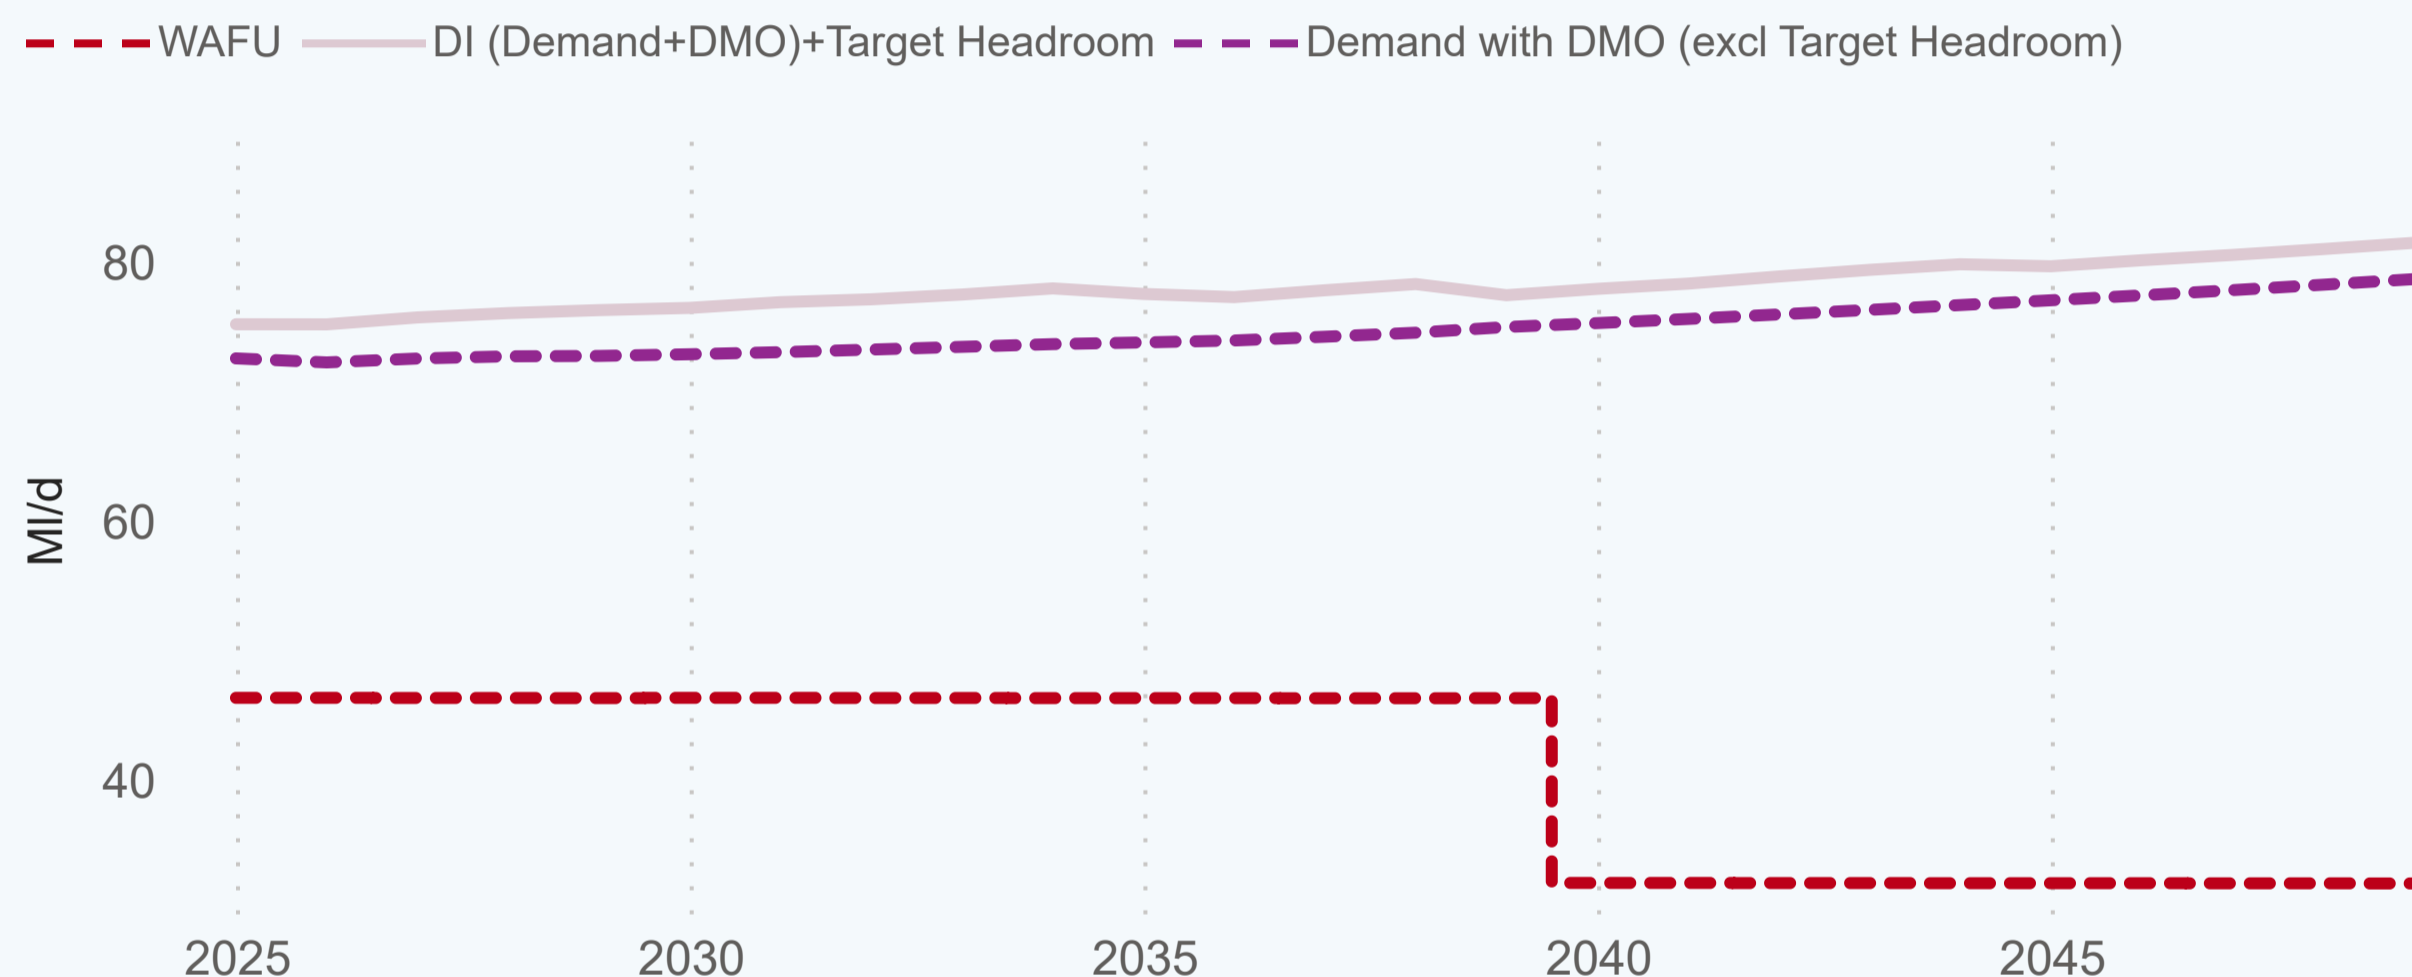


Table 5a: Baseline supply demand balance 2025 - 2050 for DYAA conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	61.0	60.9	60.9	60.9	46.7	46.6
Net Transfers	-14.6	-14.6	-14.6	-14.6	-14.6	-14.6
Total Water Available For Use	46.4	46.4	46.4	46.4	32.1	32.1
Distribution Input	72.6	72.7	73.7	75.0	76.7	78.7
Target Headroom	2.6	3.5	4.3	2.5	3.1	2.8
Supply Demand Balance	-28.8	-29.9	-31.6	-31.1	-47.7	-49.4

Table 5b: Baseline demand forecast (without preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	40.6	42.4	44.2	46.2	47.9	49.4
Water delivered unmeasured household	7.0	5.9	4.9	4.0	3.3	3.0
Total Leakage	9.3	9.3	9.4	9.4	9.4	9.5
Water delivered measured non-household	16.2	15.6	15.7	15.9	16.5	17.3
Water delivered unmeasured non-household	0.1	0.1	0.1	0.1	0.1	0.1
Distribution Input	72.6	72.7	73.7	75.0	76.7	78.7

## 5.1 DYAA BL supply demand summary: Suffolk East

Baseline Supply Demand Balance: This zone will go into deficit immediately (under the preferred baseline scenario - as described in section 3.3).

- Demand Forecast: Baseline household demand (measured and unmeasured) is forecast to change from 47.5 MI/d in 2025 to 52.4 MI/d in 2050, a percentage change of 10.3 %.
- Baseline Leakage: is forecast to change from 9.3 MI/d in 2025 to 9.5 MI/d by 2050.
- Baseline Non-Household demand: is expected to change from 16.2 MI/d to 17.3 MI/d.
- Baseline Distribution Input: is expected to change from 72.6 MI/d to 78.7 MI/d by 2050.

Nb. 'Deficit' is one outcome of the calculation WAFU minus Distribution Input (including Target Headroom).



# 6. Baseline Supply Demand Balance DYCP

Suffolk East

Suffolk East



Figure 5: Suffolk East baseline supply demand balance to 2050 for Dry Year Critical Period conditions

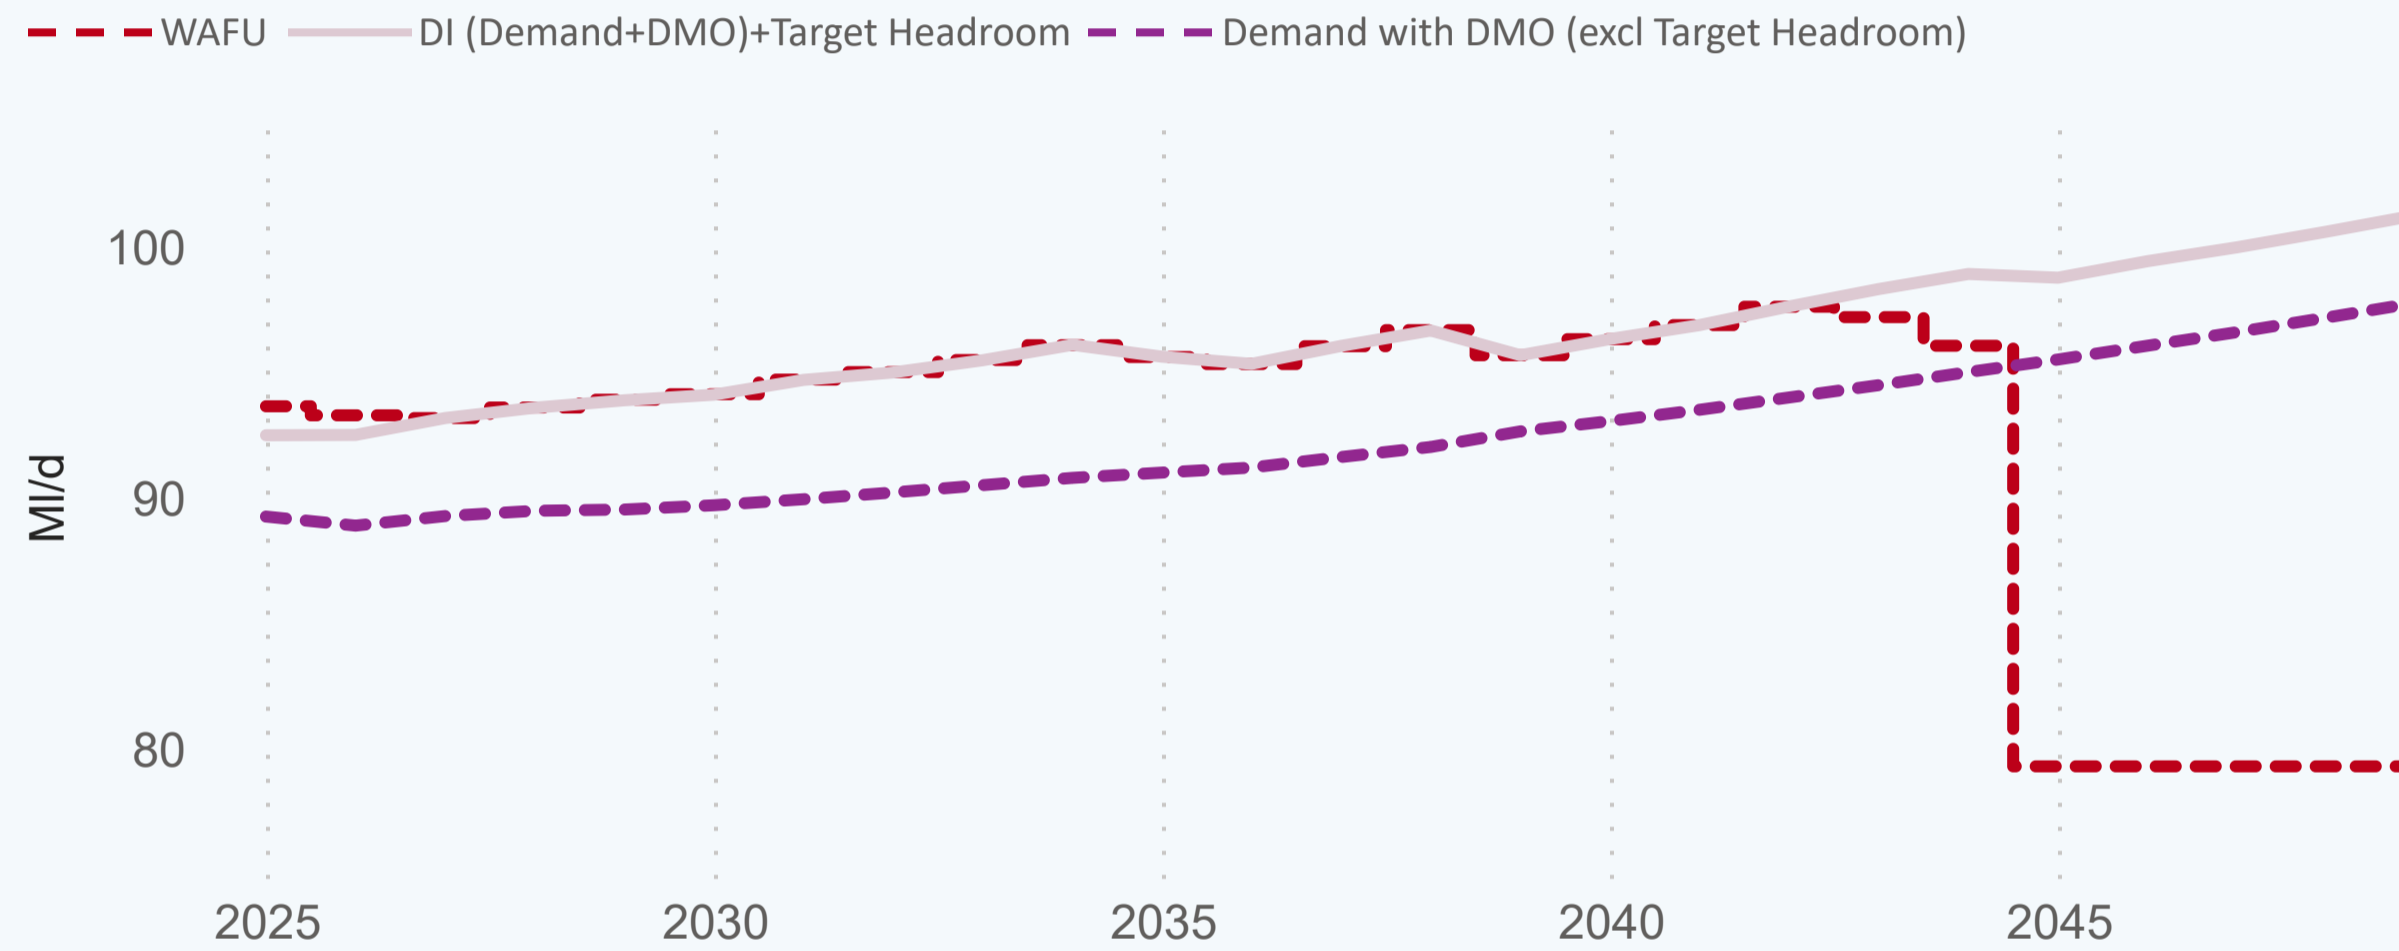


Table 6b: Baseline demand forecast with DYCP conditions (without preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	51.3	53.7	56.2	58.8	61.4	63.4
Water delivered unmeasured household	9.2	7.8	6.4	5.3	4.4	4.1
Total Leakage	9.3	9.3	9.4	9.4	9.4	9.5
Water delivered measured non-household	19.9	19.2	19.3	19.6	20.3	21.3
Water delivered unmeasured non-household	0.1	0.1	0.1	0.1	0.1	0.1
Distribution Input	89.3	89.5	90.8	92.7	95.0	97.8

Table 6a: Baseline supply demand balance 2025 - 2050 for DYCP conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	96.1	96.1	96.1	96.1	96.1	93.9
Net Transfers	-2.5	-2.2	0.0	-0.4	-0.1	-14.6
Total Water Available For Use	93.6	93.9	96.1	95.7	96.1	79.3
Distribution Input	89.3	89.5	90.8	92.7	95.0	97.8
Target Headroom	3.2	4.3	5.3	3.0	3.9	3.5
Supply Demand Balance	1.2	0.0	0.0	0.0	-2.9	-21.9

## 6.1 DYCP BL supply demand summary: Suffolk East


Baseline Supply Demand balance: This zone is expected to go into deficit by 2034

- Demand Forecast: Baseline household demand (measured and unmeasured) is forecast to change from 60.5 MI/d in 2025 to 67.5 MI/d in 2050, a percentage change of 11.6 %.
- Baseline Leakage: is forecast to change from 9.3 MI/d in 2025 to 9.5 MI/d by 2050.
- Baseline Non-Household demand: is expected to change from 19.9 MI/d to 21.3 MI/d.
- Baseline Distribution Input: is expected to change from 89.3 MI/d to 97.8 MI/d by 2050.


Nb. 'Deficit' is one outcome of the calculation WAFU minus Distribution Input (including Target Headroom).

# 7. Demand forecast and PCC

## Suffolk East

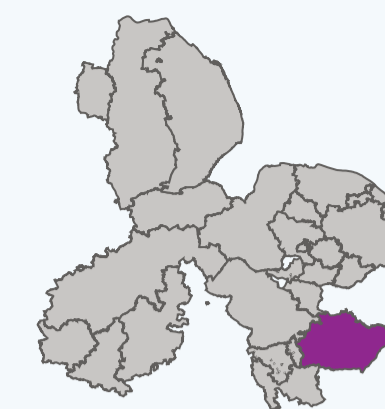

**Figure 6: Suffolk East DYAA DI with and without demand management strategy**

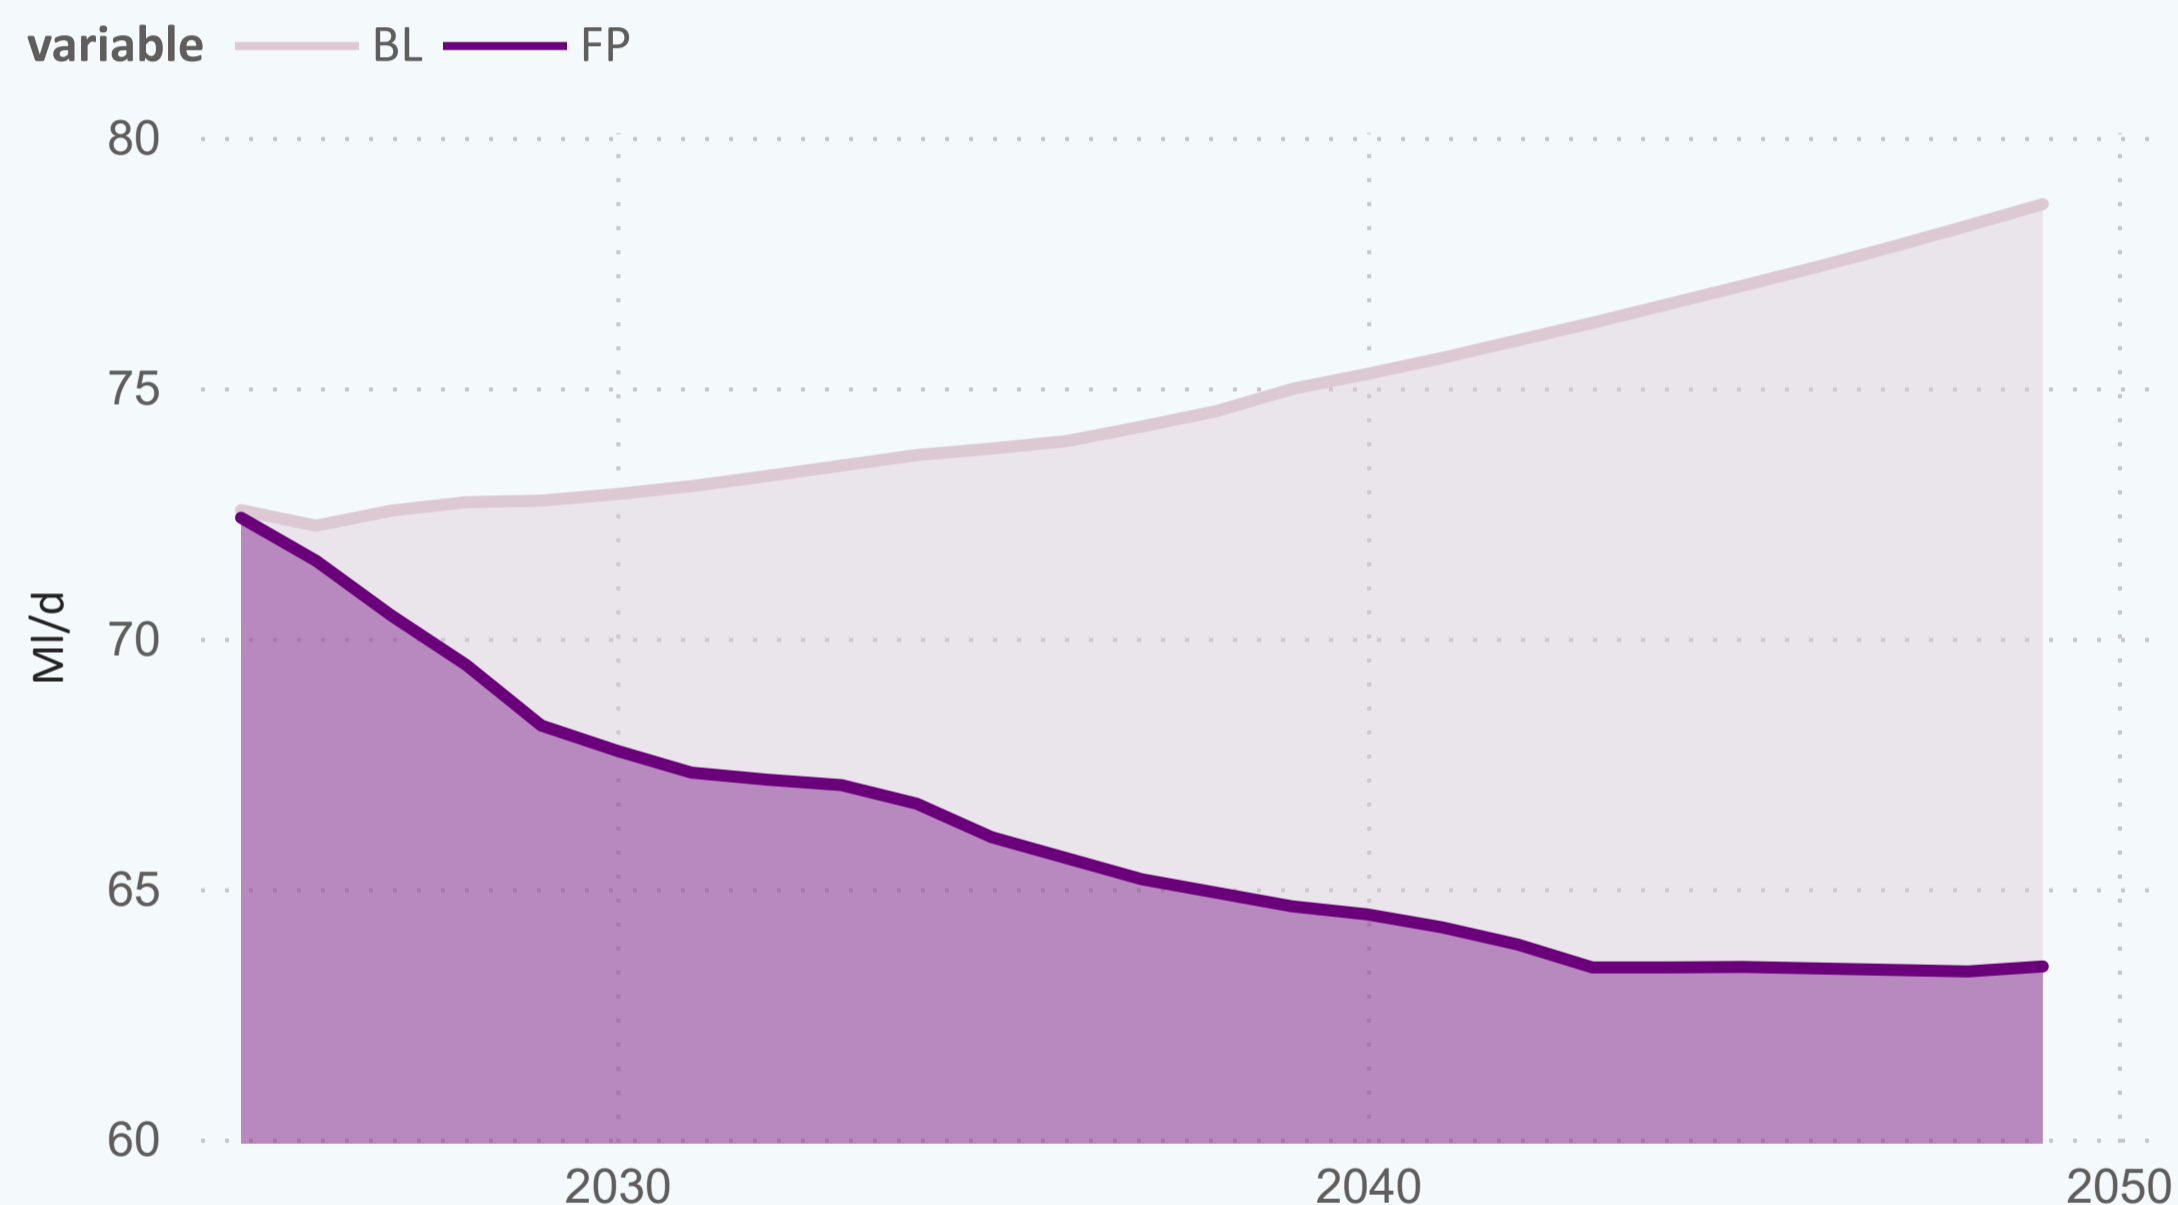

**Table 7a: Demand - baseline and final plan**

variable	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
BL	72.7	73.7	75.0	76.7	78.7
FP	68.3	66.7	64.6	63.4	63.4

### 7.2 Demand Suffolk East (see Table 7a)

Baseline demand is expected to increase from 72.6 (MI/d) in 2025 to 78.7 (MI/d) in 2050. With demand management options in place, demand is expected to be 63.4 (MI/d).

### 7.1 PCC Suffolk East (see Table 7b)

Per Capita Consumption (PCC) in the base year 2025/26 is 129.7 (l/h/d) measured and 157.2 (l/h/d) unmeasured.


The weighted average PCC (l/h/d) comes in at 133.0 (l/h/d) in 2025/26. This is forecast to fall to 107.5 (l/h/d) in the Final Plan forecast as demand management option savings are realised and customers switch from unmeasured to measured status

**Table 7b: DMO strategy Final Plan**

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
BL demand forecast(DYAA)	131.3	130.9	131.9	131.9	132.0
FP demand forecast(DYAA)	122.5	118.0	113.3	109.2	107.5
% change BL to FP	-6.7%	-9.9%	-14.1%	-17.2%	-18.5%

# 8. Demand management options

## Suffolk East

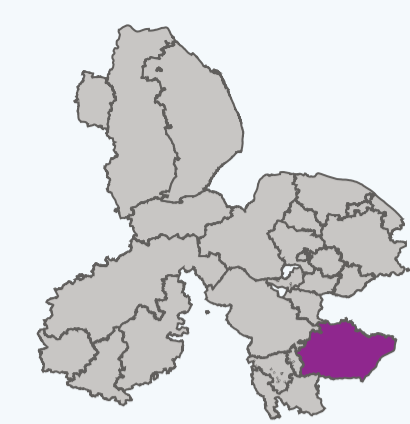

### 8.1 Regional overview:

Across the entirety of the Anglian Water region our demand management strategy will comprise three strongly interlinked programs:

#### Water metering program:

- We intend to complete our current smart meter rollout which will replace our entire meter stock over 10 years (2 AMPs), noting that 1.1M smart meters will be installed across Anglian Water by 2025. The information resulting from 'smart metering' will help inform our customers regarding their water usage and will assist in our ability to influence this behaviour. It will also help with our ability to detect leakage, significantly reducing plumbing losses and customer supply pipe leaks.

#### Leakage reduction

- Our aim is to reduce leakage by more than 45MI/d from 2025 to 2050 across the whole Anglian Water area, building upon our ambitious program of leakage reduction in AMP7 (14% reduction of more than 27MI/d across the region by 2025).

#### Water efficiency measures

- New technologies and interventions will help promote the careful use of water. Additional water efficiency programs will include: the promotion of 'Smart' devices; further development of our Multi-utility web-portal; garden advice; support for vulnerable customers with plumbing loss and cspl; Community reward schemes. As part of our revised draft WRMP24 we have developed and included 'water efficiency visits' and leakage reduction measures for our Non-Household customers.

Figure 7: DMO strategy Final Plan for Suffolk East

For full chart key see table below


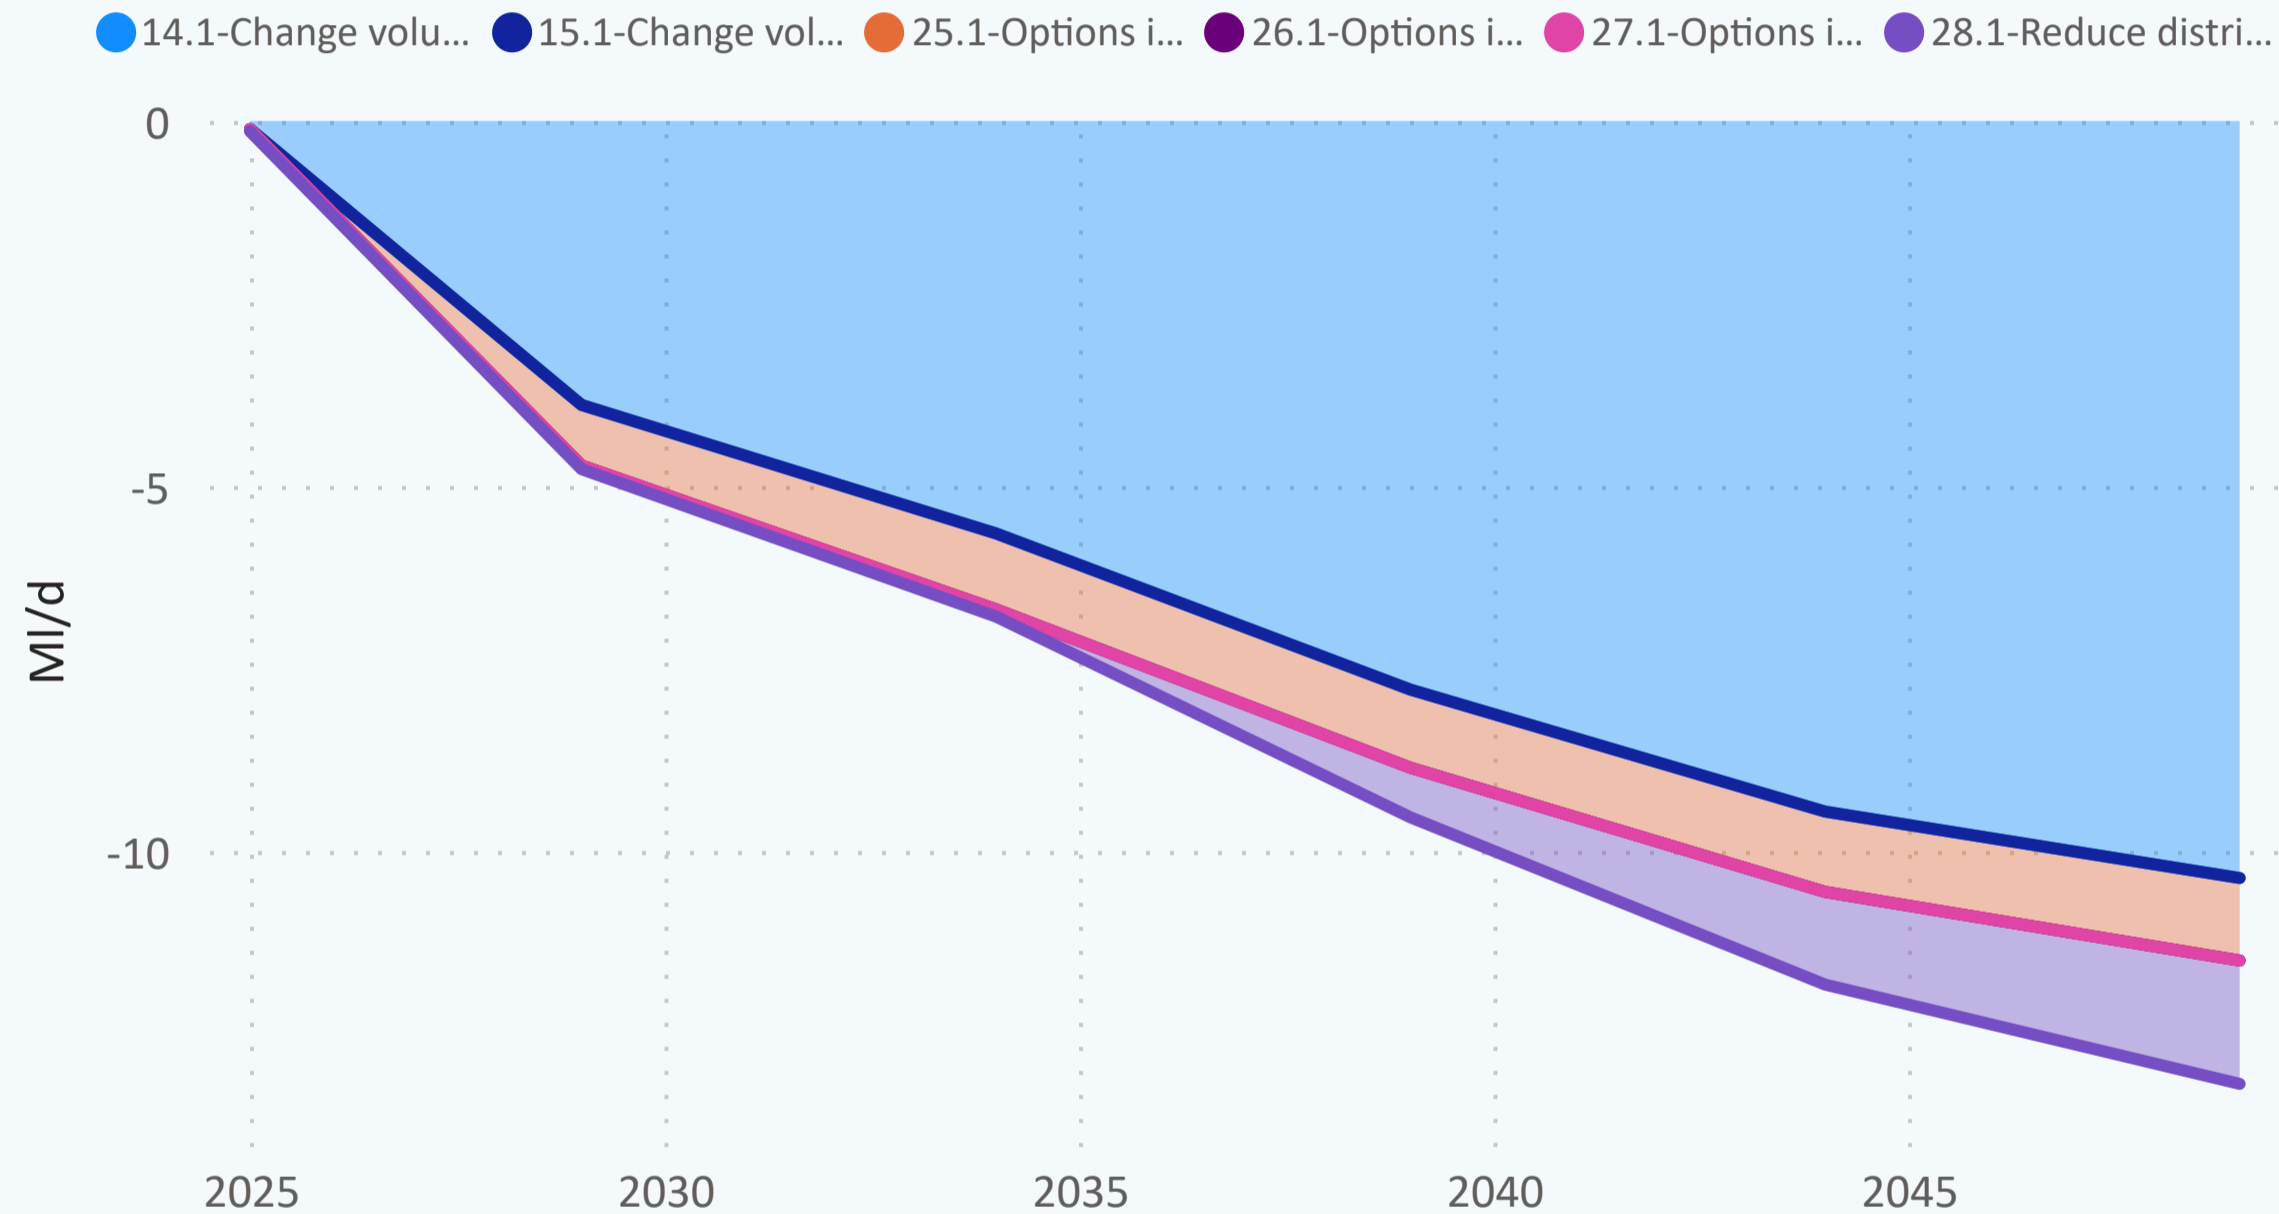


Table 8: DMO strategy Final Plan for Suffolk East

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
14.1-Change volume delivered to measured households( -ve)	-3.9	-5.7	-7.8	-9.5	-10.4
15.1-Change volume delivered to unmeasured households( -ve)	0.0	0.0	0.0	0.0	0.0
25.1-Options impacting on measured Household - USPL ( -ve)	-0.8	-1.0	-1.1	-1.1	-1.1
26.1-Options impacting on unmeasured Household - USPL (-ve)	0.0	0.0	0.0	0.0	0.0
27.1-Options impacting on Void properties - USPL (-ve)	0.0	0.0	0.0	0.0	0.0
28.1-Reduce distribution losses (-ve)	-0.1	-0.1	-0.7	-1.3	-1.7



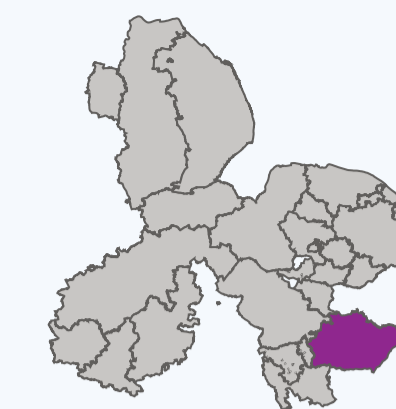

# 9. Final Plan Supply Demand Balance DYAA

## Suffolk East

Figure 8: Suffolk East final plan SDB to 2050 for Dry Year Annual Average conditions

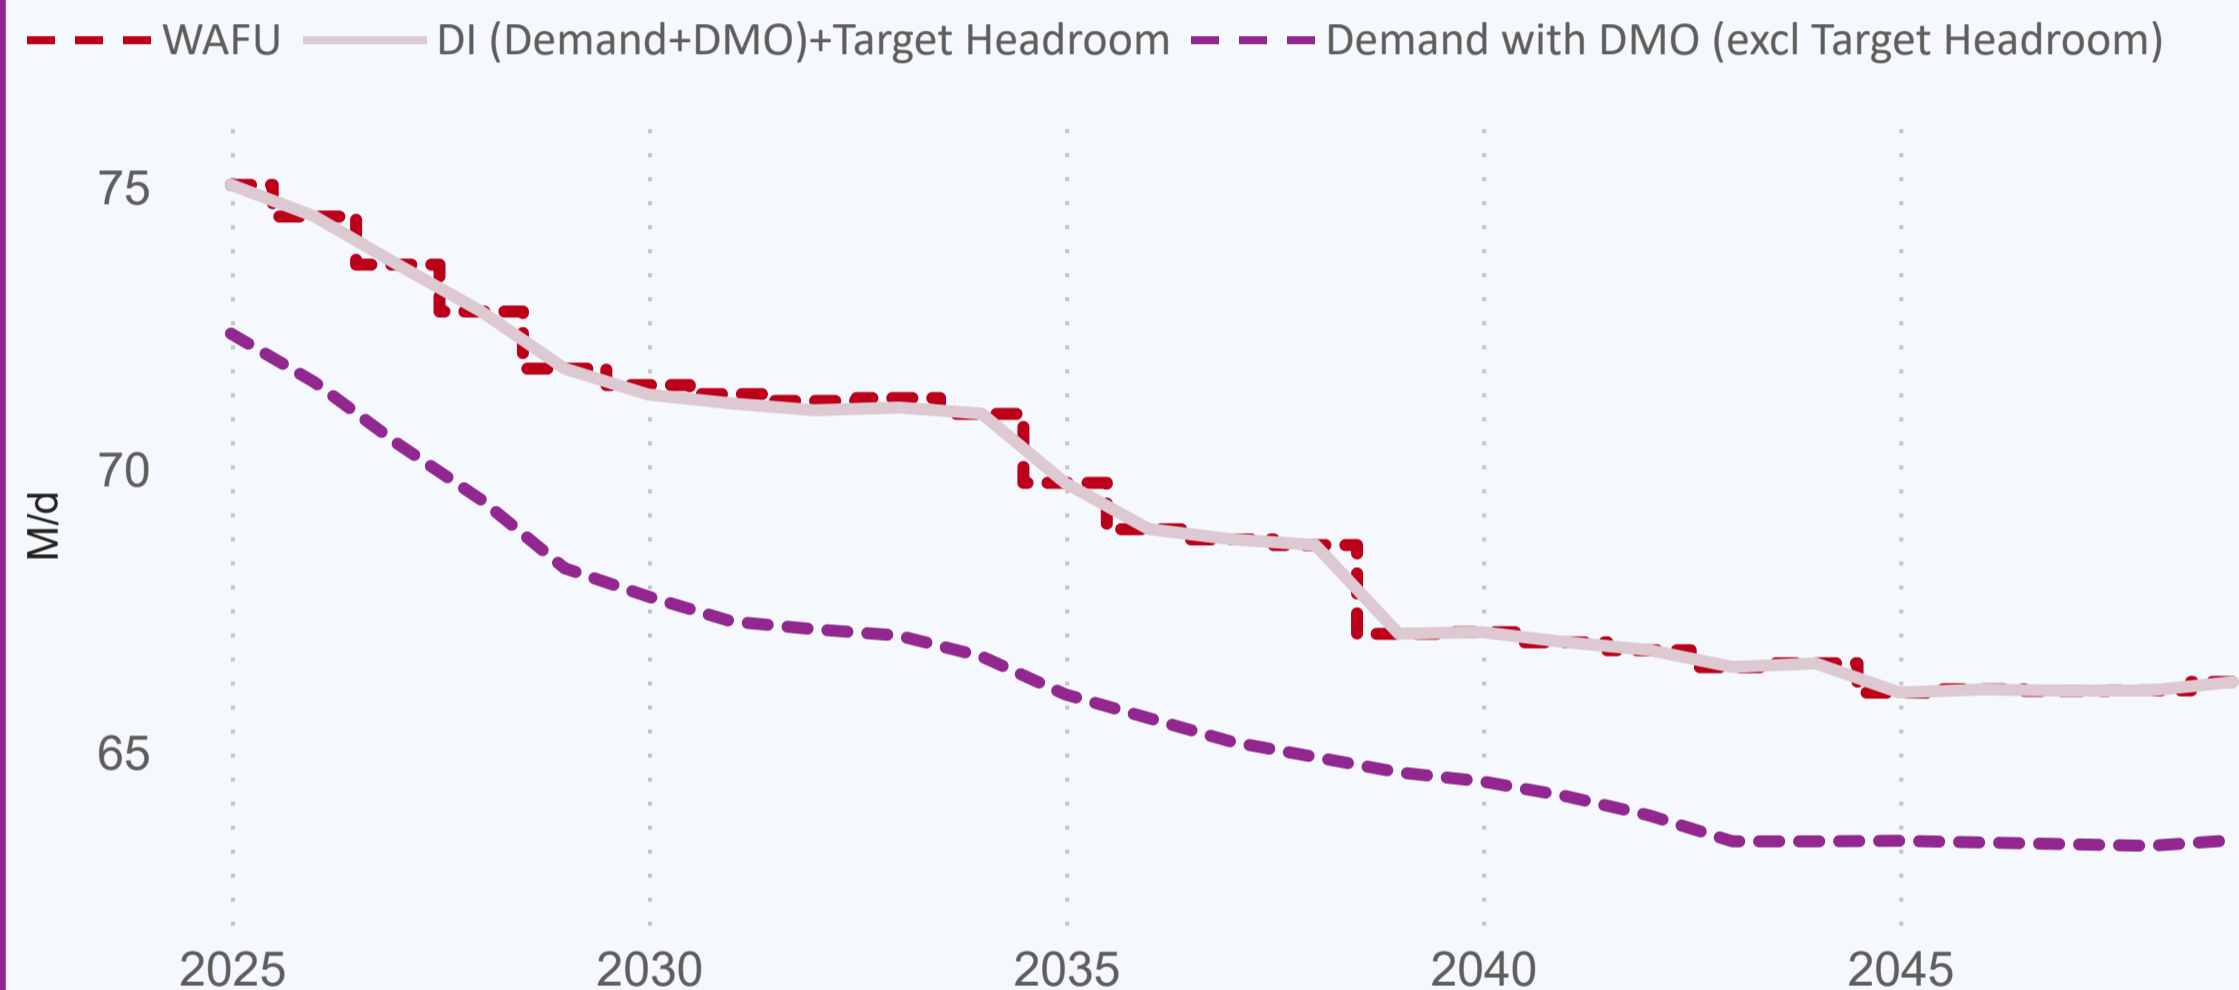


Table 9a: final plan SDB to 2050 for Dry Year conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	67.1	67.1	64.7	62.8	48.5	48.5
Net Transfers	7.9	4.7	6.3	4.3	18.0	17.7
Total Water Available For Use	75.0	71.8	71.0	67.1	66.6	66.2
Distribution Input	72.4	68.3	66.7	64.6	63.4	63.4
Target Headroom	2.6	3.5	4.3	2.5	3.1	2.8
Supply Demand Balance	0.0	0.0	0.0	0.0	0.0	0.0

Table 9b: Final Plan demand forecast for DYAA conditions (with preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	40.4	38.5	38.6	38.4	38.5	39.0
Water delivered unmeasured household	7.0	5.9	4.9	4.0	3.3	3.0
Total Leakage	9.3	8.4	8.2	7.6	7.0	6.6
Water delivered measured non-household	16.1	15.0	14.5	14.1	14.0	14.2
Water delivered unmeasured non-household	0.1	0.1	0.1	0.1	0.1	0.1
Distribution Input	72.4	68.3	66.7	64.6	63.4	63.4

### 9.1 DYAA FP supply demand summary: Suffolk East

The zone is in balance.

- Demand Forecast: Final Plan household demand (measured and unmeasured) is forecast to change from 47.4 MI/d in 2025 to 42.0 MI/d in 2050, a percentage change of -11.3 %.
- Final Plan Leakage is forecast to change from 9.3 MI/d in 2025 to 6.6 MI/d by 2050.
- Final Plan Non-Household demand is expected to change from 16.1 MI/d to 14.2 MI/d.
- Final Plan Distribution Input is expected to change from 72.4 MI/d to 63.4 MI/d by 2050.



# 10. Final Plan Supply Demand Balance DYCP

Suffolk East

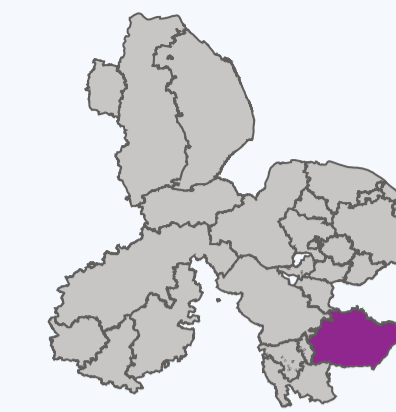


Figure 9: Suffolk East baseline supply demand balance to 2050 for Dry Year Critical Period conditions

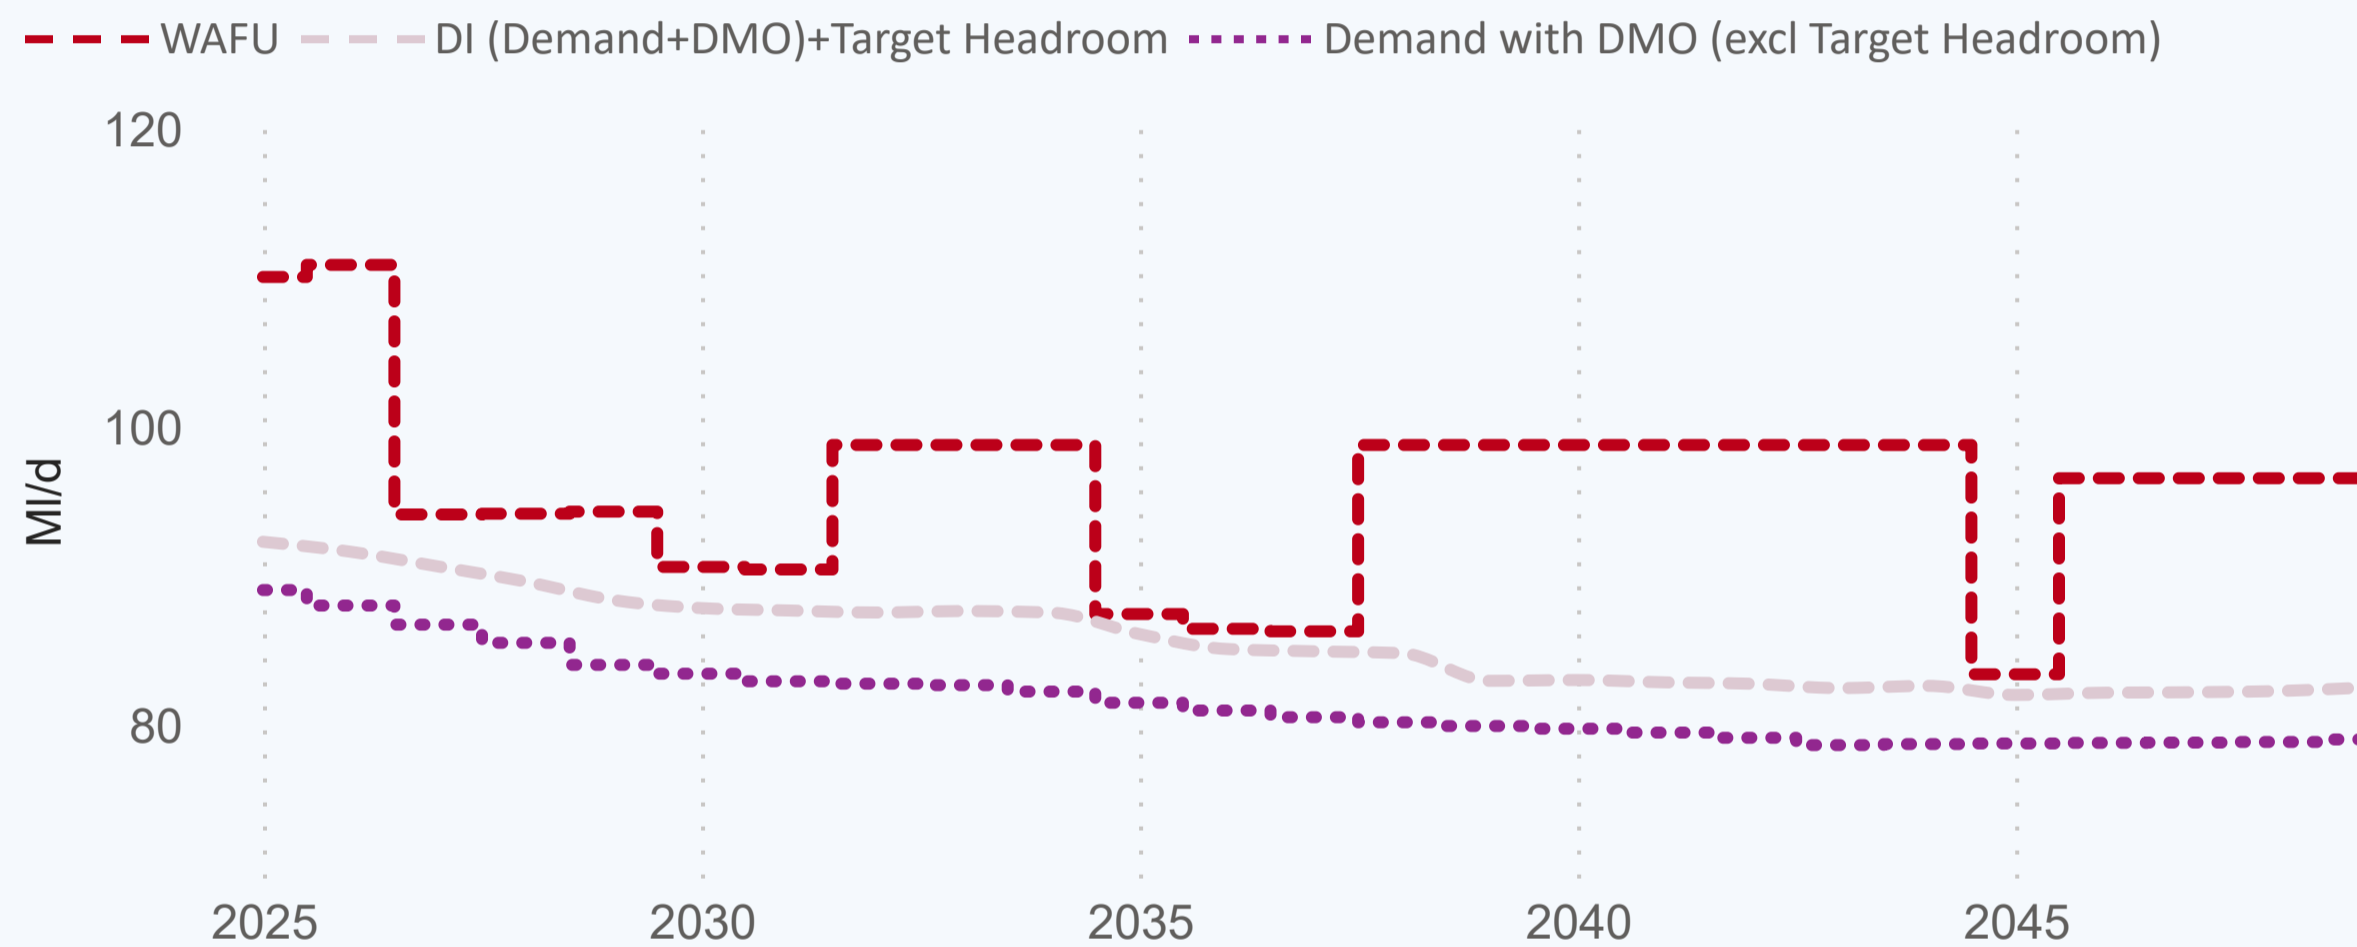


Table 10b: Final Plan demand forecast for DYCP conditions (with preferred demand management options)

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water delivered measured household	51.2	48.9	49.2	49.1	49.5	50.3
Water delivered unmeasured household	9.2	7.8	6.4	5.3	4.4	4.1
Total Leakage	9.3	8.4	8.2	7.6	7.0	6.6
Water delivered measured non-household	19.9	18.5	17.8	17.3	17.3	17.5
Water delivered unmeasured non-household	0.1	0.1	0.1	0.1	0.1	0.1
Distribution Input	89.1	84.1	82.3	80.0	78.8	79.1

Table 10a: Final Plan supply demand balance 2025 - 2050 for DYCP conditions

	2025-26 (start of AMP8)	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
Water Available For Use	96.1	96.1	98.0	98.0	98.0	95.8
Net Transfers	14.0	-1.8	0.8	0.8	0.8	0.8
Total Water Available For Use	110.1	94.3	98.8	98.8	98.8	96.6
Distribution Input	89.1	84.1	82.3	80.0	78.8	79.1
Target Headroom	3.2	4.3	5.3	3.0	3.9	3.5
Supply Demand Balance	17.8	5.9	11.2	15.8	16.2	14.0


## 10.1 DYCP BL supply demand summary: Suffolk East

The zone is in balance.

- Demand Forecast: Final Plan household demand (measured and unmeasured) is forecast to change from 60.4 MI/d in 2025 to 54.4 MI/d in 2050, a percentage change of -9.9 %.
- Final Plan Leakage: is forecast to change from 9.3 MI/d in 2025 to 6.6 MI/d by 2050
- Final Plan Non-Household demand: is expected to change from 19.9 MI/d to 17.5 MI/d.
- Final Plan Distribution Input: is expected to change from 89.1 MI/d to 79.1 MI/d by 2050.



# 11. Supply Side Strategy

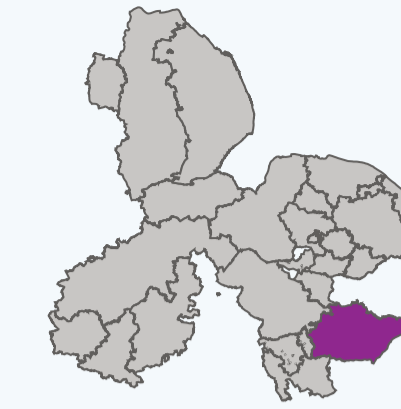

## Suffolk East


**Table 11a: Total Water Available for use Baseline and Final Plan**

	2029-30 (end of AMP8)	2034-35 (end of AMP9)	2039-40 (end of AMP10)	2044-45 (end of AMP11)	2049-50 (end of AMP12)
WAFU - BL	52.5	48.2	46.4	32.1	32.1
WAFU - FP	71.8	71.0	67.1	66.6	66.2

### 11.1 Supply side strategy options.

For details on the feasible options list for Suffolk East WRZ please refer to the Supply-Side Option Development technical supporting document.

**Figure 10 Water Available for Use (WAFU) - baseline (BL) and final plan (FP)**

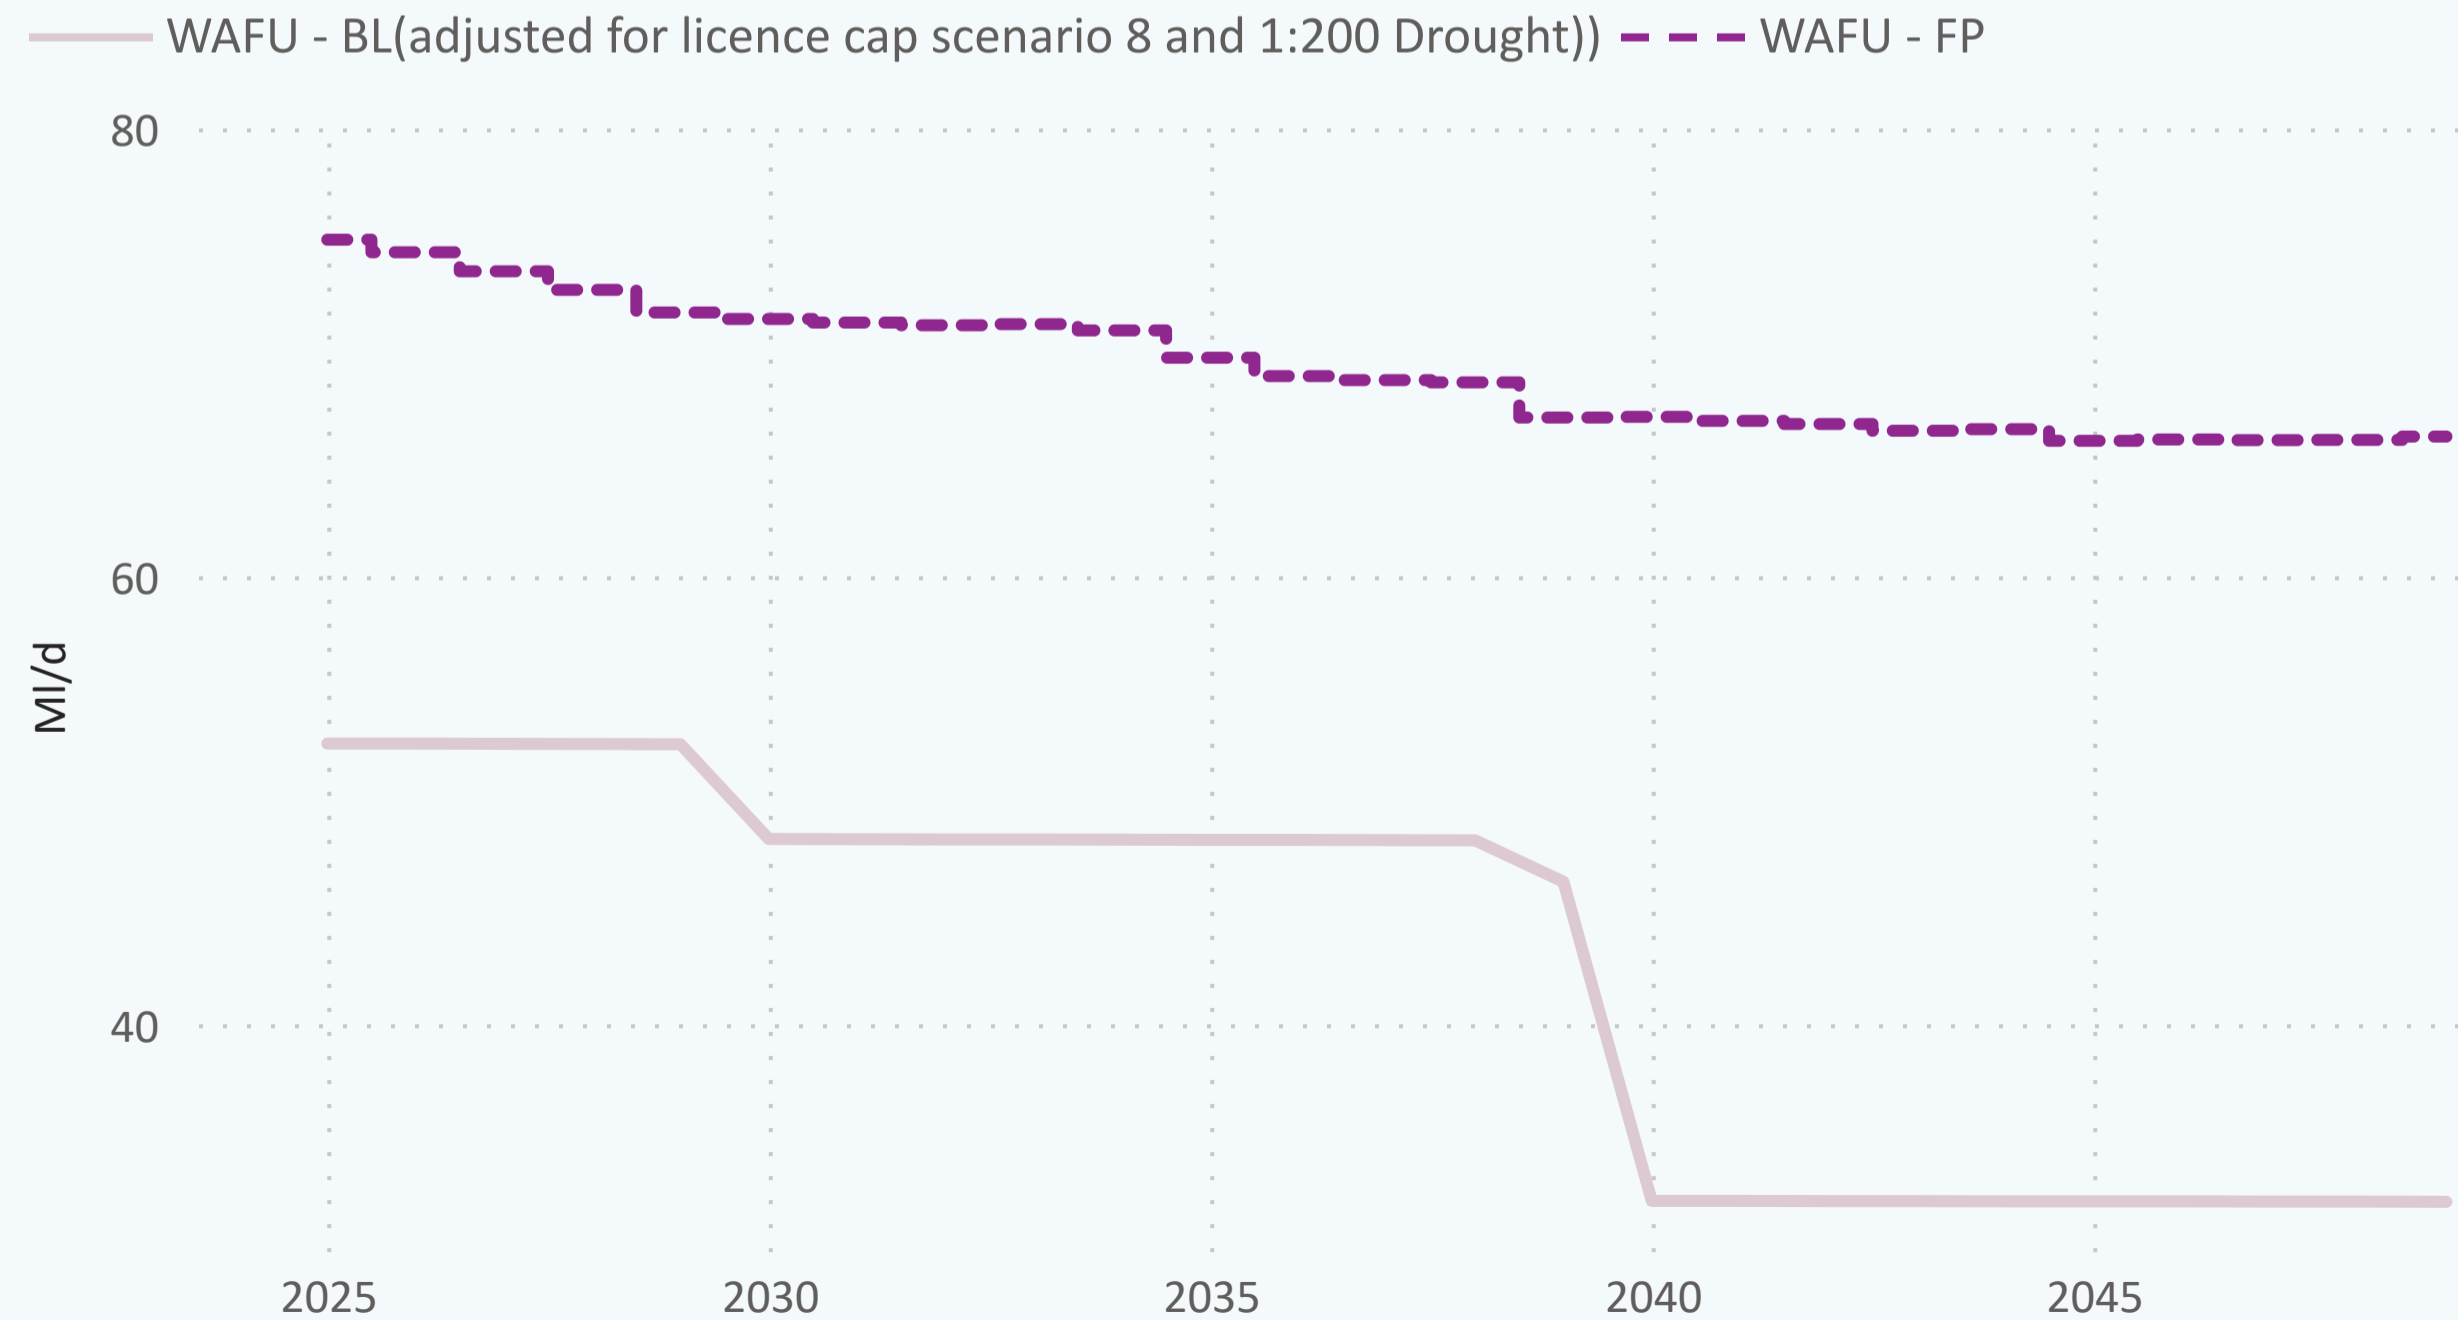

**Table 11b: Preferred supply side options**

Option ID	First Option Name
DA06	Adjustment to 1:200 drought
EE14	Adjustment to existing potable water export
EI15	Adjustment to existing potable water import
LC17	Adjustment for Licence cap scenario 8
SUE23	Suffolk East groundwater enhancement
SUE24	Suffolk Sudbury to East Suffolk potable transfer (5 MI/d)
SUE25	Suffolk East WTW backwash water recovery




# 12. Non-Household consumption

Suffolk East



Suffolk East

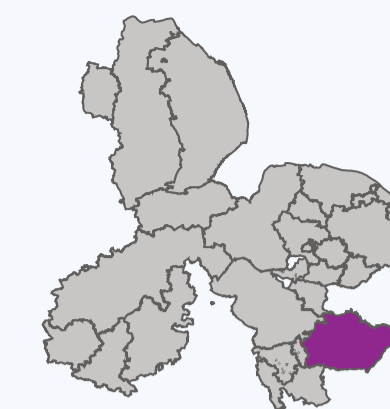

## 12.1 Non-Household demand Suffolk East

In 2025, 16.2 MI/d of Non-Household demand (measured and unmeasured) is expected. In 2049 it is expected to be 14.2 MI/d, which is a -12.58% change between the years.

Figure 11: Non-Household demand forecast 2025-2050

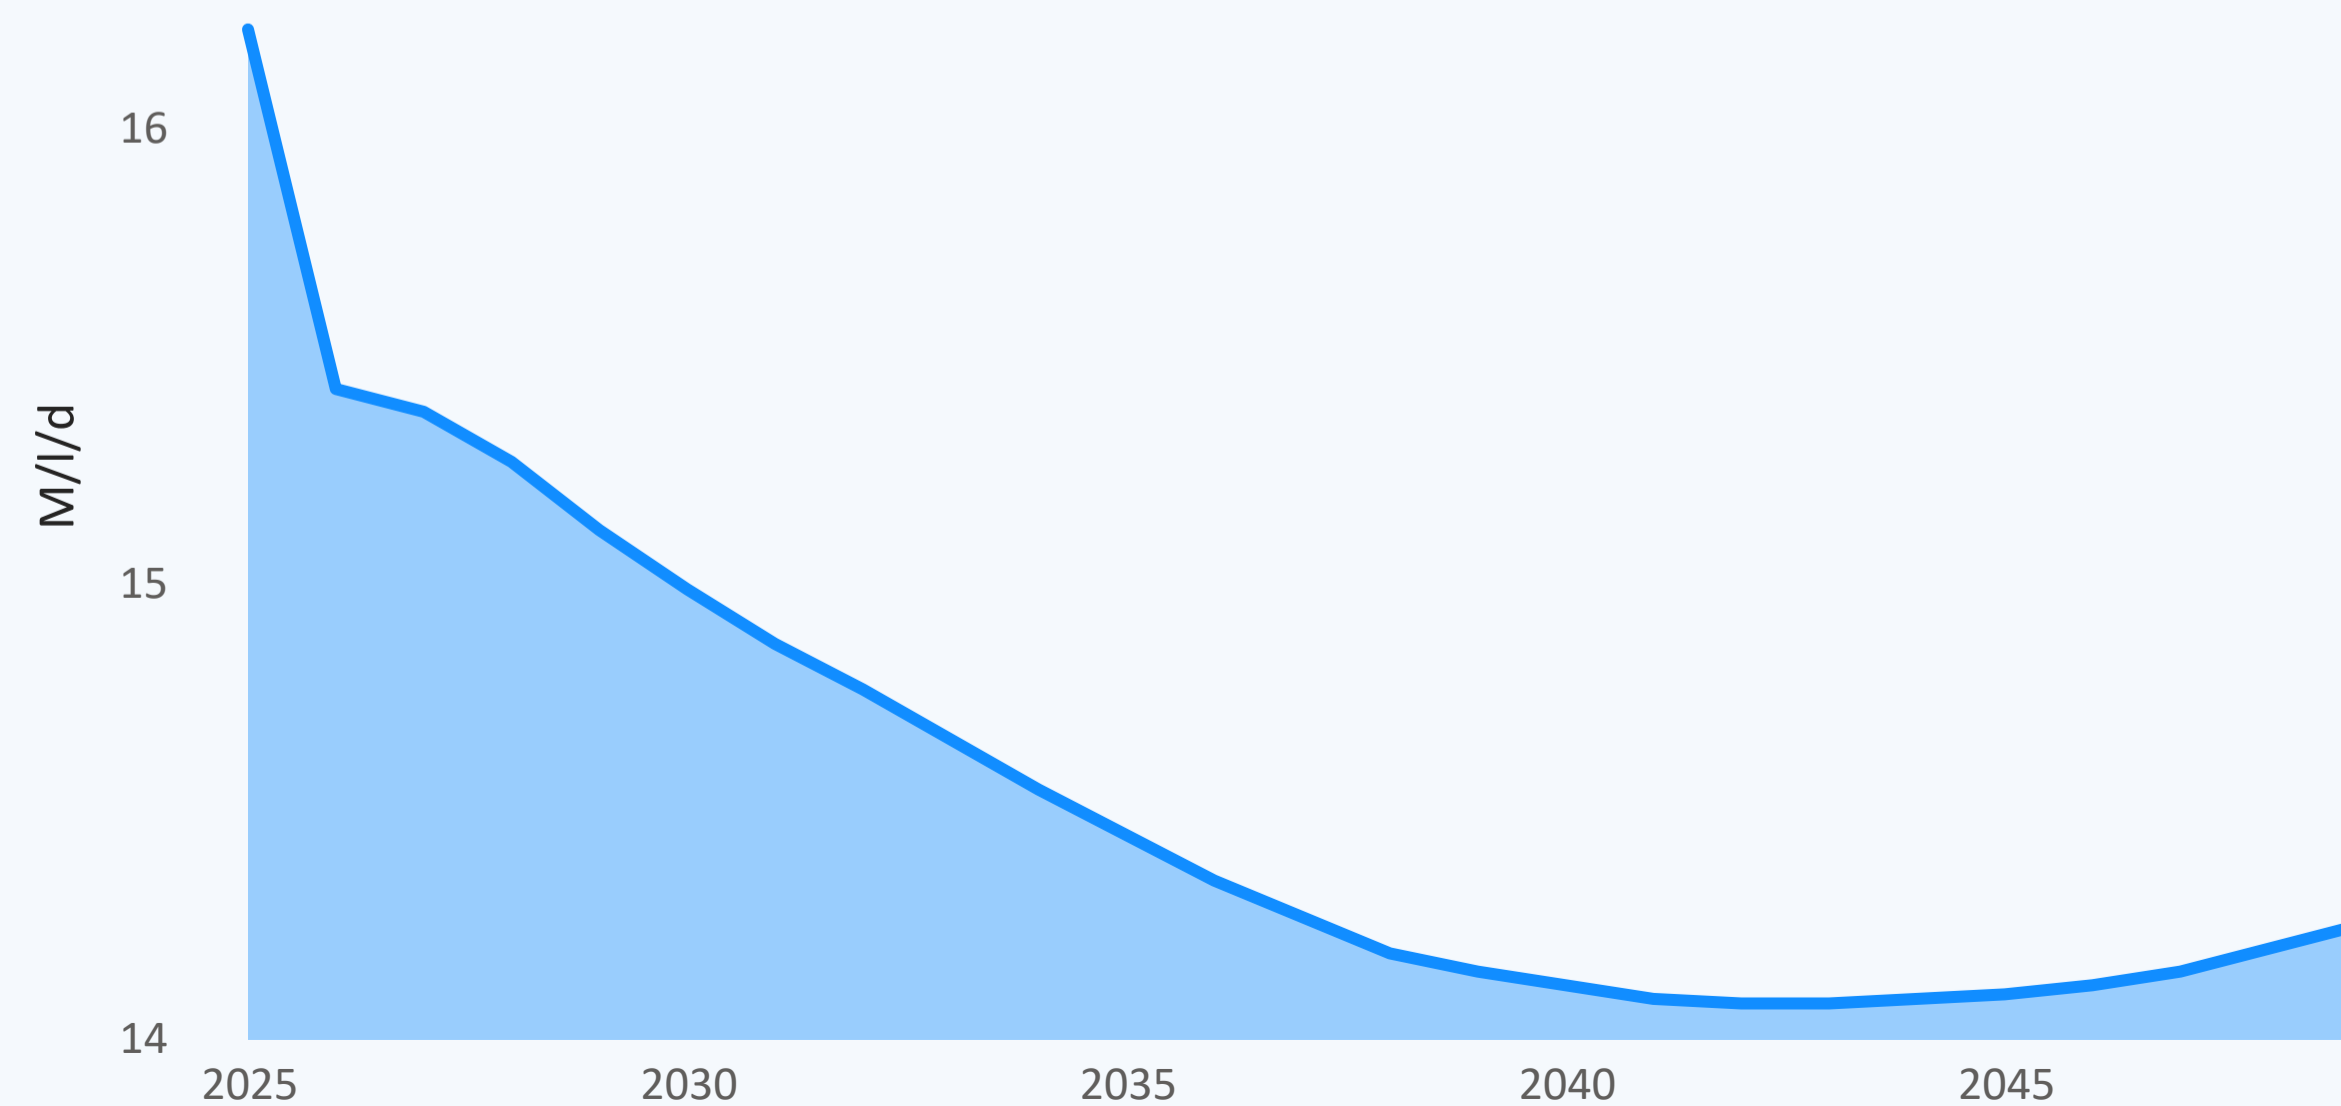


Figure 12: % Non-Household modelled sectors within resource zone

